



# Wood burning fires and stoves

2024/2025



 Dik Geurts

## Lovers of the real wood fire


The name Dik Geurts has been synonymous with craftsmanship and design ever since the company was founded, and over the past 40 years it has become a household name in the fireplace world. Since 2007 Dik Geurts has been fully integrated in DRU Verwarming B.V., an innovative company that has guaranteed top quality for centuries.

In addition to being designers, we at Dik Geurts are particularly fond of the real wood fire. In our factory in Duiven, The Netherlands, we work hard every day on the quality and ease of operation of our stoves and fires. With this brochure, we would like to show you how the combination of simplicity, experience and knowledge leads to beautiful fires and the most beautiful flames.

Dik Geurts is a trademark of DRU Verwarming B.V.



Scan the QR code and watch the DRU corporate video



<b>ENVIRONMENT</b> Wood firing and aeration	<b>4</b>
<b>WOOD STOVE TECHNOLOGY</b> Ingenious technology, simple to use	<b>8</b>
<b>DESIGN FIRES</b> 2-Sided, Front and Tunnel	<b>10</b>
<b>WOOD AND MULTI-FUEL STOVES</b> 3-Sided and Front	<b>24</b>
<b>INSERT AND BUILT-IN FIRES</b> Front (including fires with fan), Tunnel, 2-sided and 3-sided	<b>44</b>
<b>CONNECTION OPTIONS</b> Insert- and built-in fires	<b>60</b>
<b>CENTRAL HEATING FIRES</b> Front	<b>62</b>
<b>TECHNICAL DATA</b> Dimensions and characteristics	<b>64</b>

### Icons used



**kW** | Output  
Page 6



**EA** | External Air  
Page 7



**IR** | Infrared  
Page 9



**RS** | Room Sealed  
Page 7



**DG Smart Assist**  
Page 8

# Dik Geurts

*Creation of flames*



Scan the QR code and experience the passion of Dik Geurts wood fires.





Save on wood,  
fine dust and  
the environment





All wood burning stoves and fires in the Dik Geurts range have a particularly high efficiency. A higher temperature is reached in these closed and clever woodburners, and as a result combustion is much more complete and efficient. Even residual soot particles are fully burned, so you save on wood, emit less particulate matter and soot particles, and thus protect the environment.

### Ready for the future with EcoDesign

As of 1 January 2022, European legislation sets requirements for the minimum required efficiency of a stove and the maximum allowed emission of particulate matter. All Dik Geurts fireplaces and stoves comply with this legislation and carry the EcoDesign 2022 label. Several Dik Geurts fires and stoves are also Defra approved. For the right purchase, choose an environmentally friendly Dik Geurts wood stove for now and in the future.



### Climate neutral

In principle, heating with wood is CO<sub>2</sub> neutral. During the growth phase of a tree, CO<sub>2</sub> is absorbed from the air. When the tree is cut down and burned, the same amount of CO<sub>2</sub> is released into the atmosphere. In order to be able to remain climate neutral, sustainably sourced wood must be used. Therefore a new tree is planted for every tree that is cut down. This process ensures everything remains nicely in balance.

### Energy label

The Dik Geurts wood burning stoves are provided with an energy efficiency label. The greener the label, the better it is for the environment. Our stoves are all in the A-class or better.



# The right way to burn

## The best setup

With the so-called '**Swiss method**' you can burn wood safely and cleanly. At the bottom of the stove you should place large logs, on top of which you should put small pieces of wood, and on top of those, firelighters. Replenish the heating space when all that is left is a glow bed. Place a number of logs with the cleft side down in the fire box and open the air supply.

## The right wood

The fuel must be sufficiently dry and suitable as firewood. Good firewood has a moisture percentage of 15%-20%. You should never burn waste wood such as chipboard or old railway sleepers, or treated wood. The combustion of waste or treated wood can produce toxic fumes. As well as being unsafe, this is also very harmful to the environment.



Scan the QR code for an explanation video about burning wood.

**A Dik Geurts wood stove always has a high efficiency, low emissions of CO and fine dust and ultimate fire control. Guaranteed.**

## The right output

The output of a wood burning fire or stove must match the space you want to heat. If you have a fire with too much output, the room will soon become too hot. You will then not be able to let the fire burn to its full capacity and this can cause odour nuisance or extra pollution of the chimney. If the power is too low, you run the risk that the fire will not heat the room enough. This is especially annoying when the fire has an important function in the heating of your home. Dik Geurts offers a wide range of stoves and fires for larger and smaller rooms. Because Dik Geurts fires can also be fired at low power (4 kW), they are extremely suitable for use in spring or autumn.



**kW** (Output, indicated in kilo Watt).

## Fireplaces with outdoor air connection

Houses today are increasingly well insulated. To ensure that enough fresh air still enters the home, ventilation systems are often installed. It is therefore important to consider the supply air for combustion when choosing your fireplace. For instance, you can get the supply air from the setup room, but also from outside. To get the supply air for wood combustion from outside, it is important to equip a wood fire with an outside air connection. We distinguish between:



### EA ('External Air'), standard

- used in neutral or overpressure situations
- with the EA kit, oxygen for combustion can come almost entirely from outside
- possible for all fireplaces



### RS ('Room Sealed')

- used in low pressure situations in the living space
- oxygen for combustion comes entirely from outside
- Included with a large number of fireplaces


## Modern homes choose RS

RS wood-burning fireplaces are often installed in modern, passive and gap-tight homes. Before delivery, these fireplaces are tested for leak-tightness and provided with a certificate. Optimally suited for a balanced indoor climate and optimum heating pleasure.



## Calculate output

Calculate the content of the space you want to heat (length x width x height). Next, it is important to get an idea of the extent to which your house is insulated. For example, do you have double-glazing and wall and floor insulation everywhere? Then your home belongs to type A. Is your home not optimally insulated, without double-glazing in every window? Then your home belongs to type B. Is your home poorly insulated and with no double-glazing? Then your home belongs to type C. Knowing this you can see in the graph below what capacity (in kilowatts) is needed to heat your home.

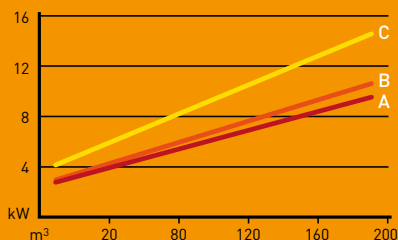

## Warm heart for Uganda

At Dik Geurts we care for the world around us, and human beings also deserve our attention. In our project 'A fireplace for you, a future for her', part of the proceeds from our fires is used to provide women in Uganda with a microcredit for a tree plantation.





# Thoughtful technique, simple to use



A Dik Geurts wood stove is not just a cabinet in which you can burn wood. It is a thoughtfully-designed device that ensures efficient and clean combustion at a high efficiency. Our fires and stoves have a closed combustion chamber (so no grate) that provides good insulation, and the flue gases that are released during combustion are led outside via an ingenious labyrinth.

## Infrared glass

At Dik Geurts we use infrared glass for a number of our fires and stoves to circulate the heat in the fire box. This gives a higher efficiency, retains the heat in the fire and as a result the glass stays clean much longer.



IR (Infrared)

## Vermiculite

The combustion chambers of all Dik Geurts fires are insulated with heat-retaining natural vermiculite. For a nice contrast with the yellow flames, the vermiculite in the combustion chamber of our Design fires is coloured dark anthracite.

## Floor plates

For a complete set-up and extra protection of the floor, we offer round, rectangular and square floor plates. Finished in dark anthracite steel and available in different sizes.



Optional floor plate



# Simple operation



## DG Smart Assist

### Automatic control

Always enjoy perfect combustion with DG Smart Assist. This smart system lets you easily control your wood fire via a smartphone or tablet. With automatic air control and wood refill notifications. DG Smart Assist makes burning wood easy, efficient and environmentally friendly.

### Control via app on smartphone or tablet

- Automatic air slide
- Select flame height and heat output
- Temperature sensor controls the air supply
- Always refill at the right time (saving on wood)
  - Notification via smartphone or tablet
  - Sound alert via wood stove
- Always an optimal restart

### Available on Dik Geurts wood stoves:

- Vidar Triple series (Small-Medium-Wall)
- Folke

Available on other Dik Geurts fireplaces soon..



Watch the DG Smart Assist video

Simple operation: just one lever



## Manual control

Dik Geurts fires and stoves are easy to operate. They have a single lever to regulate the surprisingly sophisticated air supply. Thanks to this, Dik Geurts fires and stoves ignite very easily.

Design fires

The eye-catcher  
for every interior







A design fire gives your home character and can be the beating heart of any interior. The Dik Geurts design fires can seem to float in space and at the same time form a natural unity with the rest of the room.

Page  
12



**ODIN FRONT**

Base  
Fixed  
Plateau  
Wall

Page  
14



**ODIN TUNNEL**

Base  
Fixed  
Plateau

Page  
16



**OVAL FRONT**

Base  
Fixed  
Legs  
Plateau  
Wall

Page  
18



**OVAL TUNNEL**

Base  
Fixed  
Legs  
Plateau

Page  
20



**BORA CORNER**

Cubes  
Fixed  
Floating Plateau  
Straight Plateau  
Wall

# Odin

## Function and design go hand in hand perfectly

The unique, round design not only makes the Odin a real eye-catcher, but its shape also makes for a great flame picture.

- Faster warmth while environmentally friendly
- Unique round glass window
- Hanging from the ceiling or on the wall or standing on a plateau or robust base



Base with external air connection



### Odin Front, Fixed

Efficiency 75,2% **A**  
WxDxH 606x380x606 mm



### Odin Front, Wall

Efficiency 75,2% **A**  
WxDxH 606x415x606 mm



### Odin Front, Base

Efficiency 75,2% **A**  
WxDxH 606x600x940 mm



Scan the QR code for a preview





### Odin Front, Plateau

Efficiency 75,2% **A**  
WxDxH 1600x380x842 mm



4-8 kW



EA



Scan the QR code  
for a preview



### Odin Tunnel, Fixed

Efficiency 75,0% **A** →  
WxDxH 606 x 400 x 606 mm

   
6-10 kW EA



Scan the QR code  
for a preview





Ultimate fire  
experience with  
two-way visibility  
and warmth



#### Odin Tunnel, Base


Efficiency 75,0% **A**  
WxDxH 606 x 600 x 940 mm



6-10 kW EA

#### Odin Tunnel, Plateau

Efficiency 75,0% **A**  
WxDxH 1600 x 400 x 842 mm



6-10 kW EA



# Oval

## The new style of heating

Typical Dik Geurts is this design fireplace with its oval shape. The various placement options make the Oval suitable for any interior.

- Beautiful fire view due to oval shape
- Unique air slide for easy control of flame intensity
- Wall-mounted, free hanging from the ceiling or standing on a plateau, robust base or legs




Base with external air connection




### Oval Front, Base

Efficiency 75,9% **A**  
W x D x H 980x380x944 mm




### Oval Front, Fixed

Efficiency 75,9% **A**  
W x D x H 980x380x606 mm




### Oval Front, Plateau

Efficiency 75,9% **A**  
W x D x H 2000x380x838 mm



### Oval Front, Wall

Efficiency 75,9% **A**  
W x D x H 980x380x606 mm







Scan the QR code  
for a preview

### Oval Front, Legs

Efficiency 75,9% **A**  
W x D x H 980x474x926 mm

  
6-10 kW

  
EA

  
RS





### Oval Tunnel, Fixed

Efficiency 81,5% **A+**  
W x D x H 980x380x606 mm



9-12 kW



IR



EA



RS



Scan the QR code  
for a preview





Unique design  
and a beautiful fire  
from two sides

### Oval Tunnel, Base

Efficiency 81,5% **A+**  
W x D x H 980x380x944 mm



### Oval Tunnel, Plateau

Efficiency 81,5% **A+**  
W x D x H 2000x380x838 mm



### Oval Tunnel, Legs

Efficiency 81,5% **A+**  
W x D x H 980x474x926 mm





# Bora Corner

## Robust cube with double-sided fire view

The two-sided glass window of the Bora Corner design fires gives a beautiful fire view. Hanging in the room or standing on a plateau, the Bora provides warmth and atmosphere throughout the area.

- Choose a left or right version
- Design fireplace for any position in the house
- Wide output range, optimally adjustable

### Bora Corner, Cubes

Efficiency 78,1% **A**  
WxDxH 625x577x1030 mm



4-9 kW



IR



EA



RS



Scan the QR code for a preview



### Bora Corner, Fixed

Efficiency 78,1% **A**  
 WxDxH 505x410x510mm



4-9 kW

IR

EA

RS



Scan the QR code for a preview



### Bora Corner, Floating Plateau

Efficiency 78,1% **A**  
 WxDxH 1200x450x829mm



4-9 kW

IR

EA

RS



Scan the QR code for a preview






Scan the QR code for a preview

### Bora Corner, Straight Plateau

Efficiency 78,1% **A**  
WxDxH 1500x450x879 mm

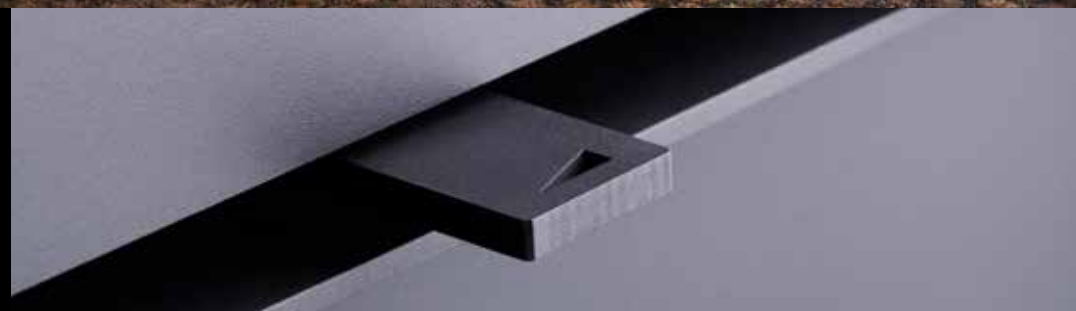

Plateau for wood storage is available in different sizes





### Bora Corner, Wall

Efficiency 78,1% **A**

WxDxH 505x448x510mm



4-9 kW



IR



EA



RS



Scan the QR code  
for a preview

Wood and multi-fuel stoves

Height of  
atmosphere  
and warmth

A long gaze into dancing flames, the cosy sound of a real crackling fire and the warmth from a natural source. With a Dik Geurts wood fire you bring the old-fashioned cosiness of a campfire to your living room.

Page  
26



**VIDAR TRIPLE**  
Small-Medium-Large  
Store  
Floating Plateau  
Straight Plateau  
Wall

Page  
30




**KALLE**

Page  
31



**FOLKE**

Page  
32



**MODIVAR 5**  
Store Front  
Store Corner  
Floating Plateau  
Straight Plateau

Page  
34



**SOREN 5**

Page  
34




**ASTE 5**

Page  
35




**LARS 1000**

Page  
36



**IVAR**  
5, Low  
5, High  
5, Store  
8, Low  
8, Store

Page  
42



**JANNIK**  
Medium, Low  
Medium, High  
Large



# Vidar Triple

## A stove to suit any home

Vidar stoves come in several shapes and sizes. There is always a suitable stove to suit your home.

- Freestanding with log compartment, standing on a plateau or wall-mounted
- Fits any room with a choice of 3 sizes
- Automatic control via smartphone or tablet
- Fitted with IR (infrared) side windows for extra-clean glass
- Optional elevated ash threshold



### Vidar Triple Medium, Floating Plateau

Efficiency 76,3% **A**  
W x D x H 1200x450x835 mm




4-9 kW IR EA RS DG Smart Assist



### Vidar Triple Medium, Straight Plateau

Efficiency 76,3% **A**  
W x D x H 1500x450x885 mm




4-9 kW IR EA RS DG Smart Assist



### Vidar Triple Medium, Wall

Efficiency 76,3% **A**  
W x D x H 662 x 430 x 535 mm



4-9 kW IR EA RS DG Smart Assist



Scan the QR code for a preview



## Vidar Triple Medium, Store

Efficiency 76,3% **A**  
WxDxH 662x410x850 mm



4-9 kW



IR



EA



RS



DG  
Smart  
Assist




Scan the QR code  
for a preview



### Vidar Triple Large, Wall

Efficiency 79,0% **A**  
 W x D x H 800 x 430 x 535 mm

6-10 kW IR EA RS DG Smart Assist 



Scan the QR code for a preview

### Vidar Triple Large, Store


Efficiency 79,0% **A**  
 W x D x H 800 x 410 x 850 mm

6-10 kW IR EA RS DG Smart Assist 



### Vidar Triple Large, Straight Plateau

Efficiency 79,0% **A**  
 W x D x H 1500 x 450 x 885 mm

6-10 kW IR EA RS DG Smart Assist 



More space,  
 modern style,  
 efficient heat




Scan the QR code for a preview





**Vidar Triple Small, Wall**  
 Efficiency 79,0% **A**  
 WxDxH 500x380x535 mm

4-7 kW IR EA RS DG Smart Assist

Scan the QR code for a preview

**Vidar Triple Small, Store**

Efficiency 79,0% **A**  
 WxDxH 500x360x850 mm

4-7 kW IR EA RS DG Smart Assist



**Vidar Triple Small, Floating Plateau**

Efficiency 79,0% **A**  
 WxDxH 1200x450x835 mm

4-7 kW IR EA RS DG Smart Assist



**Vidar Triple Small, Straight Plateau**

Efficiency 79,0% **A**  
 WxDxH 1500x450x885 mm

4-7 kW IR EA RS DG Smart Assist



Scan the QR code for a preview

# Kalle

Extra large  
windows for  
optimum  
fire view

The Kalle is an industrial wood burning stove with a handy wood compartment under the fire box. The three large windows provide a magnificent view of the flames.

- Tight freestanding wood burning stove with wood storage
- Fire view from three sides
- Economical in use due to very high efficiency (85%)



## **Kalle**

Efficiency  
WxDxH

85,0%

**A+** →

546x415x1000 mm



4-8 kW



EA

# Folke



Scan the QR code  
for a preview



## Folke

Efficiency  
WxDxH

77,3%  
476 x 410 x 1000 mm

**A**



4-8 kW



IR



EA



RS



DG  
Smart  
Assist

Thanks to the Folke's three-sided fire view, you can enjoy the lively flames even more. The wood compartment underneath the fire box gives this stove a rustic and atmospheric look, even when the stove is not burning.

- Unique air slide
- Automatic control via smartphone or tablet
- Heat reflective (infrared) side windows
- Suitable for mechanically ventilated and passive houses

Atmospheric,  
even when  
the stove is  
not burning



# Modivar 5

## Tight shapes and ultimate fire control

Thanks to their sleek shapes and dark steel, Modivar stoves are ideal for a modern interior. If you are looking for something really special then a floating plateau is worth it.

- Ultimate fire control thanks to simple air slide
- Integrated door handle
- Choice of wood compartments and plateaus

### Modivar 5, Floating Plateau

Efficiency 82,0% **A+**  
WxDxH 1200x450x857 mm



### Modivar 5, Straight Plateau

Efficiency 82,0% **A+**  
WxDxH 1500x450x907 mm



### Modivar 5, Store Front

Efficiency 82,0% **A+**  
WxDxH 450x368x1000 mm





### Modivar 5, Store Corner

Efficiency 82,0% **A+**  
Wx D x H 450 x 368 x 1000 mm



4,9-7 kW



EA



RS



Scan the QR code  
for a preview

# Aste 5 & Soren 5

## Woodburning stove with rural countryside look

The Aste 5 and Soren 5 have a sturdy appearance with crisp lines and plenty of fire visibility. It is easy to install in an existing situation. The cast-iron door and the classic legs give the stove a robust appearance.

- Ideal for placing in an existing fireplace
- Chimney connection only 10 cm from the back
- Stylish door handle



### Aste 5

Efficiency 82,0% **A+**  
WxDxH 486x350x555 mm  
Available with multi-fuel kit.



4,9-7 kW EA RS



Scan the QR code for a preview

### Soren 5

Efficiency 82,0% **A+**  
WxDxH 450x350x570 mm  
Available with multi-fuel kit.

4,9-7 kW EA RS



Scan the QR code for a preview



# Lars 1000



Scan the QR code for a preview

## Atmosphere, heat and slow-cooking

Above the glass window of the Lars 1000 wood burning stove there is a room that can be used as an oven. This stove offers atmosphere, warmth and also the possibility to prepare simple dishes.

- Unique oven at the top of the stove
- High efficiency
- Low particulate emissions thanks to high-quality combustion

### Lars 1000

Efficiency 82,0% **A+**  
WxDxH 448 x 348 x 1000 mm



4,9-7 kW



EA



RS



# Ivar 5

## Versatile source of atmosphere for the real enthusiast

The Ivar series is recognisable by the sleek cast iron door that offers a full view of the flames. Ivar stoves combine a compact and stylish appearance with the technically advanced combustion process for which Dik Geurts is known.




- Removable 'cold' handle
- Suitable for installation in existing spaces
- Wide output range & extremely low emissions





### Ivar 5, Low

Efficiency 82,0% **A+**  
WxDxH 450x350x555 mm  
Available with multi-fuel kit.

    
4,9-7 kW EA RS








### Ivar 5, High

Efficiency 82,0% **A+**  
WxDxH 450x350x660 mm  
Available with multi-fuel kit.



4,9-7 kW EA RS






Cast iron door with  
removable handle





### Ivar 5, Store

Efficiency 82,0% **A+**  
WxDxH 450x350x850 mm  
Available with multi-fuel kit.

    
4,9-7 kW EA RS





# Ivar 8



## Ivar 8, Low

Efficiency 76,6% **A** →  
WxDxH 540x350x555 mm  
Available with multi-fuel kit.



5-10 kW



EA



RS



Scan the QR code  
for a preview






Scan the QR code  
for a preview




### Ivar 8, Store

Efficiency 76,6% **A**  
WxDxH 540x350x850 mm  
Available with multi-fuel kit.



Large glass  
window with wide  
view of the fire

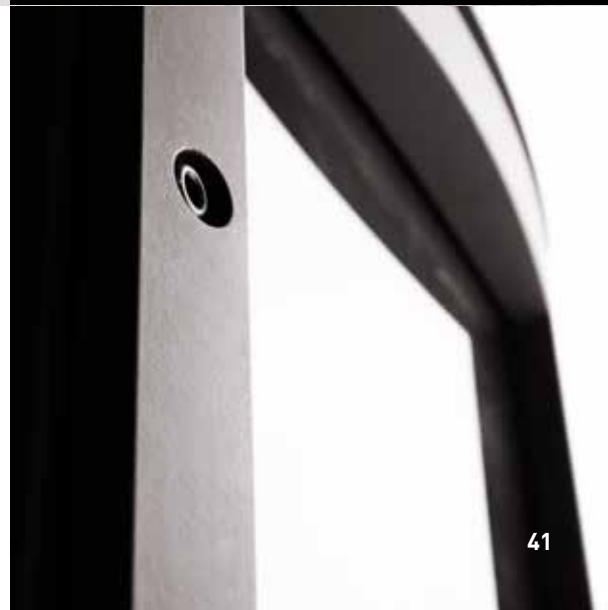

# Jannik

## Strikingly beautiful details, typically Dik Geurts


With the stoves in the Jannik series you recognise the robust details that are typical for the designs of Dik Geurts. Clean lines, sturdy hinges and a unique, slim handle. This handle provides easy access to the inside of the stove.

- Unique handle
- Wide power range
- Economical firing due to high efficiency of 87%



### Jannik Medium, High

Efficiency 82,0% **A+**  
WxDxH 550x375x900 mm



### Jannik Medium, Low

Efficiency 82,0% **A+**  
WxDxH 550x375x680 mm





### Jannik Large

Efficiency 87,0% **A+**  
WxDxH 620x380x780 mm



4-8 kW



EA





Inserts and built-in fires

The solution for  
renovation and  
new construction

Inserts are designed for installation in an existing situation. When converting or renovating, an old fire can be replaced easily by a modern and environmentally friendly fire with a higher output. Built-in fires are placed predominantly in new situations.

Page  
48



**FRONT  
INSTYLE**

500  
550  
600  
650  
700  
800  
1000

Page  
50



**FRONT  
PROSTYLE**

500  
550  
600  
650  
700  
800  
1000

Page  
52



**FRONT, FAN  
INSTYLE**

600V Next  
700V Next  
800V Next

Page  
54



**TUNNEL  
INSTYLE**

Tunnel 700

Page  
54



**TUNNEL  
PROSTYLE**

Tunnel 700

Page  
56



**2-SIDED SLIM  
INSTYLE**

Corner Slim 660/495  
Corner Slim 660/570

Page  
58



**2-SIDED  
INSTYLE**

Corner 660 Low  
Corner 660 High

Page  
59



**3-SIDED  
INSTYLE**

Triple 660 Low

# Instyle & Prostyle

## Inserts and built-in fires for every interior

Dik Geurts has a wide range of inserts and built-in fires. Tunnel fires, 3-sided fires, fires with an extra large glass window and different kinds of frames; we have a suitable fire for every interior.

The Instyle fires have a completely clear glass window. The Prostyle range with screen-printed glass are made for an even more beautiful view of the fire.



## Door and glass options



**Instyle fireplaces**  
Clear glass window




**Prostyle fireplaces**  
Black screen-printed glass



# Frames

A frame creates a neat and finished look for the built-in/insert fireplace. It hides any spaces between the fireplace and the surrounding wall, creating a seamless and professional look. At Dik Geurts, there is a very wide choice of frames in different styles.

## Standard frames for front and tunnel fires

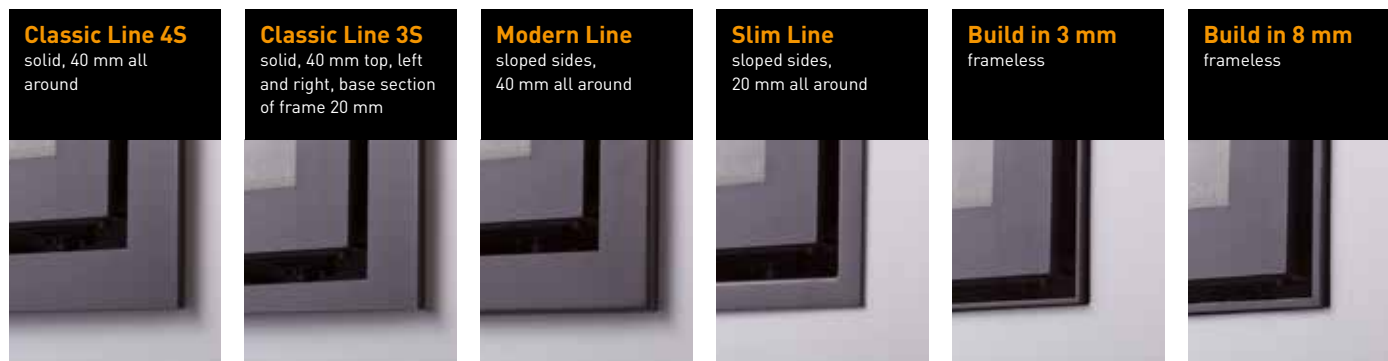

Frame type	Instyle/Prostyle	Instyle/Prostyle						
		500	550	600	650	700-Tunnel <sup>1)</sup>	800	1000
Classic Line 4S	WxH	580 x 537	587 x 617	660 x 537	710 x 552	760 x 657	860 x 637	1060 x 637
Classic Line 3S	WxH	580 x 517	n/a	660 x 517	710 x 532	n/a	n/a	n/a
Modern Line	WxH	580 x 537	587 x 617	660 x 537	710 x 552	760 x 657	860 x 637	1060 x 637
Slim Line	WxH	540 x 497	547 x 577	620 x 497	670 x 512	720 x 617	820 x 597	1020 x 597
Build in 3 mm	WxH	600 x 557	607 x 637	680 x 557	730 x 572	780 x 677	880 x 657	1080 x 657
Build in 8 mm	WxH	n/a	n/a	600x477	650x492	700x597	n/a	n/a

<sup>1)</sup> Frames on the Tunnel can be combined.

## Standard frames for front fires with ventilating fan



Frame type	Instyle	Instyle		
		600V Next	700V Next	800V Next
Classic Line 4S	WxH	640 x 547	740 x 667	840 x 647
Build in 3 mm	WxH	566 x 473	666 x 593	766 x 573

## Custom-made frames

The Dik Geurts product options are extensive. Nevertheless, it is possible that something does not fit during a conversion or renovation. In that case, a solid Classic Line 4S front frame can be custom-made to fit an existing fireplace opening. The width can vary between 20 and 100 mm.

### Available for fireplaces:

- Instyle/Prostyle 500, 550, 600, 650, 700, 800, 1000
- Instyle/Prostyle Tunnel
- Instyle 600V Next, 700V Next, 800V Next

# Instyle Front

Replace your old (open) fireplace for an eco-friendly one

The Instyle/Prostyle series consists of a number of models with different sizes, all using the same modern Dik Geurts techniques. With an Instyle you are assured of optimal enjoyment of a quality fire.


- Environmentally conscious enjoyment of fire
- Multi-purpose insert and built-in fires
- Different styles of detachable frames
- Choice of different frame types



## Instyle 500



Efficiency 82,0% **A+**  
WxDxH 580x350x537 mm



3-7 kW EA



## Instyle 550



Efficiency 81,0% **A+**  
WxDxH 587x350x617 mm



3-7 kW EA



## Instyle 600



Efficiency 79,6% **A**  
WxDxH 660x360x537 mm




3-7 kW EA



## Instyle 650




Rendement 80,5% **A**  
WxDxH 710x380x552 mm



3-9 kW EA



## Instyle 550

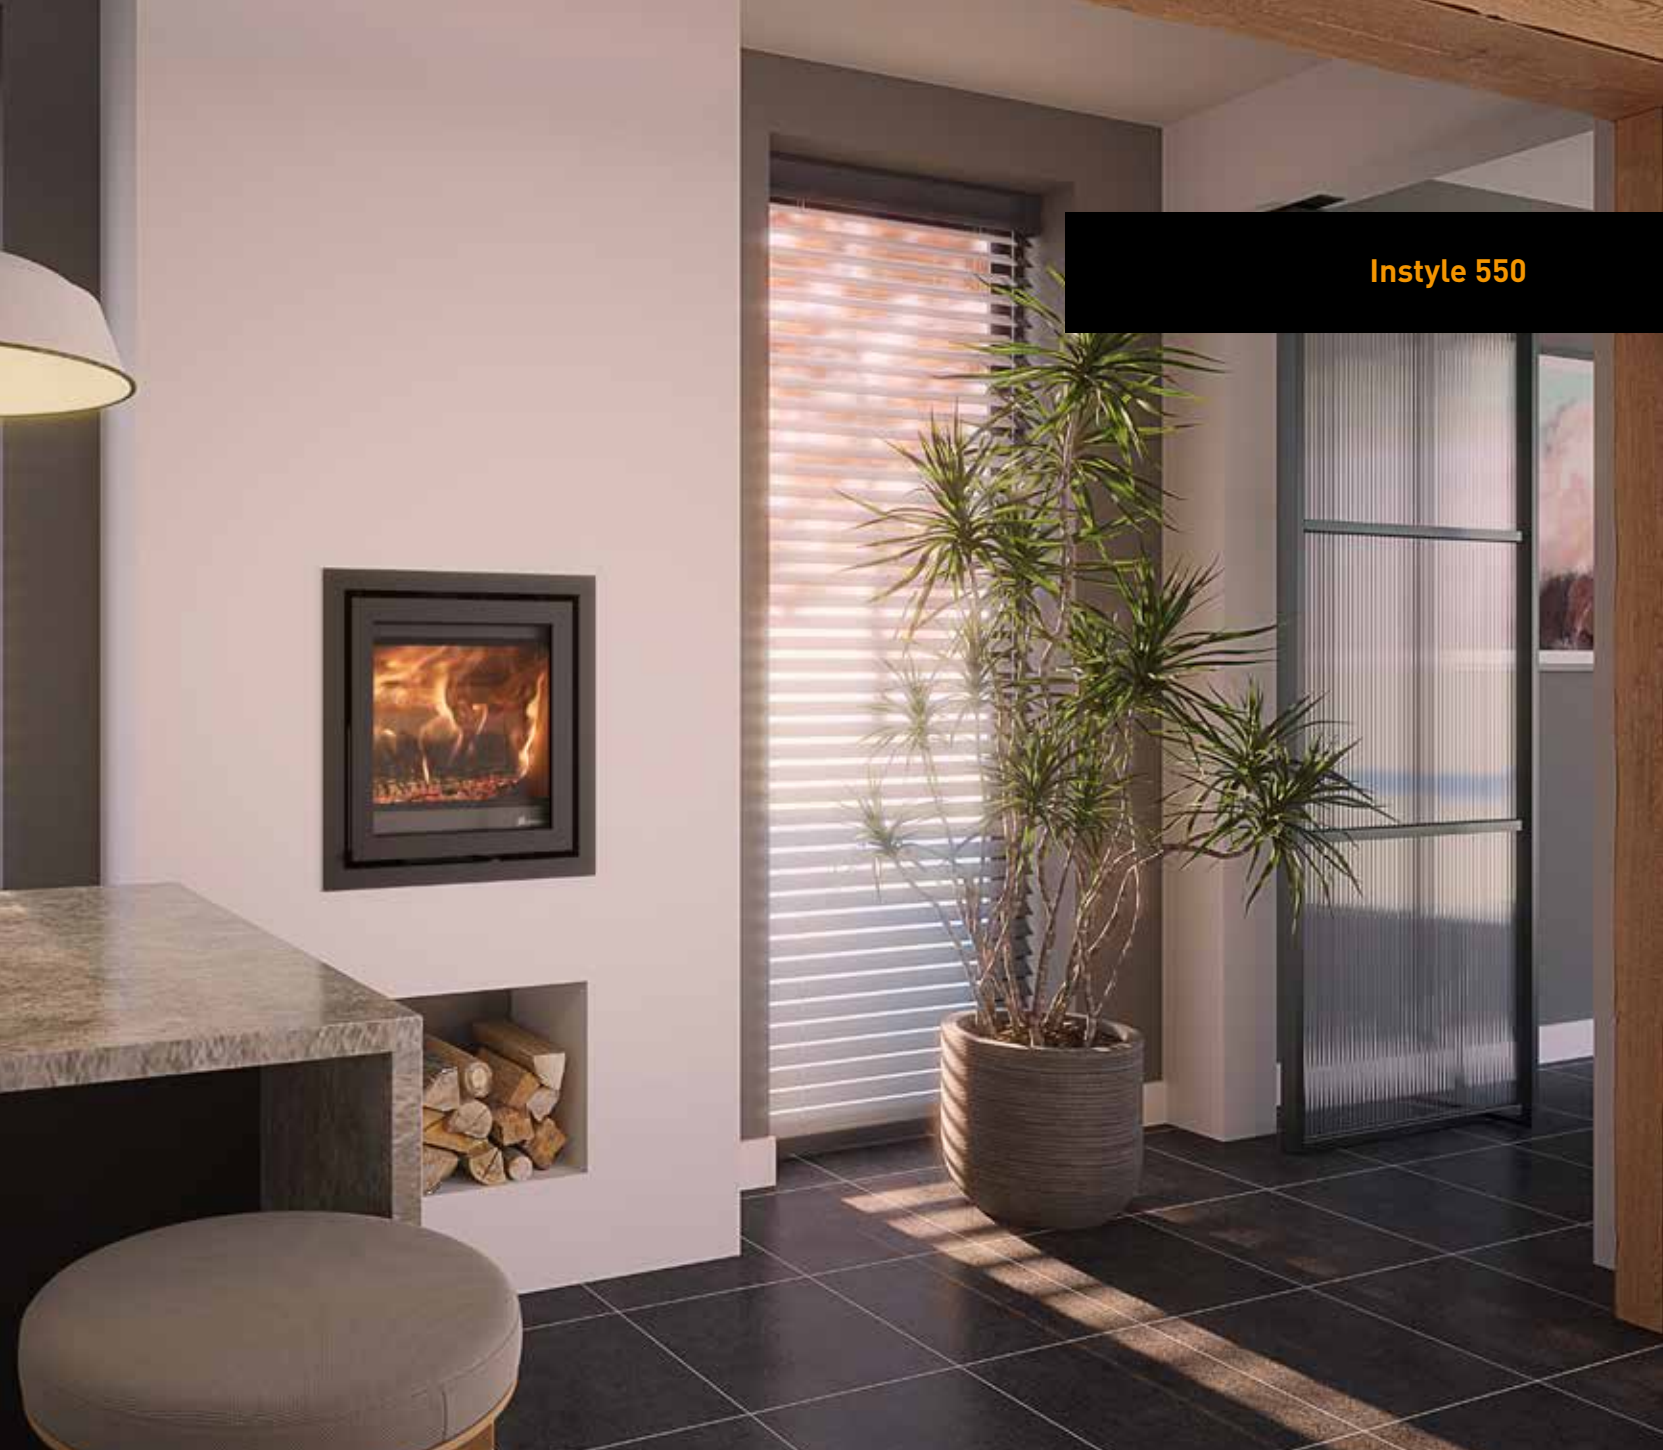

### Instyle 700

Efficiency 81,6% **A+**  
WxDxH 760x400x657 mm



6-12 kW EA



### Instyle 800

Efficiency 76,6% **A**  
WxDxH 860x400x637 mm



8-12 kW EA



### Instyle 1000

Efficiency 77,7% **A**  
WxDxH 1060x400x637 mm



9-13 kW EA





# Prostyle Front

Beautiful fire view  
thanks to black  
screen-printed glass

## Prostyle 1000



### Prostyle 500

Efficiency 82,0% **A+**  
WxDxH 580x344x537 mm



3-7 kW EA



### Prostyle 550

Efficiency 81,0% **A+**  
WxDxH 587x344x617 mm



3-7 kW EA



### Prostyle 600

Efficiency 79,6% **A**  
WxDxH 660x354x537 mm



3-7 kW EA



### Prostyle 650


Efficiency 80,5% **A**  
WxDxH 710x374x552 mm



3-9 kW EA



## Prostyle 550

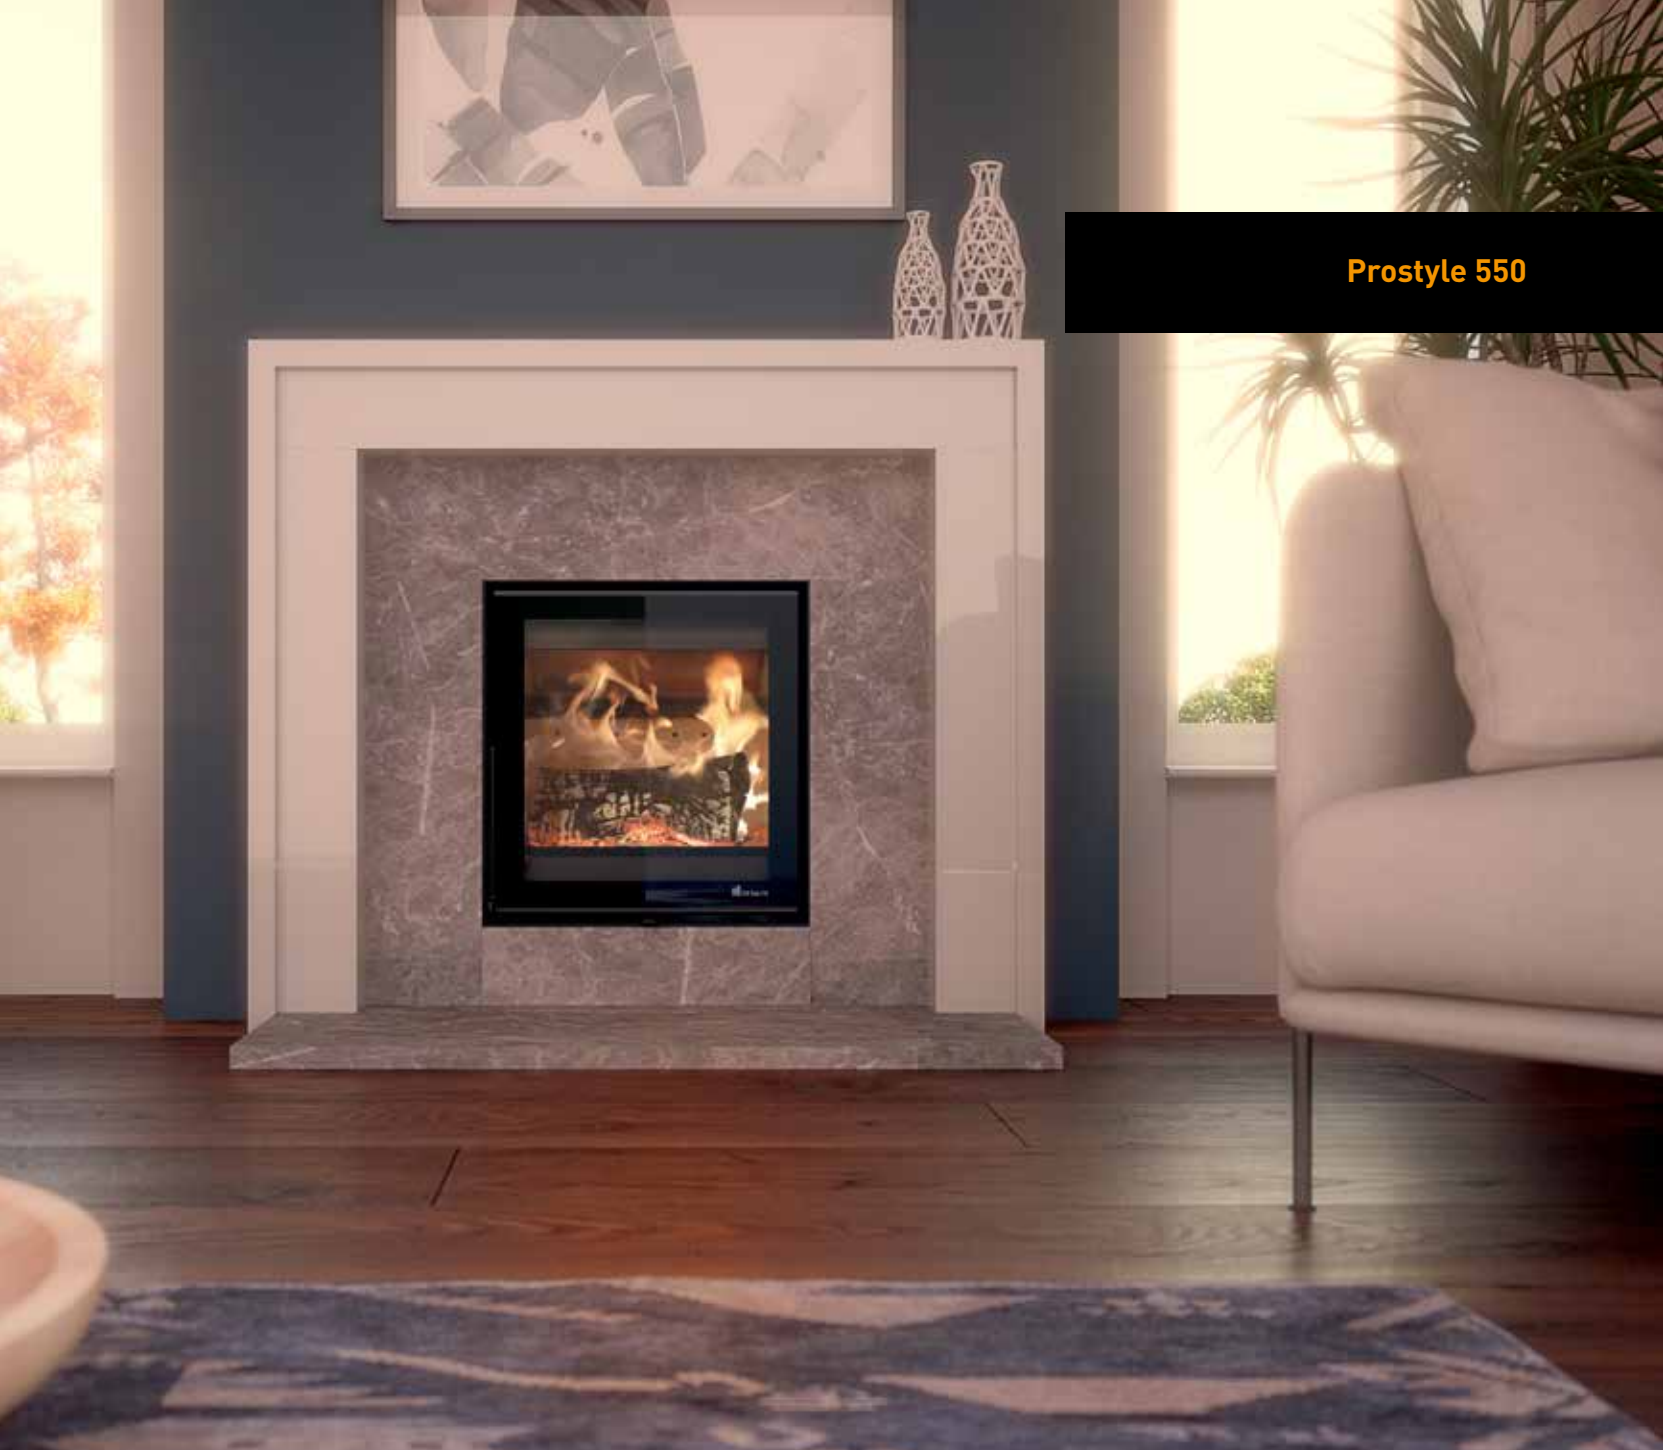

### Prostyle 700

Efficiency 81,6% **A+**  
WxDxH 760x394x657mm



6-12 kW EA

### Prostyle 800

Efficiency 76,6% **A**  
WxDxH 860x394x637mm



8-12 kW EA

### Prostyle 1000

Efficiency 77,7% **A**  
WxDxH 1060x394x637mm



9-13 kW EA



# Instyle Front, ventilator

## Fire insert with ventilating fan

These ventilated inserts are equipped with a ventilating fan, which heats a room faster. When switched on, a pleasant, warm airflow can be felt from the front of the fire or through the convection openings.

### Why Instyle V Next?

- Rapid heat distribution
- Impressive fire view
- Simple operation
- An efficient replacement for old fireplaces

### How does it work?

A special adapter gives you full control of the fan. There are four speeds for gradual to rapid heating. And, thanks to a smart control sensor, the fan automatically adjusts to the desired temperature.



More information?  
Watch the Instyle V Next video.

### Instyle 600V Next

Efficiency 79,6% **A**  
WxDxH 580x410x495mm



3-7 kW EA

### Instyle 700V Next

Efficiency 81,6% **A+**  
WxDxH 680x450x615mm



6-12 kW EA

### Instyle 800V Next

Efficiency 76,6% **A**  
WxDxH 780x450x595mm



8-12 kW EA





**Instyle 700V Next**



# Instyle & Prostyle Tunnel 700


## Splendid fire from two sides

The tunnel fireplaces Instyle and Prostyle Tunnel 700 have a hinged glass door on two sides. Thanks to its high output, this fire is ideal as a room divider in larger rooms.

- Beautiful see-through tunnel
- High output up to 12 kW
- In RS version almost completely airtight

### Instyle Tunnel 700

Efficiency 83,0% **A+**  
WxDxH 760x550x657 mm



9-12 kW EA RS

### Prostyle Tunnel 700

Efficiency 83,0% **A+**  
WxDxH 760x554x657 mm



9-12 kW EA



Scan the QR code  
for a preview

**Instyle Tunnel 700**



Scan the QR code  
for a preview



# Instyle Corner Slim

## Unique panoramic fire view

These two-sided wood stoves are characterised by their panoramic fire view. The glass panes are placed against one another in the corner. This continuous glass window, without a metal corner post between the two panes, provides a full view of the fire.

- Optimal view of the fire
- High efficiency
- Perfect for an existing chimney or new construction
- Optional build in frame



### Instyle Corner Slim 660/570

Rendement 80,0% **A**  
B x D x H 660 x 350 x 570 mm





Scan the QR code  
for a preview



### Instyle Corner Slim 660/495

Efficiency 75,2% **A**  
WxDxH 660x350x495 mm



4-10 kW



EA




RS



### Optional build in frame 6S

- For a seamless finish to the fireplace assembly
- Very suitable for installation in a new build situation
- Width 6 cm (working width 5 cm)
- Solid frame, thickness 6 mm

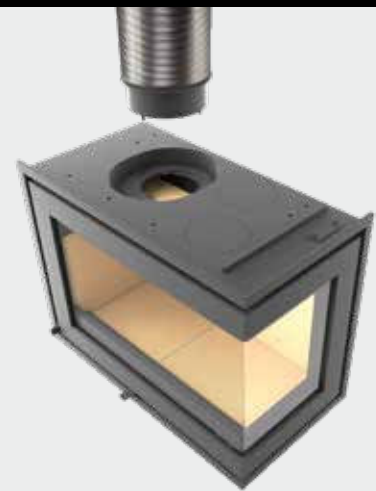



### SlideConnect®

(only at Instyle Corner Slim 660/495)

- Easy connection to an existing or new flue
- Rotatable ring with 4 cm extra working space
- A major advantage, especially in existing situations

### Instyle Corner 660 Low

Efficiency 76,3% **A**  
WxDxH 660x350x495 mm

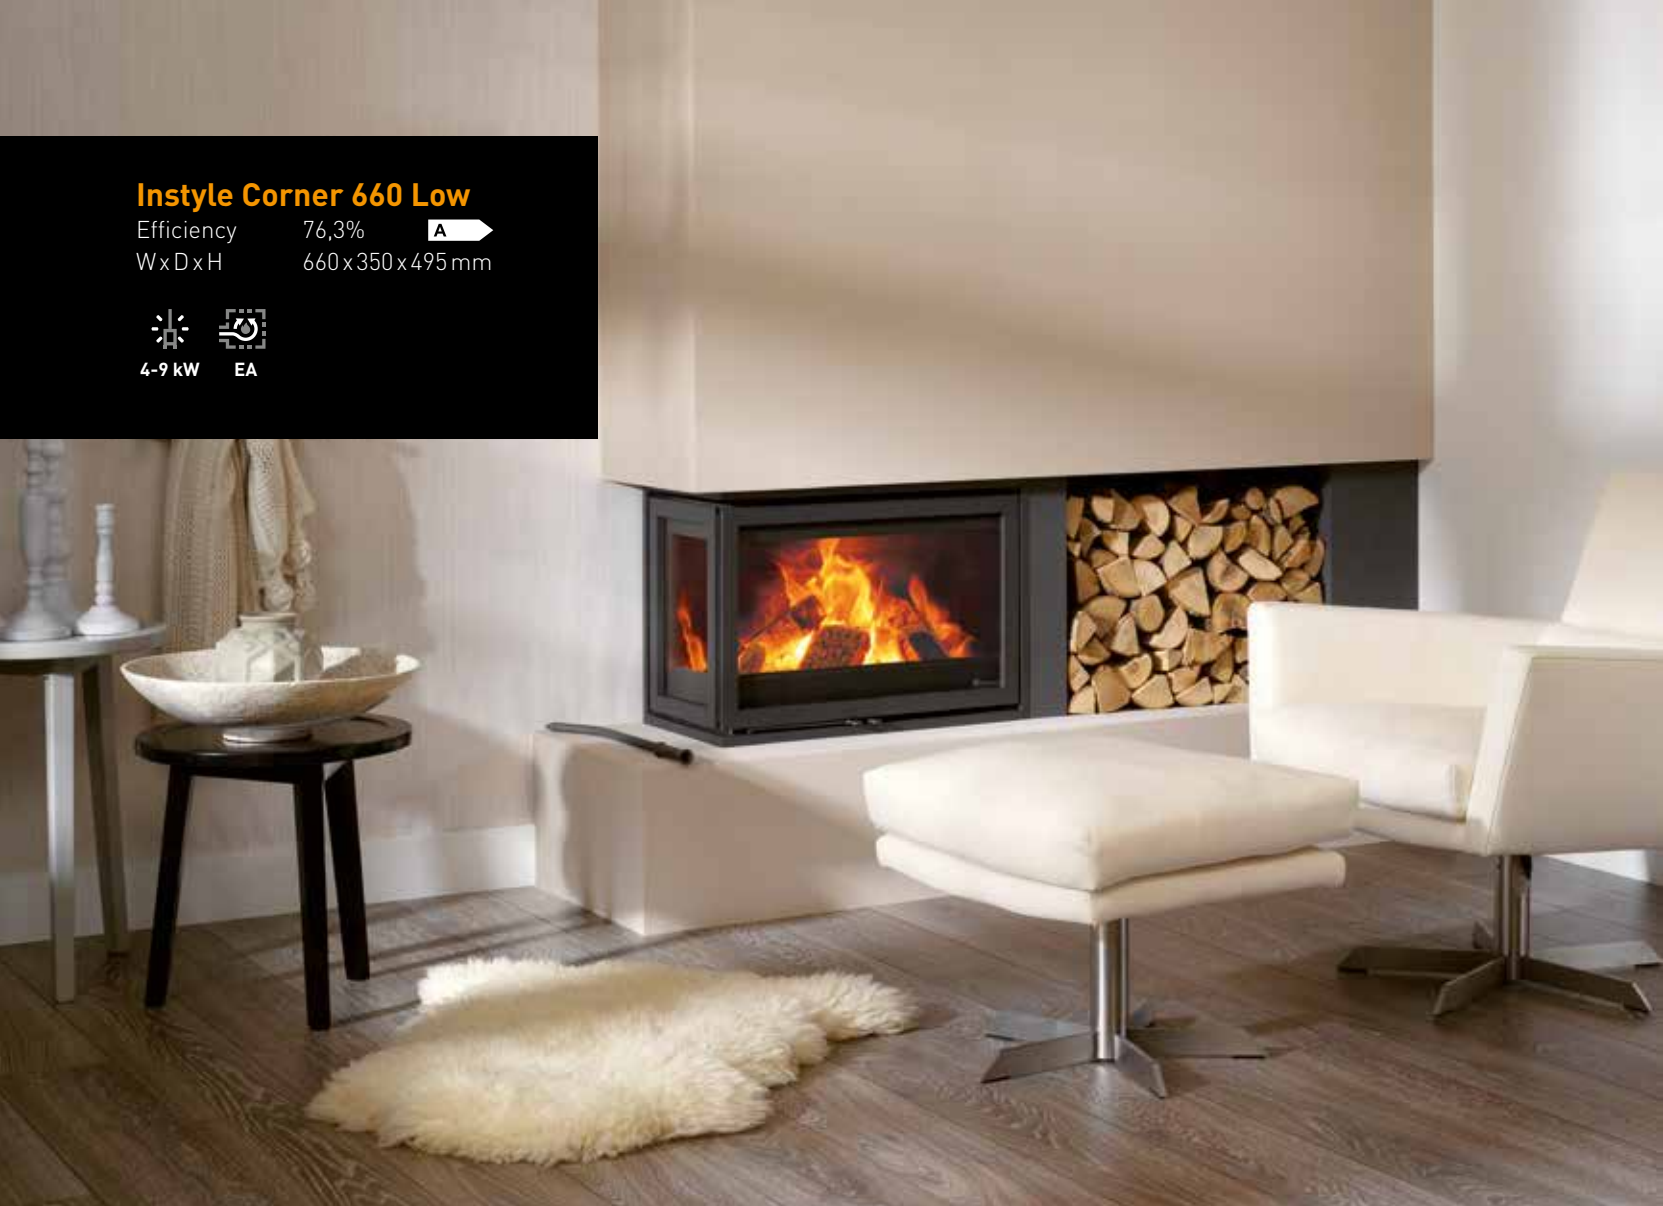

# Instyle Corner

Spacious insert  
with wide fire view

### Instyle Corner 660 High

Efficiency 76,3% **A**  
WxDxH 660 x 350 x 520 mm





# Instyle Triple

## Three sided glass and three sided fire

To ensure the highest possible efficiency, this insert is fitted with side windows with heat-reflecting infrared glass. This fire is only 49.5 cm high and therefore ideal for installation in most existing fireplaces.

- Subtle corner bars for better fire vision
- Suitable for installation in existing situation
- In RS version almost completely airtight

### Instyle Triple 660 Low

Efficiency 76,3% **A**  
WxDxH 662x380x495 mm



4-9 kW



IR



EA



RS



# Easy installation

The various connection options ensure that the stove is quick and easy to install, regardless of the installation situation. There are three options for flue gas extraction.

1. Connection without drain material to an existing chimney flue (**sealing with ceramic wool**)
2. Connection with flexible or fixed pipe (**Liner Kit Pro**), Ø 150 or 180 mm
3. Connection with rejuvenated pipe (**connection piece**), Ø 150 or 180 mm

## External air kit

Kit for supply of fresh air from outside, ideal for fully insulated houses

- Optional at 500 - 1000, 600V, Tunnel (only base)
- For rear and base connection
- Dimensions: Ø 80 mm



## Linerkit Pro

Connection piece for flexible or rigid pipe.


- Optional with: 500 - 1000, 600V, Corner, Triple, Tunnel
- Connectable from the inside of the fire
- Reducer with 3 screw holes
- Dimensions: Ø 150 mm, Ø 180 mm



## Connection piece

Connection piece for rejuvenated pipe.

- Optional at: 500 - 1000, 600V, Corner, Triple, Tunnel
- Reducer with 3 screw holes
- Dimensions: Ø 150 mm, Ø 180 mm



## Convection kit

Connecting rings (2 pieces) for mounting on the convection holes.


- Optional with: 500 - 1000, 600V, Corner Slim, Tunnel
- For more heating power
- Dimensions: Ø 125 mm




## INSERT-/BUILT-IN FIRES CONNECTION OPTIONS

Instyle / Prostyle


### External air kit




### Linerkit Pro



### Connection piece



### Convection kit





### Easy air control


- At the front of the fire
- Both Instyle and Prostyle finishes

### Door lock

- Stable and flexible door closure
- The cord ensures a good seal
- The door is adjustable and exchangeable
- Kit for self-closing door optional for Instyle 500-1000 series and Instyle Tunnel





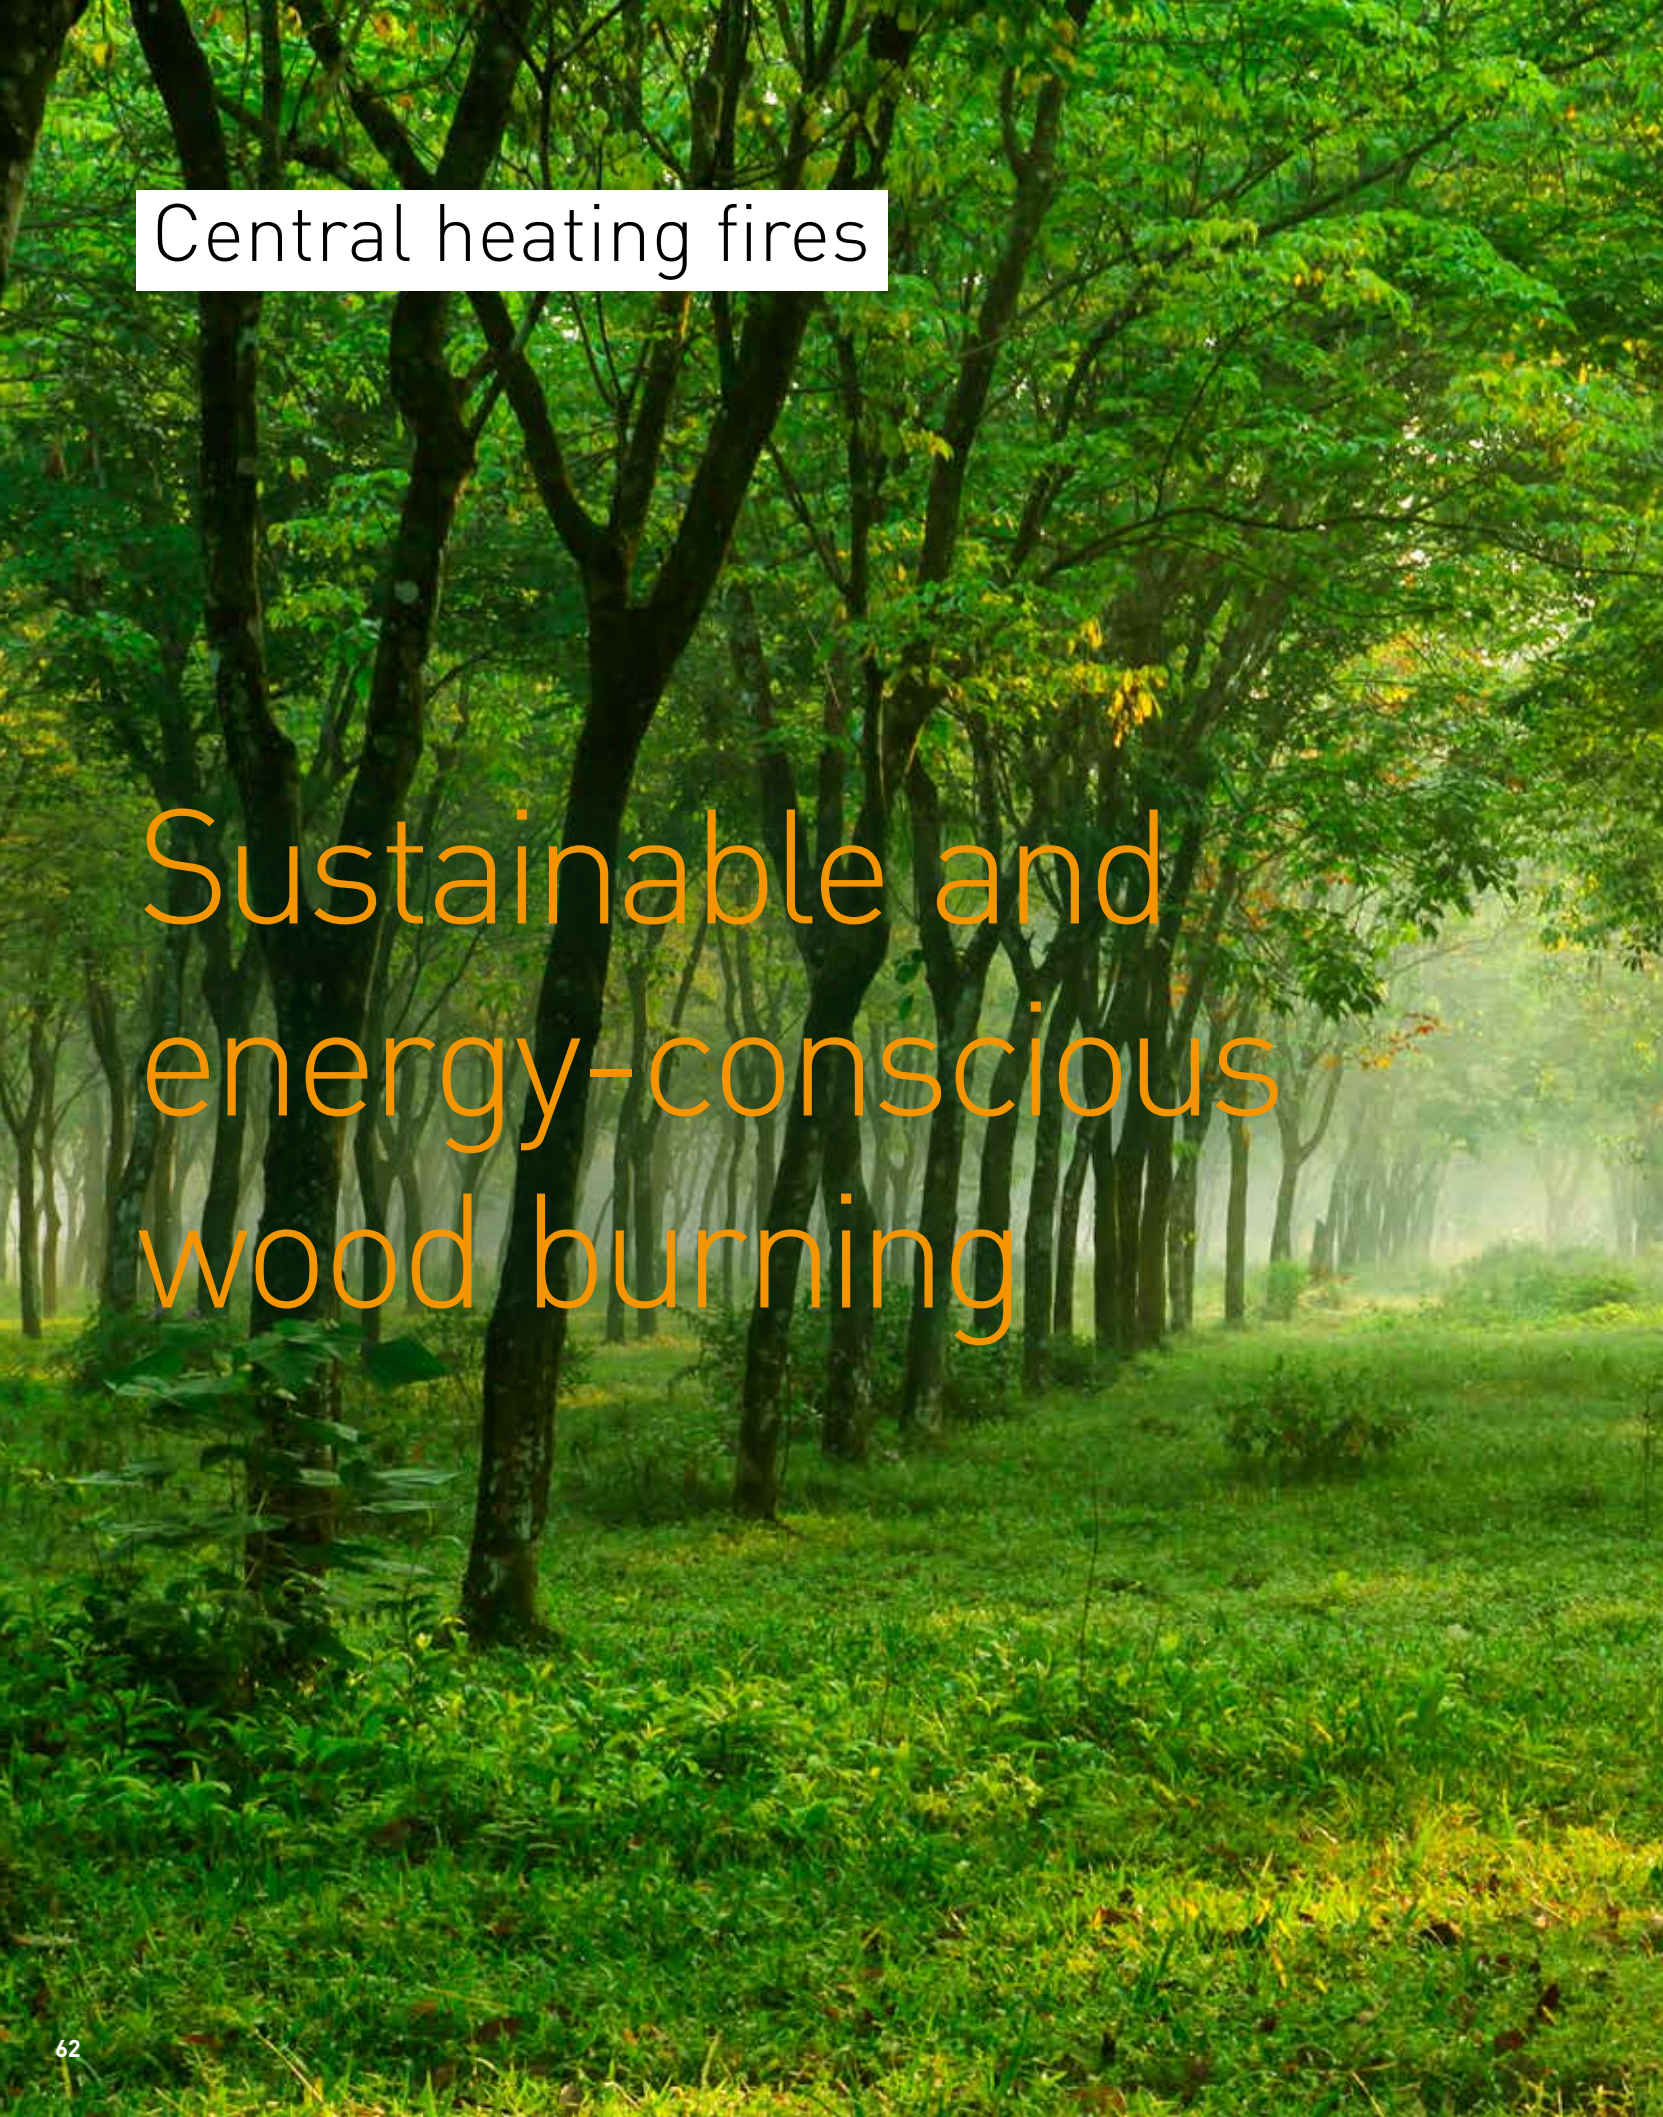

Central heating fires

# Sustainable and energy-conscious wood burning



Green Design stands for sustainable, environmentally friendly and energy-conscious heating of fires and stoves connected to a central heating system.

Dik Geurts also supplies fires that you can connect to a central heating system, an environmentally friendly alternative way to heat your home. With these fires the hot flue gases are used to heat the water for your central heating system. Doing this means you get more efficiency from your fire or stove, resulting in a lower energy bill – and it's also sustainable.

- Environmentally friendly heating
- Durable/lower energy usage
- Suitable for any type of home
- Can be combined with solar panels and heat pumps
- Lower energy bill
- Maintenance friendly

**More info**

If you want to know more about Green Design or the operation of central heating fireplaces, visit [www.greendesign.eu](http://www.greendesign.eu).



**Ivar 10 H2O, Store**  
 Efficiency 81,5%  
 WxDxH 650 x 468 x 1000 mm


8-12 kW IR EA RS A+

# Technical drawings

## DESIGN FIRES


Odin Front

**Odin Front, Fixed**

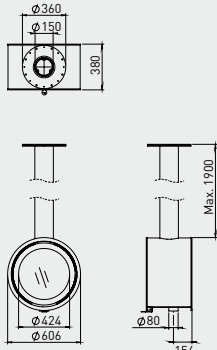


P. 12

**Odin Front, Base**

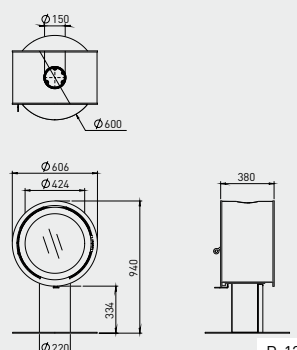


P. 12

**Odin Front, Wall**

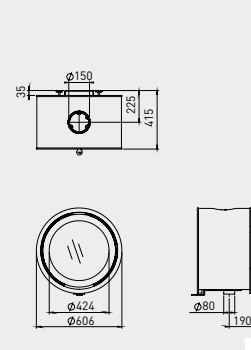

P. 12


**Odin Front, Plateau**

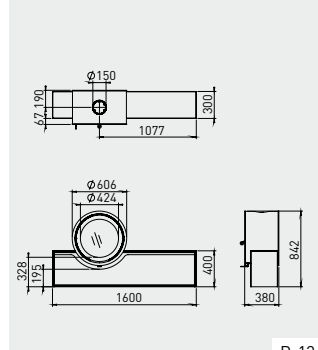

P. 13


Odin Tunnel

**Odin Tunnel, Fixed**

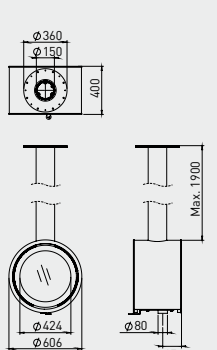


P. 14

**Odin Tunnel, Base**

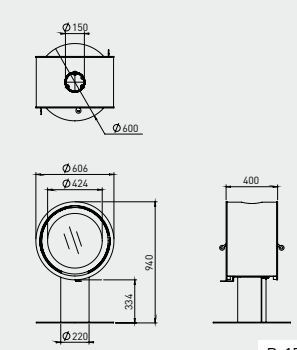

P. 15


**Odin Tunnel, Plateau**

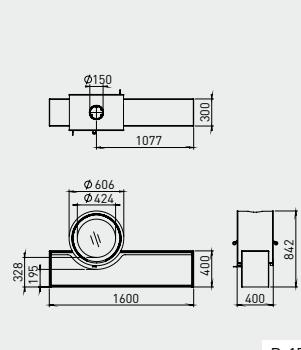

P. 15


Oval Front

**Oval Front, Fixed**

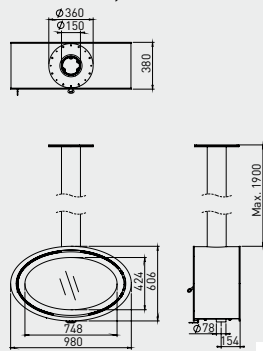


P. 16

**Oval Front, Base**

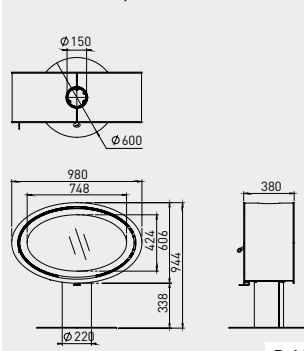


P. 16

**Oval Front, Legs**

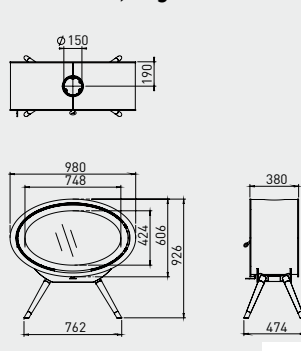


P. 17

**Oval Front, Plateau**

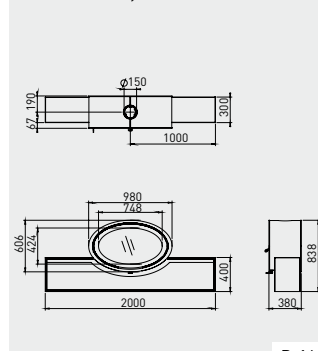

P. 16

**Oval Front, Wall**




P. 16




Oval Tunnel

Oval Tunnel, Fixed




P. 18

Oval Tunnel, Base




P. 19

Oval Tunnel, Legs



P. 19


Oval Tunnel, Plateau



P. 19


Bora Corner

Bora Corner, Cubes




P. 20

Bora Corner, Fixed




P. 21

Bora Corner, Floating Plateau




P. 22

Bora Corner, Straight Plateau



P. 23

Bora Corner, Wall




P. 23

WOOD AND MULTI-FUEL STOVES


Vidar Triple

Vidar Triple Medium, Store




P. 26

Vidar Triple Medium, Floating Plateau




P. 26

Vidar Triple Medium, Straight Plateau



P. 26

Vidar Triple Medium, Wall



P. 26

# WOOD AND MULTI-FUEL STOVES

**Vidar Triple**

**Vidar Triple Large, Store**

Technical drawings of the Vidar Triple Large, Store stove. The top view shows a circular opening with a diameter of  $\varnothing 180$  and a width of 410. The front view shows a height of 1795, a main body height of 850, a width of 700, and a base width of 800. The side view shows a depth of 226 and a base height of 342.

P. 27

**Vidar Triple Large, Straight Plateau**

Technical drawings of the Vidar Triple Large, Straight Plateau stove. The top view shows a circular opening with a diameter of  $\varnothing 180$ , a width of 750, and a depth of 182. The front view shows a height of 885, a main body height of 350, a width of 800, and a base width of 1500. The side view shows a depth of 450.

P. 27

**Vidar Triple Large, Wall**

Technical drawings of the Vidar Triple Large, Wall stove. The top view shows a circular opening with a diameter of  $\varnothing 180$ , a width of 202, and a depth of 430. The front view shows a height of 1480, a main body height of 535, a width of 700, and a base width of 800. The side view shows a depth of 226 and a base height of 125.

P. 27

**Vidar Triple Small, Store**

Technical drawings of the Vidar Triple Small, Store stove. The top view shows a circular opening with a diameter of  $\varnothing 125$  and a width of 360. The front view shows a height of 850, a main body height of 400, a width of 500, and a base width of 400. The side view shows a depth of 176 and a base height of 342.

P. 28

**Vidar Triple Small, Floating Plateau**

Technical drawings of the Vidar Triple Small, Floating Plateau stove. The top view shows a circular opening with a diameter of  $\varnothing 125$ , a width of 160, and a depth of 140. The front view shows a height of 885, a main body height of 300, a width of 500, and a base width of 1200. The side view shows a depth of 450.

P. 28

**Vidar Triple Small, Straight Plateau**

Technical drawings of the Vidar Triple Small, Straight Plateau stove. The top view shows a circular opening with a diameter of  $\varnothing 125$ , a width of 750, and a depth of 160. The front view shows a height of 885, a main body height of 350, a width of 500, and a base width of 1500. The side view shows a depth of 450.

P. 28

**Vidar Triple Small, Wall**

Technical drawings of the Vidar Triple Small, Wall stove. The top view shows a circular opening with a diameter of  $\varnothing 125$ , a width of 180, and a depth of 360. The front view shows a height of 535, a main body height of 400, a width of 500, and a base width of 400. The side view shows a depth of 176 and a base height of 127.

P. 28

**Kalle**

Technical drawings of the Kalle stove. The top view shows a circular opening with a diameter of  $\varnothing 150$ , a width of 74, and a depth of 125. The front view shows a height of 1000, a main body height of 870, a width of 546, and a base width of 365. The side view shows a depth of 180 and a base height of 200.

P. 30

**Folke**

Technical drawings of the Folke stove. The top view shows a circular opening with a diameter of  $\varnothing 150$ , a width of 144, and a depth of 68. The front view shows a height of 1000, a main body height of 396, a width of 320, and a base width of 476. The side view shows a depth of 898 and a base height of 410.

P. 31

**Modivar 5**

**Modivar 5, Floating Plateau**

Technical drawings of the Modivar 5, Floating Plateau stove. The top view shows a circular opening with a diameter of  $\varnothing 125$ , a width of 175, and a depth of 75. The front view shows a height of 887, a main body height of 300, a width of 450, and a base width of 1200. The side view shows a depth of 450.

P. 32

**Modivar 5, Straight Plateau**

Technical drawings of the Modivar 5, Straight Plateau stove. The top view shows a circular opening with a diameter of  $\varnothing 125$ , a width of 750, and a depth of 75. The front view shows a height of 907, a main body height of 350, a width of 450, and a base width of 1500. The side view shows a depth of 450.

P. 32

**Modivar 5, Store Front**

Technical drawings of the Modivar 5, Store Front stove. The top view shows a circular opening with a diameter of  $\varnothing 125$  and a width of 140. The front view shows a height of 1000, a main body height of 355, a width of 310, and a base width of 450. The side view shows a depth of 368 and a base height of 453.

P. 32


**Modivar 5, Store Corner**

Technical drawings of the Modivar 5, Store Corner stove. The top view shows a circular opening with a diameter of  $\varnothing 125$  and a width of 140. The front view shows a height of 1000, a main body height of 355, a width of 310, and a base width of 450. The side view shows a depth of 368 and a base height of 65.

P. 33

Soren 5


Soren 5



P. 34

Aste 5


Aste 5



P. 34

Lars 1000


Lars 1000



P. 35


Ivar 5

Ivar 5, Low




P. 37

Ivar 5, High



P. 38


Ivar 5, Store



P. 39


Ivar 8

Ivar 8, Low



P. 40


Ivar 8, Store



P. 41


Jannik

Jannik Medium, Low




P. 42

Jannik Medium, High



P. 42

Jannik Large



P. 43



# INSERT-/BUILT-IN FIRES INSTYLE/PROSTYLE

**Instyle Front**

**Instyle 500**  
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 500 fire insert. The front view shows a width of 520mm and a height of 350mm. The side view shows a depth of 480mm. The drawing includes various mounting and clearance dimensions.

P. 48

**Instyle 550**  
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 550 fire insert. The front view shows a width of 527mm and a height of 350mm. The side view shows a depth of 560mm.

P. 48

**Instyle 600**  
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 600 fire insert. The front view shows a width of 600mm and a height of 360mm. The side view shows a depth of 480mm.

P. 48

**Instyle 650**  
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 650 fire insert. The front view shows a width of 650mm and a height of 380mm. The side view shows a depth of 495mm.

P. 48

**Instyle Front**

**Instyle 700**  
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 700 fire insert. The front view shows a width of 700mm and a height of 400mm. The side view shows a depth of 600mm.

P. 48

**Instyle 800**  
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 800 fire insert. The front view shows a width of 800mm and a height of 400mm. The side view shows a depth of 980mm.

P. 48

**Instyle 1000**  
+ Classic Line kader 4S

Technical drawing showing front and side views of the Instyle 1000 fire insert. The front view shows a width of 1000mm and a height of 400mm. The side view shows a depth of 980mm.

P. 48

**Prostyle Front**

**Prostyle 500**  
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 500 fire insert. The front view shows a width of 520mm and a height of 344mm. The side view shows a depth of 480mm.

P. 50

**Prostyle 550**  
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 550 fire insert. The front view shows a width of 527mm and a height of 344mm. The side view shows a depth of 560mm.

P. 50

**Prostyle 600**  
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 600 fire insert. The front view shows a width of 600mm and a height of 354mm. The side view shows a depth of 480mm.

P. 50

**Prostyle 650**  
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 650 fire insert. The front view shows a width of 650mm and a height of 371mm. The side view shows a depth of 495mm.

P. 50

**Prostyle 700**  
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 700 fire insert. The front view shows a width of 700mm and a height of 394mm. The side view shows a depth of 600mm.

P. 50

**Prostyle 800**  
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 800 fire insert. The front view shows a width of 800mm and a height of 394mm. The side view shows a depth of 980mm.

P. 50


**Prostyle 1000**  
+ Modern Line kader

Technical drawing showing front and side views of the Prostyle 1000 fire insert. The front view shows a width of 1000mm and a height of 394mm. The side view shows a depth of 980mm.

P. 50


Instyle (ventilator)

**Instyle 600V Next**  
+ Classic Line kader 4S




P. 52

**Instyle 700V Next**  
+ Classic Line kader 4S



P. 52


**Instyle 800V Next**  
+ Classic Line kader 4S



P. 52

Instyle Tunnel


**Instyle Tunnel 700**  
+ Classic Line kader 4S



P. 54

Prostyle Tunnel


**Prostyle Tunnel 700**  
+ Slim Line kader



P. 54


Instyle Corner Slim

**Instyle Corner Slim 660/495**



P. 56


**Instyle Corner Slim 660/570**



P. 56


Instyle Corner

**Instyle Corner 660 Low**



P. 58


**Instyle Corner 660 High**



P. 58

Instyle Triple

**Instyle Triple 660 Low**




P. 59

**CV HAARDEN**






Ivar 10 H20

**Ivar 10 H20, Store**










P. 62

# Technical specifications

Page	Wood burning fireplaces and stoves																		
		Net output (kW)	Efficiency (%)	Energy efficiency class	Flue upper (ø, mm)	Flue rear (ø, mm)	External air connection (EA)	External air connection (RS)	Maximum log length (cm)	Weight (kg)	Interior vermiculite natural	Interior vermiculite dark anthracite	Infrared glass (IR)	DG Smart Assist (app control)	Type: wall	Type: freestanding	Type: free hanging	Type: insert	Type: built-in
<b>Design fires</b>																			
<b>Front fires</b>																			
12	Odin Front, Fixed	4,0 - 8,0	75,2	A	150	-	optional	-	33	85	-	+	-	-	-	-	+	-	-
12	Odin Front, Base	4,0 - 8,0	75,2	A	150	-	optional	-	33	100	-	+	-	-	-	+	-	-	-
12	Odin Front, Wall	4,0 - 8,0	75,2	A	150	-	optional	-	33	85	-	+	-	-	+	-	-	-	-
13	Odin Front, Plateau	4,0 - 8,0	75,2	A	150	-	optional	-	33	125	-	+	-	-	-	+	-	-	-
16	Oval Front, Fixed	6,0 - 10,0	75,9	A	150	-	optional	including	50	120	-	+	-	-	-	-	+	-	-
16	Oval Front, Base	6,0 - 10,0	75,9	A	150	-	optional	including	50	135	-	+	-	-	-	+	-	-	-
16	Oval Front, Plateau	6,0 - 10,0	75,9	A	150	-	optional	including	50	160	-	+	-	-	-	+	-	-	-
16	Oval Front, Wall	6,0 - 10,0	75,9	A	150	-	optional	including	50	120	-	+	-	-	+	-	-	-	-
17	Oval Front, Legs	6,0 - 10,0	75,9	A	150	-	optional	including	50	130	-	+	-	-	-	+	-	-	-
<b>Tunnel fires</b>																			
14	Odin Tunnel, Fixed	6,0 - 10,0	75,0	A	150	-	optional	-	33	85	-	+	-	-	-	-	+	-	-
15	Odin Tunnel, Base	6,0 - 10,0	75,0	A	150	-	optional	-	33	130	-	+	-	-	-	+	-	-	-
15	Odin Tunnel, Plateau	6,0 - 10,0	75,0	A	150	-	optional	-	33	125	-	+	-	-	-	+	-	-	-
18	Oval Tunnel, Fixed	9,0 - 12,0	81,5	A+	150	-	optional	including	50	120	-	+	+	-	-	-	+	-	-
19	Oval Tunnel, Base	9,0 - 12,0	81,5	A+	150	-	optional	including	50	135	-	+	+	-	-	+	-	-	-
19	Oval Tunnel, Legs	9,0 - 12,0	81,5	A+	150	-	optional	including	50	130	-	+	+	-	-	+	-	-	-
19	Oval Tunnel, Plateau	9,0 - 12,0	81,5	A+	150	-	optional	including	50	160	-	+	+	-	-	+	-	-	-
<b>2-sided fires</b>																			
20	Bora Corner, Cubes	4,0 - 9,0	78,1	A	150	-	optional	including	36	145	-	+	+	-	-	+	-	-	-
21	Bora Corner, Fixed	4,0 - 9,0	78,1	A	150	-	optional	including	36	95	-	+	+	-	-	-	+	-	-
21	Bora Corner, Floating Plateau	4,0 - 9,0	78,1	A	150	-	optional	including	36	145	-	+	+	-	-	+	-	-	-
22	Bora Corner, Straight Plateau	4,0 - 9,0	78,1	A	150	-	optional	including	36	140	-	+	+	-	-	+	-	-	-
23	Bora Corner, Wall	4,0 - 9,0	78,1	A	150	-	optional	including	36	95	-	+	+	-	+	-	-	-	-
<b>Wood and multi-fuel stoves</b>																			
<b>3-sided fires</b>																			
26	Vidar Triple Medium, Store	4,0 - 9,0	76,3	A	150	-	optional	including	50	130	+	-	+	+	-	+	-	-	-
26	Vidar Triple Medium, Floating Plateau	4,0 - 9,0	76,3	A	150	-	optional	including	50	170	+	-	+	+	-	+	-	-	-
26	Vidar Triple Medium, Straight Plateau	4,0 - 9,0	76,3	A	150	-	optional	including	50	165	+	-	+	+	-	+	-	-	-
26	Vidar Triple Medium, Wall	4,0 - 9,0	76,3	A	150	-	optional	including	50	123	+	-	+	+	+	-	-	-	-
28	Vidar Triple Large, Store	6,0 - 10,0	79,0	A	180	-	optional	including	50	137	+	-	+	+	-	+	-	-	-
28	Vidar Triple Large, Straight Plateau	6,0 - 10,0	79,0	A	180	-	optional	including	50	173	+	-	+	+	-	+	-	-	-
28	Vidar Triple Large, Wall	6,0 - 10,0	79,0	A	180	-	optional	including	50	131	+	-	+	+	+	-	-	-	-
29	Vidar Triple Small, Store	4,0 - 7,0	79,0	A	125/130	-	optional	including	35	102	+	-	+	+	-	+	-	-	-
29	Vidar Triple Small, Floating Plateau	4,0 - 7,0	79,0	A	125/130	-	optional	including	35	147	+	-	+	+	-	+	-	-	-
29	Vidar Triple Small, Straight Plateau	4,0 - 7,0	79,0	A	125/130	-	optional	including	35	142	+	-	+	+	-	+	-	-	-
29	Vidar Triple Small, Wall	4,0 - 7,0	79,0	A	125/130	-	optional	including	35	100	+	-	+	+	+	-	-	-	-
30	Kalle	4,0 - 8,0	85,0	A+	150	150	including	-	40	80	+	-	-	-	-	+	-	-	-
31	Folke	4,0 - 8,0	77,3	A	150	150	optional	including	33	80	+	-	+	+	-	+	-	-	-
<b>Front fires</b>																			
32	Modivar 5, Floating Plateau	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	140	+	-	-	-	-	+	-	-	-
32	Modivar 5, Straight Plateau	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	135	+	-	-	-	-	+	-	-	-
32	Modivar 5, Store Front	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	120	+	-	-	-	-	+	-	-	-
33	Modivar 5, Store Corner	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	120	+	-	-	-	-	+	-	-	-
34	Soren 5	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	85	+	-	-	-	-	+	-	-	-
34	Aste 5	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	85	+	-	-	-	-	+	-	-	-
35	Lars 1000	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	100	+	-	-	-	-	+	-	-	-



Page	Wood burning fireplaces and stoves	 Net output (kW)	 Efficiency (%)	 Energy efficiency class	Flue upper (ø, mm)	Flue rear (ø, mm)	 External air connection (EA)	 External air connection (RS)	Maximum log length (cm)	Weight (kg)	Interior vermiculite natural	Interior vermiculite dark anthracite	 Infrared glass (IR)	 DG Smart Assist (app control)	Type: wall	Type: freestanding	Type: free hanging	Type: insert	Type: built-in
<b>Wood and multi-fuel stoves</b>																			
<b>Front fires</b>																			
37	Ivar 5, Low	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	85	+	-	-	-	+	-	-	-	-
38	Ivar 5, High	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	90	+	-	-	-	+	-	-	-	-
39	Ivar 5, Store	4,9 - 7,0	82,0	A+	125/130	125/130	optional	including	35	105	+	-	-	-	+	-	-	-	-
40	Ivar 8, Low	5,0 - 10,0	76,6	A	150	150	optional	including	46	100	+	-	-	-	+	-	-	-	-
41	Ivar 8, Store	5,0 - 10,0	76,6	A	150	150	optional	including	46	120	+	-	-	-	+	-	-	-	-
42	Jannik Medium, Low	4,9 - 7,0	82,0	A+	125/130	125/130	optional	-	35	90	+	-	-	-	+	-	-	-	-
42	Jannik Medium, High	4,9 - 7,0	82,0	A+	125/130	125/130	optional	-	35	90	+	-	-	-	+	-	-	-	-
43	Jannik Large	4,0 - 8,0	81,5	A+	130&150	130&150	optional	-	40	128	+	-	-	-	+	-	-	-	-
<b>Inserts and built-in wood fires</b>																			
<b>Front fires</b>																			
48	Instyle 500	3,0 - 7,0	82,0	A+	150	-	optional	-	35	80	+	-	-	-	-	-	-	+	+
48	Instyle 550	3,0 - 7,0	81,0	A+	150	-	optional	-	36	94	+	-	-	-	-	-	-	+	+
48	Instyle 600	3,0 - 7,0	79,6	A	150	-	optional	-	42	120	+	-	-	-	-	-	-	+	+
48	Instyle 650	3,0 - 9,0	80,5	A	150	-	optional	-	40	108	+	-	-	-	-	-	-	+	+
48	Instyle 700	6,0 - 12,0	81,6	A+	180	-	optional	-	45	116	+	-	-	-	-	-	-	+	+
48	Instyle 800	8,0 - 12,0	76,6	A	180	-	optional	-	55	130	+	-	-	-	-	-	-	+	+
48	Instyle 1000	9,0 - 13,0	77,7	A	180	-	optional	-	75	145	+	-	-	-	-	-	-	+	+
50	Prostyle 500	3,0 - 7,0	82,0	A+	150	-	optional	-	35	80	+	-	-	-	-	-	-	+	+
50	Prostyle 550	3,0 - 7,0	81,0	A+	150	-	optional	-	36	94	+	-	-	-	-	-	-	+	+
50	Prostyle 600	3,0 - 7,0	79,6	A	150	-	optional	-	42	120	+	-	-	-	-	-	-	+	+
50	Prostyle 650	3,0 - 9,0	80,5	A	150	-	optional	-	40	108	+	-	-	-	-	-	-	+	+
50	Prostyle 700	6,0 - 12,0	81,6	A+	180	-	optional	-	45	116	+	-	-	-	-	-	-	+	+
50	Prostyle 800	8,0 - 12,0	76,6	A	180	-	optional	-	55	130	+	-	-	-	-	-	-	+	+
50	Prostyle 1000	9,0 - 13,0	77,7	A	180	-	optional	-	75	145	+	-	-	-	-	-	-	+	+
<b>Front fires, with ventilating fan</b>																			
52	Instyle 600V Next	3,0 - 7,0	79,6	A	150	-	optional	-	42	98	+	-	-	-	-	-	-	+	-
52	Instyle 700V Next	6,0 - 12,0	81,6	A+	180	-	optional	-	45	120	+	-	-	-	-	-	-	+	-
52	Instyle 800V Next	8,0 - 12,0	76,6	A	180	-	optional	-	55	130	+	-	-	-	-	-	-	+	-
<b>Tunnel fires</b>																			
54	Instyle Tunnel 700	9,0 - 12,0	83,0	A+	180	-	optional	including	52	140	+	-	-	-	-	-	-	+	+
54	Prostyle Tunnel 700	9,0 - 12,0	83,0	A+	180	-	optional	-	52	140	+	-	-	-	-	-	-	+	+
<b>2-Sided fires</b>																			
56	Instyle Corner Slim 660/495	4,0 - 10,0	75,2	A	150 <sup>1)</sup>	-	optional	including	50	110	+	-	-	-	-	-	-	+	+
56	Instyle Corner Slim 660/570	5,0 - 10,0	80,0	A	180	-	optional	including	50	120	+	-	+	-	-	-	-	+	+
58	Instyle Corner 660 Low	4,0 - 9,0	76,3	A	150	-	including	-	50	105	+	-	-	-	-	-	-	+	+
58	Instyle Corner 660 High	4,0 - 9,0	76,3	A	150	-	including	-	50	105	+	-	-	-	-	-	-	+	+
<b>3-Sided fires</b>																			
59	Instyle Triple 660 Low	4,0 - 9,0	76,3	A	150	-	optional	including	50	100	+	-	+	-	-	-	-	+	+
<b>Central heating fires</b>																			
62	Ivar 10 H20, Store	8,0 - 12,0	81,5	A+	150	-	optional	including	50	225	+	-	+	-	-	+	-	-	-

<sup>1)</sup> Multi-fuel kit available for burning multi-fuel/coal.

<sup>2)</sup> SlideConnect® = variable connection to the flue (can be shifted to 4 cm).

<sup>3)</sup> Defra approved = approved to use in smoke controlled areas.



Dealer

**Dik Geurts**  
*Creation of flames*

DRU Verwarming B.V.  
P.O. Box 1021, 6920 BA Duiven  
Ratio 8, 6921 RW Duiven  
**The Netherlands**

T. +31 (0)26 - 319 5 319  
www.dikgeurts.nl

Drugasar Ltd.  
Deans Road, Swinton  
Manchester, M27 0JH  
**United Kingdom**

T. +44 (0)161 - 793 8700  
www.dikgeurts.co.uk

DRU Belgium  
Kontichsesteenweg 69/1  
2630 Aartselaar  
**Belgium**

T. +32 (0)3 - 450 7000  
www.dikgeurts.be

since  
**1754**



BY APPOINTMENT OF  
THE COURT OF THE NETHERLANDS



Dik Geurts is a trademark of DRU Verwarming B.V. Subject to changes. The colours in this brochure may vary from the actual products. Nothing in this publication may be used without prior written consent from DRU Verwarming B.V.



Art.993476 | 2024-11

SOCIAL MEDIA: For more inspiration and information, visit one of our social media channels or scan the QR code:

