



Built-in wood fires and inserts
2025







Welcome to Spartherm


Spartherm is the European market leader for built-in wood burning fires and freestanding wood stoves.

The wood fires and inserts in this brochure represent the very best in German fireplace design and technology.

Divided into three distinct product groups, Premium, Linear and Swing, they provide every option in terms of style, orientation, versatility, capacity and energy efficiency.

Spartherm works closely with DRU, a company with a rich history in fireplace creation and distribution. The international DRU network of specialist fireplace dealers gives you access to the highest standards of design, installation and customer service.

It all adds up to a partnership forged in excellence!



Scan the QR code and watch the DRU corporate video

Getting fired up about design and quality

Spartherm has been creating immaculate wood fires and stoves for over 40 years. They are expertly designed, carefully crafted and beautifully finished, right down to the smallest detail.

We create wood fires that warm the heart as well as the home, generating fascinating flames and combining style, form and function to full effect.

Made in Germany, made to last a lifetime, made by Spartherm.



Contents

The world of Spartherm wood fires

How to choose your ideal wood fire	p. 06
Controlling the fire with your smartphone or tablet	p. 08
Natural interior claddings for top performance	p. 10
Door options, openings and controls	p. 11
Glass options, cleaning and ventilation	p. 14
Elevating door functions and 'Soft-close' door system	p. 16
Combustion system and energy efficiency classifications	p. 18
Frames for the perfect finish	p. 20
Useful accessories (Sesam, S-Thermatik NEO, S-USI II)	p. 22

The Spartherm wood fires range

Built-in fires

	Premium series, elevating door with concealed handle		Lean series, elevating door with concealed handle		Linear series elevating door with integral handle
• 3-sided fires	p. 26	• 3-sided fires	p. 30	• 3-sided fires	p. 32
• 2-sided fires	p. 38	• 2-sided fires	p. 40	• 2-sided fires	p. 42
• Front fires	p. 50			• Front fires	p. 52
• Tunnel fires	p. 62			• Tunnel fires	p. 64

Inserts

	Swing series, hinged door with integral handle
• Front fires	p. 68

Technical Specifications

Line drawings	p. 70
Technical specifications	p. 78



How to choose your ideal wood fire

Functional considerations: heat output, energy efficiency and usability

Before you choose the model, there is an easy way for you to calculate the capacity of the fire that you need to heat your home. Your local dealer can help you with this.

Clean burning and high efficiency

Modern wood fires have average energy efficiencies of 80%; once they reach their maximum temperature, they will burn cleanly and efficiently.

The latest closed combustion wood fires release around 15 times less CO₂ than old, open fires. And the difference is even greater when it comes to fine particles; an open fire emits around 50 times more fine particles than a modern, closed combustion fire. Only use wood with a maximum moisture content of 20%.

The heat output of a wood fire

Whilst the heat output of your wood fire must be enough for the size of your room, size is not the only consideration.

Firstly, you must decide what you want from your wood fire. Is it

just something nice to look at that you will use occasionally?

Or will it fulfil an important role in heating your home? If heating is the main priority, then you need a fire with the optimum heat output for your home.

If, however, the output is too high, the room will become uncomfortable. You will then be unable to let the fire burn at full capacity, leading to inefficient combustion.

The quantity of logs in the wood fire determines its output. One kilo of wood delivers approx. 4 kW capacity. A large fire with only a few logs is not burning efficiently; that is why it's better to opt for a smaller fire with plenty of logs


If the output is too low, it may not provide sufficient heat for your room, so be sure to spend time finding a fire with the correct output for your home.

How can you calculate the heat output?

The graph below shows the stages that are followed to determine the correct heat output:

Your home is:

- A** - well insulated with full double-glazing, wall, floor and roof insulation
- B** - reasonably well insulated with partial double-glazing, wall, floor and roof insulation
- C** - poorly insulated - no double-glazing, wall, floor or roof insulation

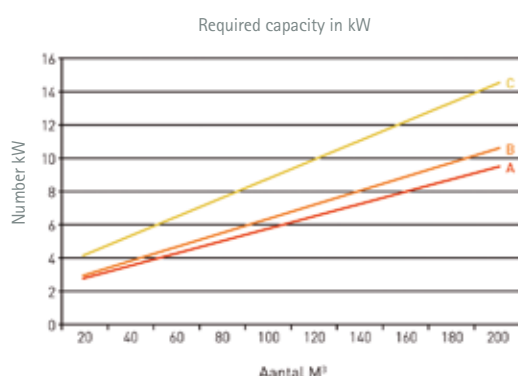

Fires with supplementary central heating

If you want a fire that heats the whole house, not just the living room, you should opt for a Spartherm CH (central heating) wood fire with the S-Thermatik NEO electronic control system.. Under this system, 70% of the output is used to heat radiators and domestic hot water, with just 30% directly heating the room.

The unique benefits of Spartherm CH wood fires:

- Efficient distribution of energy
- Enjoy the warmth and comfort of the fire with lower energy consumption
- Enjoy rapid heating of your domestic hot water with efficient use of energy
- Take advantage of fires with optional infrared coated, double-glazed glass, which restrict heat to the living room and release more heat to the central heating system.



Read more about S-Thermatik NEO on page 8.




Heat your whole house with a CH fire
(H₂O fires from Spartherm)

What are the heating needs of a typical family? The parents sit by the fire, the son is taking a shower and the daughter is studying in her bedroom.

Spartherm CH wood fires cleverly link these various heating requirements. The supplementary heat from the fire is used to heat the rest of the house and the domestic hot water.

A Spartherm CH wood fire is connected to an existing central heating system, with a large part of the output being used to heat the entire home. Alternatively, you could store hot water in a buffer tank. In this way, the water is retained for later use, known as 'heat on demand'.

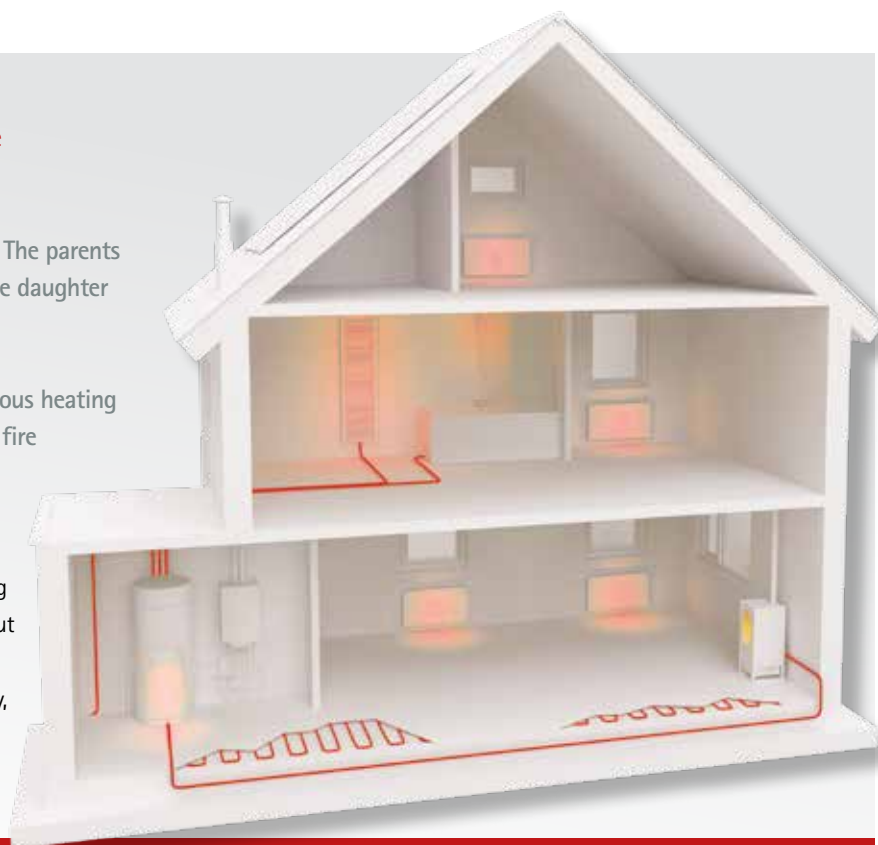

Spartherm central heating wood fires are supplied under the DRU Green Design label. These are innovative home heating appliances which provide an assurance of a high quality and high energy efficiency, giving you heating that is fit for the 21st century.

Control the fire with your smartphone or tablet



The S-Thermatik NEO app, for automatic ignition and smart remote control

S-Thermatik NEO is an innovative, electronic fire control system that has been specially developed for all Spartherm Premium, Lean and Linear series wood fires. Lighting and controlling your fire couldn't be easier, with this intelligent operating system!

The fires can be controlled using the app's graphic touchscreen, or you can still control it manually if you prefer.

Benefits of the S-Thermatik NEO control system:

- Displays how much wood has been used and when you need to top it up
- Visual and audible warning when top-up is required
- Automatically switches the air control to a safe setting in the event of a power cut
- Direct connection to the NEO controls, no distribution unit required
- Simple installation, very little space required
- Connection options to the Spartherm Sesam system for automatic opening of elevating door (see page 22)
- Bluetooth connection to smartphones and tablets via free app





Enjoy video previews of our wood fires!

To experience our wood fires on live display, simply scan the pages in this brochure that have a QR code. Our special QR code reader is free to download and can be used on all tablets (iPad and Android) and smartphones (iPhone and Android).



Natural interior claddings for top performance

Chamotte

Spartherm wood fires have Chamotte brick interior claddings. This is a superior quality, natural fireproof brick that ensures high efficiency and clean burning. Chamotte bricks also provide even heat distribution.




The benefits of Chamotte interiors, black or white:

- Hardwearing material that keeps its colour
- Even heat distribution due to high density
- Guaranteed high efficiency rate and clean burning, superior to steel plates
- Resistant to condensation or damage from hard surfaces
- Extremely heat resistant



The benefits of black Chamotte:

- Sleek, contemporary appearance
- Sets off flames beautifully against darker background
- Renders soot and brush marks invisible

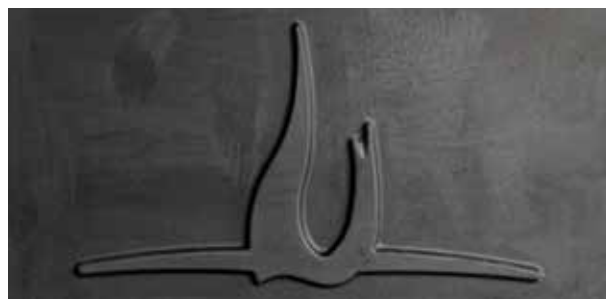

Ash grill

Spartherm wood fires have a recessed fuel bed with a cast iron ash grill. This grill can easily be removed to reveal the ash tray. For a fire that is as efficient as possible, you are advised to leave a small layer of ash on the fuel bed, although it is important to remove excess ash regularly. The ash tray must also be emptied at regular intervals.



Smart door technology and a design that suits you

You have the choice of fireplaces of the series:

Built-in wood fires, elevating door

- Premium (concealed handle)
- Lean (concealed handle)
- Linear (integral handle)

Insert wood fires, hinged door

- Swing (integral handle)



Premium



Lean



Linear



Swing




Premium series

elevating door with concealed handle

Premium fireplaces have a tight recessed door handle. This concealed door handle makes no contact with the glass and therefore remains cold.

Premium with full view of the fire (strikingly beautiful with 2 and 3-sided fireplaces)

- Interior in black or white chamotte
- Bottom glass frameless
- Equipped with unprinted glass
- Handle integrated in the built-in frame

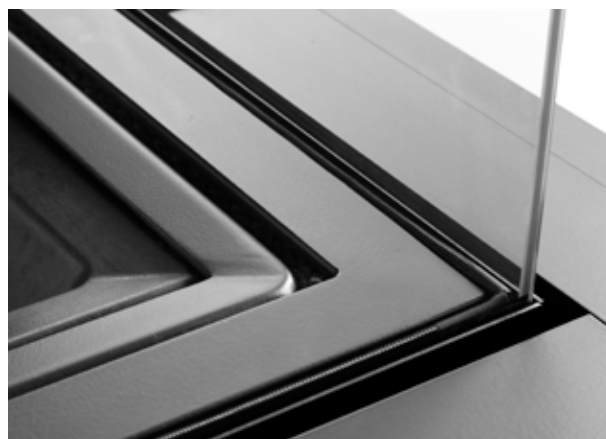

Sleekly lined elevating door fireplace with recessed fuel bed



Lean series

elevating door with concealed handle

Lean fireplaces have a recessed handle built into the frame. The door profile is invisible. For cleaning, the front frame can be tilted.

Lean has a large combustion chamber and minimal space requirements (installation directly against the wall).

- Interior in black or white chamotte
- Bottom glass frameless
- Equipped with unprinted (multiple IR-coated) glass
- Handle integrated in the built-in frame



Very low installation depth



Linear series

elevating door with integral handle

Linear series fires have doors with smoothly working, integral handles in a stainless steel or black finish that can be opened with ease.

Linear series features

- Black or white chamotte interior
- Handle integral to lower frame
- 4-sided, ceramic screen-printed glass
- Handle in stainless steel (standard) or black (optional)



Optional black handle (powder coated)





Premium series: elevating door with concealed handle



Lean series: elevating door with concealed handle



Linear series: elevating door with integral handle

Cleaning, ventilation and glass options



Drop down/hinged doors (elevating door fires)

Spartherm wood fire doors provide great flexibility of function. They can slide vertically, tilt outwards or swing away from the fire, depending on the model you choose and whether you are cleaning the interior, replenishing the logs or polishing the glass. Front and tunnel view models have tilt and slide mechanisms, whilst 2 and 3-sided Linear models slide vertically and swing open at the side.



Premium drop down door



Handle to release the door



Door can be tilted outwards

Air supply

For optimal combustion, it is important that the supply of air is well controllable.

Types of air control:

Air lever

The handle is easily accessible and stylishly placed. It ensures infinitely variable and controlled dosing of supply air.

Air slide

With the supplied removable handle you can easily control the air supply yourself.



Single or double glazing

Spartherm wood fires are assembled using high quality, heat-resistant glass. They are supplied with single glazing as standard, whilst front and tunnel view models can be fitted with optional double glazing for added insulation and about 30% lower radiant heat.

Infrared glass (IR)



For a number of our fires we use infrared glass to circulate the heat in the fire box. This gives a higher efficiency, retains the heat in the fire and as a result the glass stays clean much longer

Elevating door mechanism

Elevating glass doors are one of the hallmarks of Spartherm wood fires. A sophisticated double pulley system with steel cables and carefully balanced counterweights ensures that the doors slide smoothly and effortlessly for easy access to the interiors of the fires.



Soft close door system

Spartherm has developed a patented soft close glass door system. As well as being easy to operate it ensures that, when closed, the fire is completely airtight. This prevents any gases from escaping into the living space and guarantees that they are expelled through the flue.





Fireplaces with convection chamber

Most Spartherm wood fires can be fitted with a convection chamber – an additional external compartment that encloses the fire and stores supplementary heat. Specially designed hoses can be connected to the top of the convection chamber in order to pipe warm air to other rooms around the home.

This unique function offers great flexibility in terms of the fire's installation, its efficiency and the contribution it can make to your home's energy rating.

Combustion systems

Wood fires have two classifications: open or closed combustion.



Open combustion 'RLA'

Wood fires with an open combustion system draw air for combustion from inside the building.

This type of fire should only be installed in homes with adequate ventilation.

These fires are optionally available with an external air connection to get extra air from outside.



Closed combustion 'RLU'

Wood fires with closed combustion systems are designed for well-insulated, mechanically ventilated and passive homes. The fire draws air from outside the building for combustion, with no depletion of air from inside the home.

The technical specifications at the back of this brochure indicate which Spartherm wood fires are available with open or closed combustion systems.



Optional: external air connection

The option of an external air connection kit enables the installer to convert an open combustion wood fire to an external air source.

This involves the connection of a flexible hose to the base of the fire using a special adaptor. The hose can be routed through a chimney, wall cavity or crawl space to connect to the outside air, resulting in improved performance and energy efficiency.


The technical specifications page in this brochure shows which fires have this as standard and which have it as an option.

What is an energy label?

All Spartherm wood fires have an energy label, indicating the energy consumption of each model, which is important information for the consumer.

The energy efficiency class is determined by the ratio of wood that a fire uses in relation to the heat that it generates. The greener the energy classification, the more energy efficient the fire.

Spartherm wood fires meet the strictest criteria so always have green energy labels.

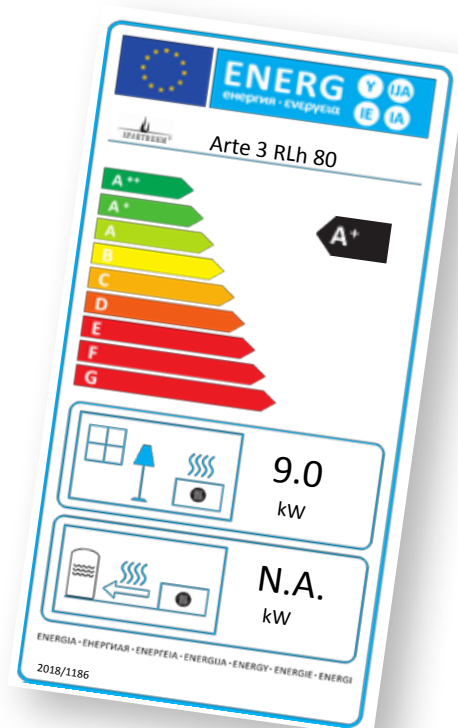

Several wood fires are Defra approved
for UK smokeless controlled areas



Spartherm wood fires: ready for the future!

Do you want a wood fire that will meet all emissions and energy efficiency regulations both now and in the future? Then Spartherm is the right choice. All our wood fires fulfil the European EcoDesign emissions directive that came into force in 2022. 'EcoDesign 2022' wood fires guarantee high efficiency, very low emissions of fine particles and long-term enjoyment of your fire.

More reasons to buy a new wood-burning fireplace

Important for the right choice of a wood fire is the idea that you can now burn with much less emissions hazardous substances. That makes the warm coziness of a wood-burning fireplace is a lot more enjoyable. A few more reasons to consider a new Spartherm wood fire:

- A higher efficiency: the result is more heat and a low emissions of harmful substances
- Lower heating costs: a clever construction of the fireplace provides a high combustion temperature and less consumption of wood
- Automated firing: control and display of the combustion progress via smartphone/tablet or via a display, intelligent control of supply air and signaling of refill moments



SCAN THIS QR CODE
FOR MORE INFORMATION



Frames to provide the perfect finish

Standard frames (solid or with sloped sides)

Spartherm built-in wood fires can be installed in several ways.


There are two types of frame:

Solid frames,

available in the Linear series

(standard on the Premium and Lean series):


- For a sleek and robust design
- Material thickness 6 mm
- Only available in combination with the fire

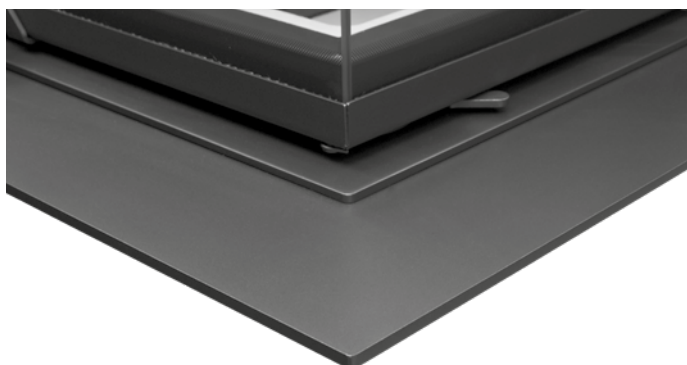

Frames with sloped sides,

available in the Linear series (integral handle):

- Contemporary styling
- Material thickness 3 mm
- Only available in combination with the fire

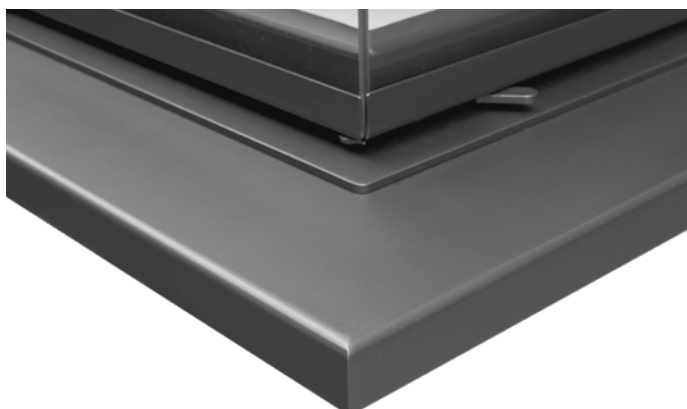

Customised (solid) frames

To personalise your fire you can choose (for a small surcharge) a customised frame.


Customised frames,

available in the Linear series:


- Material thickness 6 mm
- In any desired width
- Small surcharge

Frames 4, 6 or 8-sided or frames with open-sided base


Standard frames for Spartherm wood fires are 4-sided, 6-sided or 8-sided. However, if the glass door is to be recessed into a hearth or floor, then you should select a frame with no base. See below for an overview of the possible frames for the various models (fires shown are for illustration purposes only, without convection chamber).

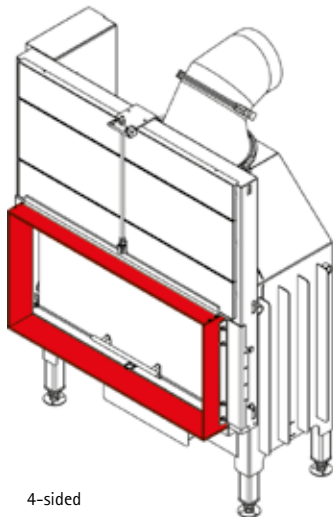


4-sided

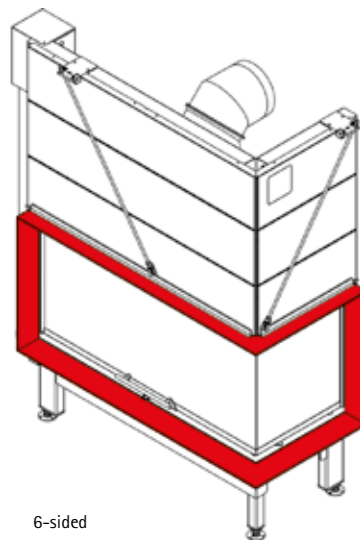


6-sided

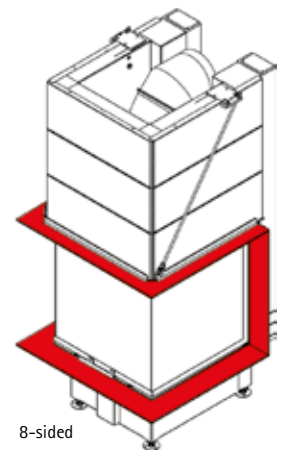


8-sided

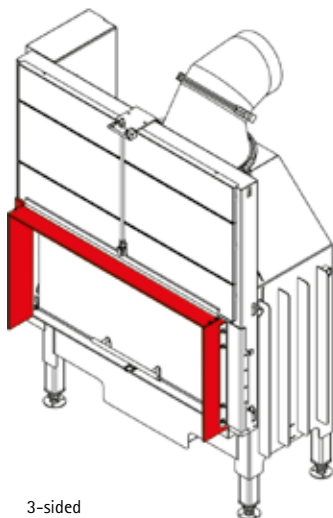

3-sided

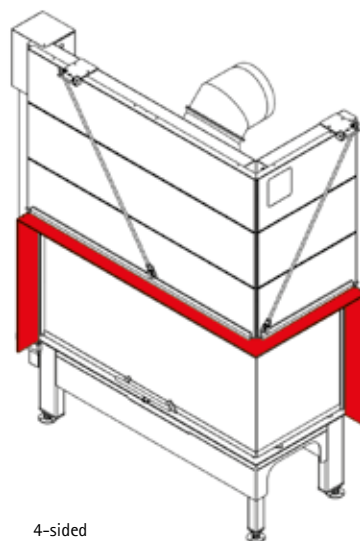

4-sided

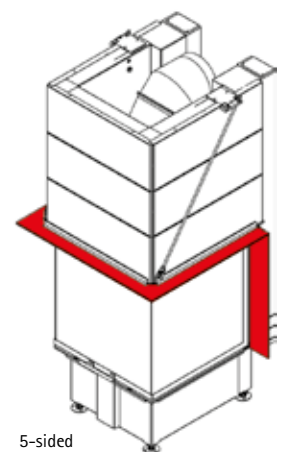

5-sided

For extra ease-of-use



Sesam, electronic elevating door system

Elevating doors for built-in wood fires can be opened and closed in multiple ways. Here are the following options:

Manual:

- Premium and Lean series: concealed handle
- Linear series: integral handle on the door frame

Automatic:

- With the optional Sesam remote control for automatically opening and closing the elevating door (all elevating door fires)



S-Thermatik NEO, smart control app

Spartherm wood fires with elevating doors can be fitted with this system, which allows you to remotely control the fire using an app. This gives you greater control over the fire, resulting in clean burning and high efficiency. See the benefits on page 8 of this brochure.



Lux ventilation units

The use of the fire leads to heat accumulating in the cavity that surrounds the fire assembly. This area must be ventilated to ensure it doesn't crack. You can choose from the following ventilation units:

- Lux Basic, classic design, with adjustable, closing slats (white)
- Lux Lignum, modern look, with option of built-in atmospheric lighting (ivory white)

Both units can be connected to convection hoses by means of an adaptor.



S-USI II, monitoring chimney pressure

When a ventilation system and a fireplace are used simultaneously, continuous monitoring of the air pressure situation is important. Safety system S-USI II monitors and regulates the negative pressure in the chimney and in the installation room. It ensures that no flue gases enter the living area.



Read all about S-USI II



Lux Basic



Lux Lignum





H₂O/CH wood fires
(p.07)

Selected fires with central heating connections.



S-Thermatik NEO
app control (p.08)

Automatic fire control using an app or wall mounted screen.



Door type Premium
elevating door (p.11)

Concealed handle, print-free glass.



Door type Lean
elevating door (p.11)

Concealed handle, print-free glass.



Door type Linear
elevating door (p.11)

Integral handle, screen-printed glass on 4 sides.



Drop down/hinged door (p.14)
(fires with elevating door)

Unique drop down or hinged opening door for easy access to the interior of the fire.



IR: infrared glass
(p.15)

For a higher efficiency and cleaner glass.



Elevating door
(p.16)

Soft close door system for ease of use and airtight finish.



Open and closed combustion (p.18)

Choose a fire with open (RLA) or closed (RLU) combustion.



External air connection kit (p.18)

To create additional ventilation for open combustion fires.



Frames
(p.20)

Choose your ideal frame for the perfect built-in.



Sesam remote-control (p.22)

Elevating door for electronic opening and closing.



S-USI II control
negative pressure (p.22)

Chimney pressure monitoring and air pressure situation monitoring.



The Spartherm range

Built-in and insert wood fires

Spartherm wood fires offer great flexibility of installation, whether your home has an existing chimney and whatever the size of your living space.

The range is very extensive, including front fires, 2 and 3-sided fires for a view of the flames from various angles and tunnel fires that you can see from 2 rooms.

BUILT-IN WOOD FIRES



3-sided fires
(p.26)



2-sided fires
(p.38)



Front fires
(p.50)



Tunnel fires
(p.62)

INSERT WOOD FIRES



Front fires
(p.68)



PREMIUM Triple

60x38x50



80x41x50



These two and three-sided wood fires are distinguished mainly by their well-balanced glass dimensions. The front glass is almost twice as wide as the side window. This creates a beautiful and full view of the fire.



Premium Triple 80x41x50



SCAN THIS QR CODE
FOR MORE INFORMATION

Benefits:

- Concealed handle provides a full view of the fire
- Smart drop down door for easy cleaning
- Door easy to open at an angle of 30 degrees
- Dark interior provides a modern look
- Equipped with a 6 mm solid frame

Door dimensions (cm)	60x38x50	80x41x50
Output range	7,0-13,0 kW	8,0-14,8 kW
Efficiency	>80% A+	80% A+
Line drawings	P.70	P.70



P.08



P.11



P.14



P.16



P.18



P.18



P.20



P.22



P.22



SCAN THIS QR CODE
FOR MORE INFORMATION





PREMIUM Triple

50x54x50



50x74x50



Split your living room into two parts and enjoy the beautiful wood fire to the fullest. This is possible with these room dividers with a strikingly beautiful glass windows. The front is only 50 cm wide so there is still a lot of living space left.



Premium Triple 50x54x50



SCAN THIS QR CODE
FOR MORE INFORMATION

Benefits:

- Concealed handle provides a full view of the fire.
- Choice of black or white interior
- Ideal as a room divider
- Unobstructed view of the fire without a visible frame
- Door easy to open at an angle of 30 degrees

Door dimensions (cm)	50x54x50	50x74x50
Output range	6,5-12,1 kW	8,0-14,8 kW
Efficiency	>80% A+	>80% A+
Line drawings	P.70	P.70



P.08



P.11



P.14



P.16



P.18



P.18



P.20



P.22



P.22





SCAN THIS QR CODE
FOR MORE INFORMATION





LEAN Triple

68x28x48



The Lean Triple 68x28x48 built-in fire will impress you with its consistent design focused on minimising the unit depth. This compact model is ideal wherever space is limited or less heat is required. U-shaped glasses create an impressive fire panorama.



Lean Triple 68x28x48

Benefits:

- Space-saving thanks to low installation depth
- Equipped with unprinted (multiple IR-coated) glass
- Handle integrated in the built-in frame
- Cleaning through tilting front glass
- Handy ashtray for ash collection

Door dimensions (cm) **68x28x48**

Output range 5,3-9,8 kW

Efficiency >80%



Line drawings P.70



P.08



P.11



P.14



P.15



P.16



P.18



P.18



P.22



P.22





SCAN THIS QR CODE
FOR MORE INFORMATION





LINEAR Triple

73x35x40



For homes that have a standard sized chimney or that have a smaller living room, this compact, 3-sided wood fire is the ideal solution. Extra pleasure from your fireplace! Because the fireplace is quite shallow, you have many placement options.



Linear Triple 73x35x40

Benefits:

- Compact model
- 3-sided fire view
- Suitable for well-insulated homes due to modest heat output and external air connection

Door dimensions (cm)	73x35x40
Output range	5,9-10,9 kW
Efficiency	80%
	A+
Line drawings	P.70



P.08



P.11



P.14



P.16



P.18



P.18



P.20



P.22



SCAN THIS QR CODE
FOR MORE INFORMATION





LINEAR Triple

60x38x50

80x41x50

100x45x56



This is a mid-range selection of 3-sided wood fires with generous sizes and lower than average heat outputs. With a maximum width of 1 metre, they are suitable for standard chimney installation and for many other locations around the home, providing glorious 180 degree fire views and ease of operation.



Linear Triple 80x41x50

Benefits:

- 180° fire view
- Suitable for chimney or false chimneybreast installation
- Integral handle for ease of use

Door dimensions (cm)	60x38x50	80x41x50	100x45x56
Output range	7,0-13,0 kW	8,0-14,8 kW	7,7-14,3 kW
Efficiency	>80% A+	80% A+	>78% A
Line drawings	P.71	P.71	P.71



P.08



P.11



P.14



P.16



P.18



P.18



P.22



P.20



P.22

Linear Triple 100x45x56







LINEAR Triple

50x54x50

50x74x50

55x91x54



These remarkable U-shaped wood fires are designed to be used as room dividing appliances and other interior design features. They are available with a selection of matching false chimneybreasts and floating hearths in order to create striking architectural objects, whilst providing outstanding warmth and ambience.



Linear Triple 50x54x50

Benefits:

- Enables clever division of living areas
- Provides outstanding fire views
- Choice of false chimneybreasts and hearths for flexible installation

Door dimensions (cm)	50x54x50	50x74x50	55x91x54
Output range	6,3-11,7 kW	8,0-14,8 kW	9,1-16,9 kW
Efficiency	80% A	>80% A+	>78% A
Line drawings	P.71	P.71	P.71



P.08
50x74x50
only



P.11



P.14



P.16



P.18



P.18



P.20
50x54x50/
55x91x54
only



P.22





PREMIUM Corner

58x39x51



68x40x50



80x40x50



These new built-in fireplaces have a minimalist design where everything is focused on the essence of the fireplace: the fire. No visible frames, just a lot of glass and a lot of fire. The biggest difference between these 2 wood fires is the width of the glass at the front.



Premium Corner 68x40x50 (left)



SCAN THIS QR CODE
FOR MORE INFORMATION

Benefits:

- Concealed handle provides full view of the fire
- Side window optionally left or right
- Choose from a black or white interior
- Unobstructed view of the fire without a visible frame
- Connection possible to a flue with a diameter of only 200 mm

Door dimensions (cm)	58x39x51	68x40x50	80x40x50
Output range	5,5-10,3 kW	6,7-12,5 kW	7,4-13,7 kW
Efficiency	>80% A+	>80% A+	80% A+
Line drawings	P.72	P.72	P.72



P.08



P.11



P.14



P.16



P.18



P.18



P.20



P.22



P.22



SCAN THIS QR CODE
FOR MORE INFORMATION



Premium Corner 58x39x51 (left)



SCAN THIS QR CODE
FOR MORE INFORMATION





LEAN Corner

68x28x48



This compact two-sided fireplace is ideal for smaller spaces. Two windows give a beautiful view of the flame pattern. The small size ensures sustainable use of wood for efficient heating. And the infrared glazing provides higher temperatures and even cleaner combustion.



Lean Corner 68x28x48

Benefits:

- Space-saving thanks to low installation depth
- Complete with unprinted glass with IR coating
- Integrated handle in the built-in frame
- Front glass can be tilted for easy cleaning
- Handy ashtray for ash collection

Door dimensions (cm)	68x28x48
Output range	5,5-10,3 kW
Efficiency	>80%
	A⁺
Line drawings	P.72



P.08



P.11



P.14



P.15



P.16



P.18



P.18



P.22



P.22

Lean Corner 68x28x48



LINEAR Corner

46x46x51



These versatile 2-sided wood fires can be installed in the corner of a room or inserted into an existing chimney, with the fire view facing left or right depending on your personal preference. Their compact sizes are ideal for smaller rooms or other locations around the home.



Linear Corner 46x46x51

Benefits:

- Compact and efficient heating
- Compatible with small diameter flues
- Suitable for corner installation

Door dimensions (cm) 46x46x51

Output range 4,9-9,1 kW

Efficiency 80%



Line drawings P.72



P.08



P.11



P.11



P.14



P.16



P.18



P.18



P.20



P.22



P.22

Linear Corner 46x46x51





SCAN THIS QR CODE
FOR MORE INFORMATION





LINEAR Corner

58x39x51



59x39x44



68x40x50



Available in portrait or landscape configurations, these medium-sized 2-sided wood fires offer great versatility in terms of placement and visual appeal. Existing chimneys can be adapted to accommodate these lovely fires or they can be installed using a wide variety of false chimneybreasts and hearths.



Linear Corner 68x40x50 (right)



SCAN THIS QR CODE
FOR MORE INFORMATION

Benefits:

- Versatile and convenient sizes
- For chimney or false chimney installation
- Flexible matching frames
- Also available with hinged door (Swing Corner 58x39x51 and Swing Corner 59x39x44)

Door dimensions (cm)	58x39x51	59x39x44	68x40x50
Output range	4,9-9,1 kW	4,8-9,0 kW	6,7-12,5 kW
Efficiency	>80% A+	>80% A+	80% A+
Line drawings	P.72	P.72	P.73



P.08



P.11



P.11



P.14



P.16



P.18



P.18



P.20



P.22



P.22



Linear Corner 58x39x51 (right)



Linear Corner 68x46x57 (left), with 6-sided solid frame




68x46x51 68x46x57 73x35x37

A modern interior featuring a minimalist fireplace with a glass front and a vertical log storage slot, set against a white wall. The background shows a contemporary kitchen and dining area.

Benefits:

- | | | | |
|----------------------|---|---|--|
| Door dimensions (cm) | 68x46x51 | 68x46x57 | 73x35x37 |
| Output range | 7,4-13,7 kW | 7,4-13,7 kW | 4,9-9,1 kW |
| Efficiency | >80%
 | >80%
 | 80%
 |
| Line drawings | P.73 | P.73 | P.73 |





LINEAR Corner

80x40x50



100x41x51



These larger than average 2-sided wood fires have a classic corner shape that can be used to divide living spaces or simply to create a stunning focal point in an existing chimney. With their higher heat outputs, they are suitable for larger rooms or open plan living.



Linear Corner 80x40x50 (left)

Benefits:

- Larger than average 2-sided dimensions
- Generous heat outputs
- Can be configured facing left or right

Door dimensions (cm)	80x40x50	100x41x51
Output range	7,7-14,3 kW	8,6-16,0 kW
Efficiency	>80% A+	>80% A+
Line drawings	P.73	P.73



P.08



P.11



P.14



P.16



P.18



P.18



P.20



P.22



P.22

Linear Corner 100x41x51 (right)





SCAN THIS QR CODE
FOR MORE INFORMATION



Premium Front 87x50



PREMIUM Front

87x50



The Premium Front 87x50 has a wide output range of 6.7-12.4 kW. This makes this wood fire very suitable for the average living room. A fireplace that meets the highest quality requirements, approvals and tests. Just like all other Premium built-in fireplaces, you are assured of years of heating pleasure.



Premium Front 87x50

Benefits:

- Concealed handle provides full view of the fire
- Choose from a black or white interior
- Door with a very smooth sliding mechanism
- Deep black, scratch-resistant paint that ensures a permanently beautiful fire
- Unobstructed view of the fire without a visible frame

Door dimensions (cm)	87x50
Output range	6,7-12,4 kW
Efficiency	>80%
	A+
Line drawings	P.74



P.08



P.11



P.14



P.16



P.18



P.18



P.20



P.22



P.22





LINEAR Front

60x51



65x80



In this selection, there are two compact wood fires with a choice of square or tapered interiors, allowing you to choose between lower or higher heat outputs for your home. The range also includes a taller model that takes full advantage of the height of your chimneybreast.



Linear Front 65x80



SCAN THIS QR CODE
FOR MORE INFORMATION

Benefits:

- Integral handle
- Square or vertical fire view
- Flexible output range

Door dimensions (cm)	60x51	65x80
Output range	4,9-9,1 kW	7,7-14,3 kW
Efficiency	>78% A	>78% A
Line drawings	P.74	P.74



P.11



P.11



P.14



P.16



P.18



P.18



P.18



P.20



P.22



P.22

Linear Front 60x51



SCAN THIS QR CODE
FOR MORE INFORMATION







LINEAR Front

67x51



67x57



These attractive, medium-sized wood fires are available in square or landscape formats and are ideally suited for insertion into a standard chimney or false chimneybreast. They have a flexible range of heat outputs and have impressive energy efficiency standards.



Linear Front 67x57

Benefits:

- Integral handle
- Ideal for modern or classic interiors
- Both available as a tunnel fire

Door dimensions (cm)	67x51	67x57
Output range	7,7-14,3 kW	7,7-14,3 kW
Efficiency	>80% A+	>80% A+
Line drawings	P.74	P.74



P.07



P.08



P.11



P.11



P.14



P.16



P.18



P.18



P.18



P.20



P.22



P.22

Linear Front 67x51



Linear Front 74x62



LINEAR Front

73x37



74x62



With this medium-sized wood fire selection, you have a choice of letterbox or standard landscape shapes and square or tapered interiors for flexibility of heat outputs. With their robust frames and integral door handles, they are simple to clean and maintain.



Linear Front 73x37

Benefits:

- Integral handle
- Linear 73x37 is also available as a tunnel variant
- Ideal for small or large living rooms
- Easy to regulate air supply

Door dimensions (cm)	73x37	74x62
Output range	4,9-9,1 kW	7,7-14,3 kW
Efficiency	>80% A⁺	80% A⁺
Line drawings	P.74	P.75



P.08



P.11



P.11



P.14



P.15

74x62
only



P.16



P.18



P.18



P.18



P.20



P.22

74x62
RLA
only



P.22



ECO
DESIGN
2022



LINEAR Front

87x50



This fireplace has an attractive size ratio with a width of 87 centimetres and a height of 50 centimetres. With their chunky frames and incorporated door handles, they are easy to control and clean.

Benefits:

- Integral handle (Linear Front 88x44 model also available as a tunnel fire)
- Choice of dimensions
- Heat resistant Chamotte interior

Door dimensions (cm)	87x50
Output range	6,7-12,4 kW
Efficiency	>80%
	
Line drawings	P.75



P.08



P.11



P.14



P.16



P.18



P.18



P.18



P.20



P.22



P.22





Linear Front 87x50



LINEAR Front

100x51



100x70



120x52



Are you looking for a wood fire that you can build low to the ground for a sleek, modern and luxurious look? The Linear Front 100x51 is a modern wood fire that flexible can be built in thanks to the low height under the door of 15 centimetres.

Big bigger Biggest! The system construction in combination with the relatively high window makes these fireplaces very suitable for low-level installation in a luxurious way.



Linear Front 120x52

Benefits:

- Integral handle
- Higher or lower installation options
- Linear Front 100x51 is also available as a tunnel fire

Door dimensions (cm)	100x51	100x70	120x52
Output range	7,3-13,5 kW	7,3-13,5 kW	10,5-19,5 kW
Efficiency	>78% A	80% A+	78% A
Line drawings	P.75	P.75	P.75



P.08



P.11



P.14



P.16



P.18



P.18

100x51 only



P.18



P.20



P.22



P.22

Linear Front 100x70





PREMIUM Tunnel

87x50



The very first tunnel fireplace in Spartherm's Premium elevating door fireplace series. With an extremely beautiful view of the fire from 2 sides. Unprinted glass and a concealed handle provide even more fire experience.



Premium Tunnel 87x50

Benefits:

- Tightly recessed door handle
- Underside of glass frameless
- Also available as a front fireplace

Door dimensions (cm)	87x50
Output range	7,4-13,8 kW
Efficiency	>80%
	A+
Line drawings	P.75



P.08



P.11



P.14



P.15



P.16



P.18



P.18



P.20



P.22



P.22

Premium Tunnel 87x50



SCAN THIS QR CODE
FOR MORE INFORMATION





Linear Tunnel 67x51, with 4-sided frame with sloped sides (picture shows the swing door view)





LINEAR Tunnel

73x37



87x50



100x52



This superb selection of see-through tunnel wood fires is available in medium, large and extra-large widths, with floor level or floating hearth installation options. Like all Spartherm fires, they have substantial heat outputs, high efficiency and gorgeous flames.



Linear Tunnel 100x52

Benefits:

- Integral handle
- Wide output range
- Luxury look with a choice of installation possibilities
- Standard with 1 elevating door (solid frame or frame with sloped sides) and 1 hinged door (frame with sloped sides), option to have 2 elevating doors (frame of choice)

Door dimensions(cm)	73x37	87x50	100x52
Output range	4,9-9,1 kW	7,4-13,8 kW	7,7-14,3 kW
Efficiency	>80% A⁺	82% A⁺	>79% A
Line drawings	P.76	P.76	P.76



P.08



P.11



P.14



P.15
87x50
only



P.16



P.18



P.18



P.20



P.22



P.22





SWING Insert



This selection of wood fire inserts has been designed to be installed directly into standard European or UK chimneys with minimal building conversion work. They are available in square, landscape, vertical and letterbox formats with robust frames and integral door handles for simple trouble-free operation. An optional external air kit ensures higher efficiency and cleaner burning.



Benefits:

- Chamotte floor and vermiculite side and back walls for maximum insulation and flame effect
- Interior, handle and air-slide in standard black finish (51x45 and 61x50 models)
- Provided with screen-printed glass for extra luxury finish
- Top or rear mounted flue connection
- Optional external air connection kit from base or rear of fire

Door dimensions (cm)	34x45	51x45	61x50	71x52	81x54
Output range	4,0-6,0 kW	4,5-6,5 kW	4,5-7,8 kW	4,9-9,1 kW	5,6-10,4 kW
Efficiency	>80% A+	79% A	78% A	78% A	78% A
Line drawings	P.77	P.77	P.77	P.77	P.77



P.18

P.18




51x45/61x50/
71x52/81x54
only






Swing Insert 81x54

LINE DRAWINGS




Premium Triple 60x38x50 (P. 26)
Premium A-3RL-60h






Premium Triple 80x41x50 (P. 26)
Premium A-3RL-80h

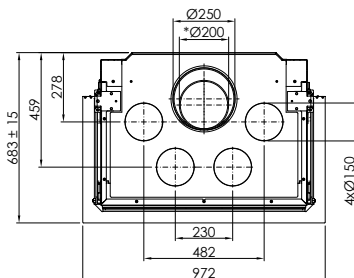




Premium Triple 50x54x50 (P. 28)
Premium A-U-50h






Premium Triple 50x74x50 (P. 28)
Premium A-U-70h

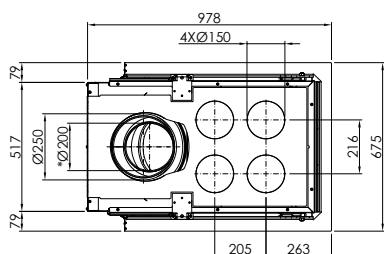


Lean Triple 68x28x48 (P. 30)
Lean 3RL-70h




Linear Triple 73x35x40 (P. 32)
Varia AS-3RLh




Linear Triple 60x38x50 (P. 34)
Arte 3RL-60h

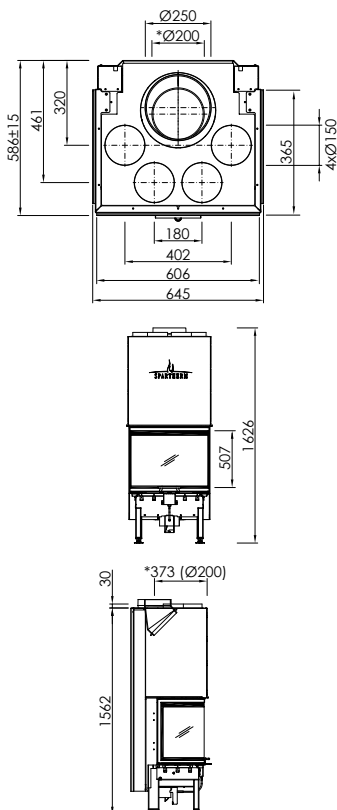


Linear Triple 80x41x50 (P. 34)
Arte 3RL-80h

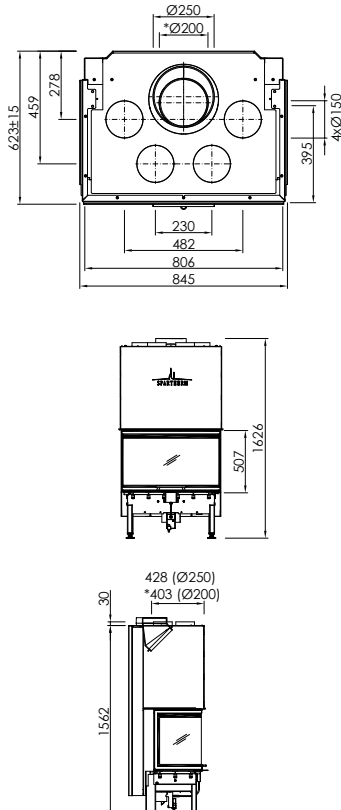


Linear Triple 100x45x56 (P. 34)
Arte 3RL-100h

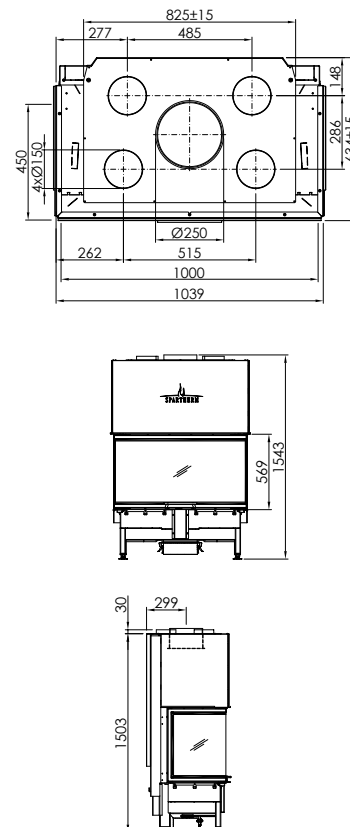


Linear Triple 50x54x50 (P. 36)
Arte U-50h

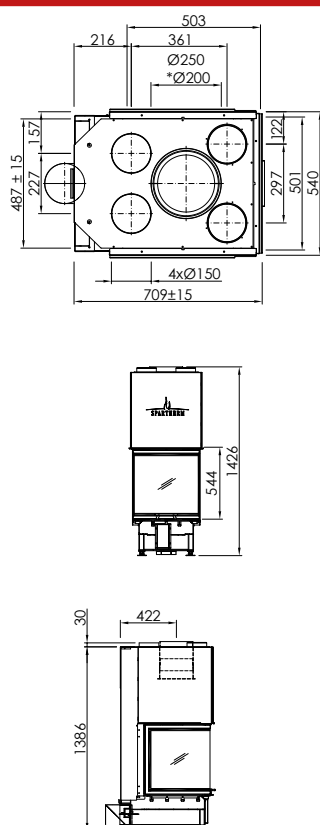

Linear Triple 50x74x50 (P. 36)
Arte U-70h



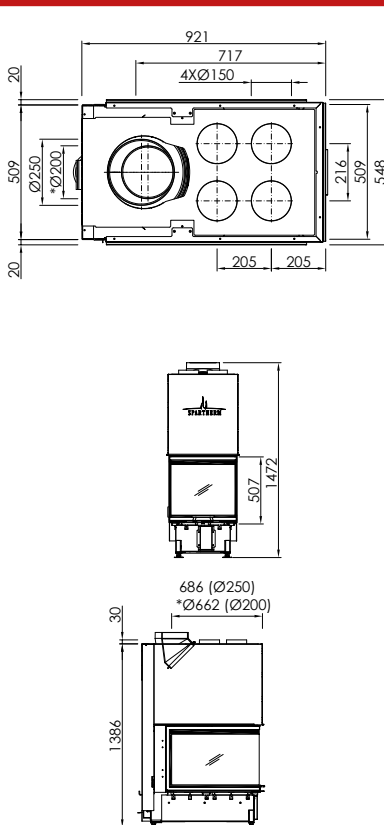


Linear Triple 55x91x54 (P. 36)
Arte U-90h



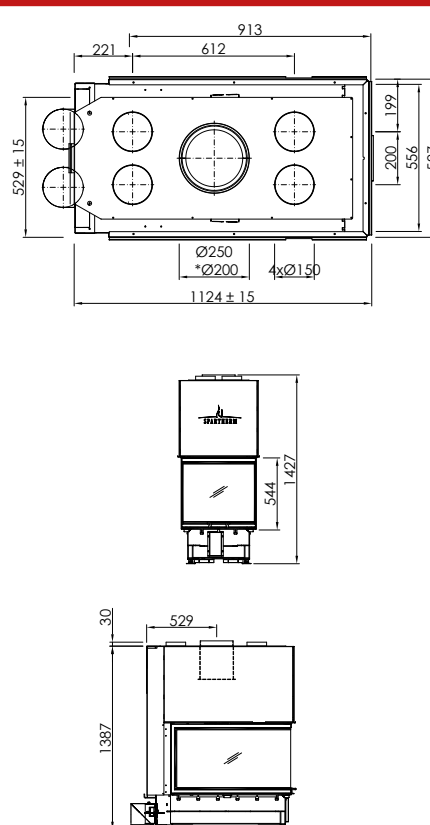


LINE DRAWINGS




Premium Corner 58x39x51 (P. 38)
Premium V-2L/2R-55h






Premium Corner 68x40x50 (P. 38)
Premium V-2L/2R-68h






Premium Corner 80x40x50 (P. 38)
Premium V-2L/2R-80h






Lean Corner 68x28x48 (P. 40)
Lean 2L/2R-70h






Linear Corner 46x46x51 (P. 42)
Mini 2LRh-51






Linear Corner 58x39x51 (P. 44)
Varia 2L/2R-55h






Linear Corner 59x39x44 (P. 44)
Varia 2L/2R-62h






Linear Corner 68x40x50 (P. 44)
Varia 2L/2R-68h






Linear Corner 68x46x51 (P. 46)
Varia 2Lh/2Rh-51






Linear Corner 68x46x57 (P. 46)
Varia 2Lh/2Rh-57






Linear Corner 73x35x37 (P. 46)
Varia AS-2Lh/2Rh



Linear Corner 80x40x50 (P. 48)
Varia 2L/2R-80h






Linear Corner 100x41x51 (P. 48)
Varia 2L/2R-100h



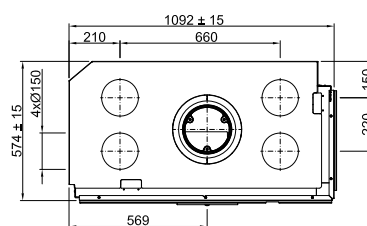


LINE DRAWINGS




Premium Front 87x50 (P. 50)
Premium V-1V-87h

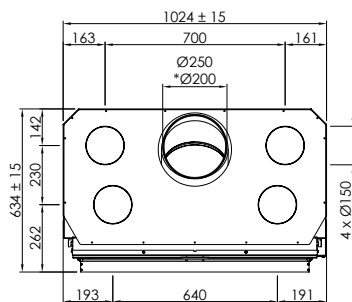




Linear Front 60x51 (P. 52)
Mini Sh






Linear Front 65x80 (P. 52)
Arte Bh






Linear Front 67x51 (P. 54)
Varia 1Vh-51






Linear Front 67x57 (P. 54)
Varia 1Vh-57





Linear Front 73x37 (P. 56)
Varia ASH






Linear Front 74x62 (P. 56)
Varia Sh





Linear Front 87x50 (P. 58)
Varia 1V-87h

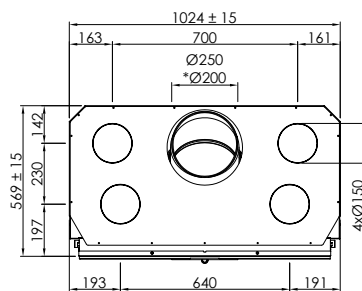




Linear Front 100x51 (P. 60)
Varia Bh






Linear Front 100x70 (P. 60)
Varia 1V-100h



Linear Front 120x52 (P. 60)
Varia B-120h






Premium Tunnel 87x50 (P. 62)
Premium V-FD-87h






LINE DRAWINGS




Linear Tunnel 60x51 (P. 64)
Mini S-FDh






Linear Tunnel 67x51 (P. 64)
Varia FDh-51






Linear Tunnel 67x57 (P. 64)
Varia FDh-57






Linear Tunnel 73x37 (P. 66)
Varia AS-FDh






Linear Tunnel 87x50 (P. 66)
Varia FD-87h






Linear Tunnel 100x52 (P. 66)
Varia B-FDh

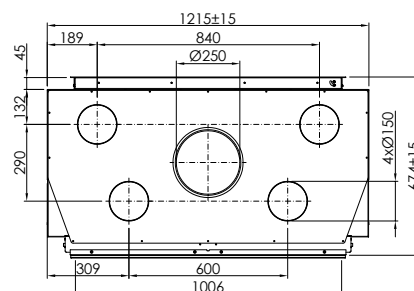




Swing Insert 34x45 (P. 68)
Linear XS (kader 45 mm)






Swing Insert 51x45 (P. 68)
Linear S (kader 60 mm)






Swing Insert 61x50 (P. 68)
Linear M (kader 60 mm)



Swing Insert 71x52 (P. 68)
Linear L (kader 60 mm)



Swing Insert 81x54 (P. 68)
Linear XL (kader 60 mm)



TECHNICAL SPECIFICATIONS

Built-in wood burning fireplaces	Spartherm ID	Page	Net output (kW)	Output range (kW)	Efficiency (%)	Energy efficiency class P.18	Convection chamber P.17	Combustion P.18	RLA	RLU
										
 3-SIDED FIRES, WxDxH (cm)										
PREMIUM SERIES, elevating door with concealed handle 										
Premium Triple 60x38x50	Premium A-3RL-60h	P.26	10,0	7,0-13,0	>80	A+	√	√	-	
Premium Triple 80x41x50	Premium A-3RL-80h	P.26	11,4	8,0-14,8	80	A+	√	√	-	
Premium Triple 50x54x50	Premium A-U-50h	P.28	9,3	6,5-12,1	>80	A+	√	√	-	
Premium Triple 50x74x50	Premium A-U-70h	P.28	11,4	8,0-14,8	>80	A+	√	√	-	
LEAN SERIES, elevating door with concealed handle 										
Lean Triple 68x28x48	Lean 3RL-70h	P.30	7,5	5,3-9,8	>80	A+	-	√	-	
LINEAR SERIES, elevating door with integral handle 										
Linear Triple 73x35x40	Varia AS-3RLh	P.32	8,4	5,9-10,9	80	A+	√	√	-	
Linear Triple 60x38x50	Arte 3RL-60h	P.34	10,0	7,0-13,0	>80	A+	√	√	-	
Linear Triple 80x41x50	Arte 3RL-80h	P.34	11,4	8,0-14,8	80	A+	√	√	-	
Linear Triple 100x45x56	Arte 3RL-100h	P.34	11,0	7,7-14,3	>78	A	√	√	-	
Linear Triple 50x54x50	Arte U-50h	P.36	9,0	6,3-11,7	80	A	√	√	-	
Linear Triple 50x74x50	Arte U-70h	P.36	11,4	8,0-14,8	>80	A+	√	√	-	
Linear Triple 55x91x54	Arte U-90h	P.36	13,0	9,1-16,9	>78	A	√	√	-	
 2-SIDED FIRES, WxDxH (cm)										
PREMIUM SERIES, elevating door with concealed handle 										
Premium Corner 58x39x51	Premium V-2L/2R-55h	P.38	7,2	5,5-10,3	>80	A+	√	√	-	
Premium Corner 68x40x50	Premium V-2L/2R-68h	P.38	9,6	6,7-12,5	>80	A+	√	√	-	
Premium Corner 80x40x50	Premium V-2L/2R-80h	P.38	10,5	7,4-13,7	80	A+	√	√	-	
LEAN SERIES, elevating door with concealed handle 										
Lean Corner 68x28x48	Lean 2L/2R-70h	P.40	7,9	5,5-10,3	>80	A+	-	√	-	

Chimney connection Ø		Built-in depth		External air connection P.18		Max. log length		Chamotte interior P.10		Door type P.11		Self-closing door		Glass window P.15		S-USI II P.22		Sesam P.22		S-Thermatik NEO P.08		Central heating fire P.07	
	standard (mm)	option ¹⁾ (mm)	(mm)	included	option	(cm)	(kg)	black	white			single	double	Infra-red glass (IR)	option	option	option	option					
																							
	250	200	645	√	-	33	321	-	√	Elevating	-	3 parts	-	-	√	√	√	-					
	250	200	683	√	-	33	360	-	√	Elevating	-	3 parts	-	-	√	√	√	-					
	250	200	773	√	-	33	235	√	√	Elevating	-	3 parts	-	-	√	√	√	-					
	250	200	978	√	-	33	365	√	√	Elevating	-	3 parts	-	-	√	√	√	-					
	150	-	468	√	-	25	231	√	√	Elevating	-	3 parts	-	√	√	√	√	-					
	200	180	527	-	√	33	224	√	√	Elevating	-	3 parts	-	-	√	√	√	-					
	250	200	601	√	-	33	264	√	√	Elevating	-	3 parts	-	-	√	√	√	-					
	250	200	638	√	-	33	337	√	√	Elevating	-	3 parts	-	-	√	√	√	-					
	250	-	649	-	√	33	381	√	√	Elevating	-	3 parts	-	-	√	√	√	-					
	250	200	724	√	-	33	235	√	√	Elevating	√	3 parts	-	-	√	√	√	-					
	250	200	921	√	-	33	342	√	√	Elevating	√	3 parts	-	-	√	√	√	-					
	250	200	1139	√	-	33	392	√	√	Elevating	√	3 parts	-	-	√	√	√	-					
	200	180	495	√	-	33	265	√	√	Elevating	-	2 parts	-	-	√	√	√	-					
	250	200	641	√	-	33	310	√	√	Elevating	-	2 parts	-	-	√	√	√	-					
	250	200	641	√	-	33	350	√	√	Elevating	-	2 parts	-	-	√	√	√	-					
	150	-	479	√	-	25	260	√	√	Elevating	-	3 parts	-	√	√	√	√	-					

TECHNICAL SPECIFICATIONS

Built-in wood burning fireplaces	Spartherm ID	Page	Net output (kW)	Output range (kW)	Efficiency (%)	Energy efficiency class P.18	Convection chamber P.17	Combustion P.18	RLA	RLU
										
LINEAR SERIES, elevating door with integral handle 										
Linear Corner 46x46x51	Mini 2LRh-51	P.42	7,0	4,9-9,1	80	A+	√	√	-	
Linear Corner 58x39x51	Varia 2L/2R-55h	P.44	7,0	4,9-9,1	>80	A+	√	√	√	
Linear Corner 59x39x44	Varia 2L/2R-62h	P.44	6,9	4,8-9,0	>80	A+	√	√	√	
Linear Corner 68x40x50	Varia 2L/2R-68h	P.44	9,6	6,7-12,5	80	A+	√	√	-	
Linear Corner 68x46x51	Varia 2Lh/2Rh-51	P.46	10,5	7,4-13,7	>80	A+	√	√	-	
Linear Corner 68x46x57	Varia 2Lh/2Rh-57	P.46	10,5	7,4-13,7	>80	A+	√	√	-	
Linear Corner 73x35x37	Varia AS-2Lh/2Rh	P.46	7,0	4,9-9,1	80	A+	√	√	-	
Linear Corner 80x40x50	Varia 2L/2R-80h	P.48	11,0	7,7-14,3	>80	A+	√	√	-	
Linear Corner 100x41x51	Varia 2L/2R-100h	P.48	12,3	8,6-16,0	>80	A+	√	√	-	
FRONT FIRES, WxH (cm)										
PREMIUM SERIES, elevating door with concealed handle 										
Premium Front 87x50	Premium V-1V-87h	P.50	9,5	6,7-12,4	>80	A+	√	√	-	
LINEAR SERIES, elevating door with integral handle 										
Linear Front 60x51	Mini Sh	P.52	7,0	4,9-9,1	>78	A	√	√	√	
Linear Front 65x80	Arte Bh	P.52	11,0	7,7-14,3	>78	A	√	√	√	
Linear Front 67x51	Varia 1Vh-51	P.54	11,0	7,7-14,3	>80	A+	√	√	√	
Linear Front 67x57	Varia 1Vh-57	P.54	11,0	7,7-14,3	>80	A+	√	√	√	
Linear Front 73x37	Varia ASh	P.56	7,0	4,9-9,1	>80	A+	√	√	√	
Linear Front 74x62	Varia Sh	P.56	11,0	7,7-14,3	80	A+	√	√	√	
Linear Front 87x50	Varia 1V-87h	P.58	9,5	6,7-12,4	>80	A+	√	√	-	
Linear Front 100x51	Varia Bh	P.60	10,4	7,3-13,5	>78	A	√	√	√	
Linear Front 100x70	Varia 1V-100h	P.60	10,4	7,3-13,5	80	A+	√	√	-	
Linear Front 120x52	Varia B-120h	P.60	15,0	10,5-19,5	78	A	√	√	-	

¹⁾ smaller chimney connection possible (with adapter)

Chimney connection Ø		Built-in depth		External air connection P.18		Max. log length	Weight	Chamotte interior P.10		Door type P.11	Self-closing door	Glass window P.15		S-USI II P.22		Sesam P.22	S-Thermatik NEO P.08	Central heating fire P.07
standard (mm)	option ¹⁾ (mm)	(mm)	included	option	(cm)	(kg)	black	white			single	double	Infra-red glass (IR)	option	option	option	option	
																		
	180	-	569	-	√	33	199	√	√	Elevating	-	2 parts	-	-	√	√	√	-
	180	-	496	-	√	33	222	√	√	Elevating	-	2 parts	-	-	√	√	√	√
	180	-	442	√	-	33	206	√	√	Elevating	-	2 parts	-	-	√	√	√	-
	250	200	571	√	-	33	310	√	√	Elevating	-	2 parts	-	-	√	√	√	-
	200	180	581	-	√	33	274	√	√	Elevating	-	2 parts	-	√	√	√	√	√
	200	180	581	-	√	33	277	√	√	Elevating	-	2 parts	-	√	√	√	√	-
	200	180	514	-	√	33	199	√	√	Elevating	-	2 parts	-	-	√	√	√	-
	200	180	551	-	√	33	310	√	√	Elevating	-	2 parts	-	-	√	√	√	-
	250	200	589	-	√	33	320	√	√	Elevating	-	parts	-	-	√	√	√	-
	250	200	634	√	-	33	350	√	√	Elevating	-	1 part	-	-	√	√	√	-
	180	-	495	-	√	25	175	√	√	Elevating	-	1 part	option	-	√	√	√	-
	200	180	571	-	√	33	287	-	√	Elevating	-	1 part	option	-	√	√	√	-
	200	180	621	-	√	33	255	√	√	Elevating	-	1 part	option	-	√	√	√	√
	200	180	621	-	√	33	255	√	√	Elevating	-	1 part	option	-	√	√	√	√
	180	-	481	-	√	33	209	√	√	Elevating	-	1 part	option	-	-	-	√	-
	200	180	561	-	√	33	272	√	√	Elevating	-	1 part	option	√	√	√	√	-
	250	200	569	√	-	33	350	√	√	Elevating	-	1 part	option	-	√	√	√	-
	250	200	575	-	√	33	350	√	√	Elevating	-	1 part	option	-	√	√	√	-
	250	200	536	-	√	33	394	√	√	Elevating	-	1 part	option	-	√	√	√	-
	250	-	546	-	√	33	369	√	√	Elevating	√	1 part	option	-	√	√	√	-

TECHNICAL SPECIFICATIONS

Built-in wood burning fireplaces	Spartherm ID	Page	Net output (kW)	Output range (kW)	Efficiency (%)	Energy efficiency class P.18	Convection chamber P.17	Combustion P.18	RLA	RLU
 TUNNEL FIRES, WxH (cm)										
PREMIUM SERIES, elevating door with concealed handle 										
Premium Tunnel 87x50	Premium V-FDh-87h	P.62	10,6	7,4-13,8	>80	A+	√	√	-	
LINEAR SERIES, elevating door with integral handle 										
Linear Tunnel 60x51	Mini S-FDh-4S	P.64	6,0	4,5-7,8	>78	A	√	√	-	
Linear Tunnel 67x51	Varia FDh-51-4S	P.64	11,6	8,1-15,1	80	A+	√	√	-	
Linear Tunnel 67x57	Varia FDh-57-4S	P.64	11,6	8,1-15,1	80	A+	√	√	-	
Linear Tunnel 73x37	Varia AS-FDh-4S	P.66	7,0	4,9-9,1	>80	A+	√	√	-	
Linear Tunnel 87x50	Varia FDh-87h-4S	P.66	10,6	7,4-13,8	82	A+	√	√	-	
Linear Tunnel 100x52	Varia B-FDh-4S	P.66	11,0	7,7-14,3	>79	A	√	√	-	
INSERTS, WXH (CM) 										
SWING SERIES, hinged door with integral handle 										
Swing Insert 34x45	Linear XS	P.68	4,6	4,0-6,0	>80	A+	-	√	-	
Swing Insert 51x45	Linear S	P.68	4,5-6,5	79	A	A+	-	√	-	
Swing Insert 61x50	Linear M	P.68	4,5-7,8	78	A	A+	-	√	-	
Swing Insert 71x52	Linear L	P.68	4,9-9,1	78	A	A+	-	√	-	
Swing Insert 81x54	Linear XL	P.68	5,6-10,4	78	A	A	-	√	-	

¹⁾ smaller chimney connection possible (with adapter)

²⁾ optional with 2 elevating doors

Chimney connection Ø		Built-in depth		External air connection P.18		Max. log length		Weight		Chamotte interior P.10		Door type P.11		Self-closing door		Glass window P.15		S-USI II P.22		Sesam P.22		S-Thermatik NEO P.08		Central heating fire P.07	
standard (mm)	option ¹⁾ (mm)	(mm)	included	option	(cm)	(kg)	black	white			single	double	Infrared glass (IR)	option	option	option	option			option	option	option	option		
																									
	200	-	640	√	-	33	360	√	√	Elevating	-	1 part	-	√	√	√	√	-							
	200	180	603	-	√	25	266	√	√	Elevating ²⁾ (1 side)	-	1 part	option	-	√	√	√	-							
	250	-	651	-	√	33	265	√	√	Elevating ²⁾ (1 side)	-	1 part	option	-	√	√	√	√							
	250	-	651	-	√	33	286	-	√	Elevating ²⁾ (1 side)	-	1 part	option	-	√	√	√	-							
	180	-	457	-	√	33	206	√	√	Elevating ²⁾ (1 side)	-	1 part	option	-	√	√	√	-							
	200	-	501	√	-	33	335	√	√	Elevating ²⁾ (1 side)	-	-	1 part	√	√	√	√	-							
	250	-	689	-	√	50	390	√	√	Elevating ²⁾ (1 side)	-	1 part	option	-	√	√	√	-							
	130	-	342	-	-	33	80	-	√	Hinged	-	1 part	-	-	-	√	-	-							
	150	-	452	-	√	33	80	-	√	Hinged	-	1 part	-	-	-	√	-	-							
	150	-	484	-	√	33	90	-	√	Hinged	-	1 part	-	-	-	√	-	-							
	180	-	514	-	√	33	110	-	√	Hinged	-	1 part	-	-	-	√	-	-							
	200	-	544	-	√	33	135	-	√	Hinged	-	1 part	-	-	-	√	-	-							

Spartherm and DRU

A partnership forged in excellence

The partnership between Spartherm and DRU ensures that your new wood fire delivers excellence at every stage of its journey, from the factory to your home.

From superior German fireplace design and technology to expert customer service at the point of sale, Spartherm and DRU are the perfect partners.

Spartherm is an European trailblazer in the field of wood fires and stoves, making over 55,000 appliances every year.

DRU is a global force in the fireplace industry, with distributors in more than twenty countries, dealer networks in all those countries and an unrivalled expertise in marketing, dealer training and customer support.

So, you can choose your new wood fire with the full confidence that it will be produced, delivered and installed by an organisation with excellence in its DNA.

Dealer

Drugasar Ltd.
Deans Road | Swinton
Manchester | M27 0JH
United Kingdom
T. +44 (0)161 - 793 8700
www.drufire.com



www.drufire.com



BY APPOINTMENT OF
THE COURT OF THE NETHERLANDS

since
1754



DRU: Member of the Spartherm-Group

All changes reserved. The colours in this brochure may differ from the actual colours. Some (chamotte) interiors are different in color and structure than shown in the pictures. Nothing in this publication may be used without the written permission of DRU Verwarming B.V.

SOCIAL MEDIA: For more inspiration and information, visit one of our social media channels or scan the QR code:

