

At the heart of your home

Gas Fires 2023/24



BRITISH MANUFACTURING





Welcome to Flavel



Today BFM Europe is the fastest growing domestic fire producer in the country with an unequalled reputation for quality and service. Every

Flavel branded gas fire is developed and manufactured in Britain at our purpose built, state-of-the-art facility in

Stoke-on-Trent.



Every model* carries the peace of mind of a 7 year guarantee and the reassurance of the Flavel Airwatch System on all living flame effect fires. This device immediately cuts off the gas supply in the unlikely event of the flame being extinguished through blockage.

Our 7 year guarantee is subject to terms & conditions including annual services carried out by a Gas Safe Register engineer and annual replacement of the oxy-pilot assembly (or thermocouple on balanced flue models).



At Flavel we know how important it is to create a stylish and relaxing living environment. That's why we've developed this collection of affordable gas fires to complement all tastes and lifestyles. I believe our success stems from a combination of innovative design, investment in technology and the highest quality manufacturing standards. As a result all Flavel gas fires carry a 7 year guarantee to reflect my belief in their quality and durability.

This brochure has been designed to make the purchase of your new Flavel gas fire as simple as possible. I hope you will find it both informative and inspiring.





Flavel products are fully compliant with the Eco design directive Commission Regulation (EU) 2015/1188.

DSI. Product Testing & Certification

All our gas fires are independently tested, approved and verified by the British Standards Institution (BSI) to meet the latest standards for performance, safety and efficiency.

The BSI is an independent organisation. They are not owned by the government, industry or shareholders, which means that they can be totally objective with regards testing and certification. This gives their assessments more authority than those of an organization that has a vested interest in promoting its members.

They have some of the most experienced and knowledgeable staff in the world and are recognised internationally for their technical expertise, quality services and in-depth knowledge of gas and electrical testing and certification.

The wide-ranging capability of their testing facilities and the broad expertise and knowledge of their testing and certification staff ensures our products are rigorously tested with the utmost integrity.



Conforms to GB legislation

Contents

Guide to efficiencies and fire types4 -	ļ
Before you Begin - guide to icons	(

Balanced Flue

Rocco BF.

Jazz BF...

Calibre BF...

Orchestra BF...

Sophia Slimline BF...

Emberglow BF....

.. 34

.36

.37

.38

..40

41

Wall Inset - Glass Fronted

Hearth Inset - Glass Fronted

Fireplace Suites - Glass Fronted

Hearth Outset - Glass Fronted

highefficiency

Conventional Flue

Wall Outset - Glass Fronted
Curve7
Wall Inset - Glass Fronted
Rocco HE8
Jazz HE9
Expression HE10
Diamond HE11
Windsor Contemporary HE12
Wall Inset - Open Fronted
Windsor Contemporary Plus13
Fireplace Suites - Glass Fronted
Sophia Suite14-15

Hearth Inset - Glass Fronted	
Romance	16-17
Caress HE	18
Decadence HE & Decadence Slimlin	e HE19
Kenilworth HE	20
Linear HE	21
Windsor Contemporary HE	22
Windsor Traditional HE	23
Hearth Inset - Open Fronted	
Richmond Plus & Richmond	24
Caress Plus & Caress	25
Calypso Plus & Calypso	26
Rhapsody Plus & Rhapsody	27
Decadence Plus	28
Linear Plus	29
Kenilworth Plus	30
Expression Plus	31
Windsor Contemporary Plus	32
Windsor Traditional Plus	33
Hearth Outset - Glass Fronted	

Emberglow.....

Misermatic.....

Regent.....

Strata.

Firenza..

Hearth Outset - Open Fronted

Renaissance

Jane 1
The second
Orchestra BF - page 43


sta	nd	an	dfii	
Jud	HU	aı ı	ulli	

Conventional Flue

Rocco HE - page 8

Wall Inset - Open Fronted	
Windsor Contemporary	44
Finesse	
Hearth Inset - Open Fronted	
Caress Slimline	46
Waverley	47
Windsor Contemporary, & Traditional Melody	
•	

Hearth Outset - Open Fronted Regent LFE.....



Builders' Opening Sizes.....

highefficiency

Get up to 93.5% energy efficiency from your gas fire...

Flavel is a British manufacturer with a reputation for excellent quality gas fires. Our R&D team continue to invest in developing new technology to produce gas fires that save energy and as a result, help to keep costs down.

The Flavel high efficiency range combines exceptional heat output with lower running costs compared to standard gas fires.

Conventional Flue

Glass Fronted



Our glass fronted high efficiency conventional flue fires have an energy efficiency of up to 86.3%. The glass panel across the front which concentrates radiant heat generated from the fuel bed and forces it directly into the room with less heat lost through the chimney. Convected heat is also produced by cool air drawn into the base of the fire through the heat exchanger and then emitted as warm air through the gap above the canopy, making these the most efficient conventional flue fires available.

Open Fronted



Our open fronted high efficiency conventional flue fires can reach an energy efficiency of up to 68.3%. These fires provide the look and feel of a real open fire providing both radiant and convected heat. Radiant heat is emitted from the coal effect fuel bed and the convected heat is generated by cool air drawn into the base of the fire which passes through a heat exchanger and is then emitted as warm air though the gap above the canopy.


Balanced Flue


Glass Fronted



Our glass fronted high efficiency balanced flue fires have an energy efficiency of up to 93.5%. Designed for those who want all the benefits of a gas fire but don't have a built in chimney or flue in their home, a balanced flue fire comes with its own flue terminal which is vented directly through an outside wall. They are glass fronted, completely room sealed appliances and work by drawing and venting external air via a pair of co-axial tubes into the fire for combustion purposes.

standardfires





Standard fires can achieve a direct heat output of up to 3.1kW. It is recommended that these products are not suitable for use as a primary heat source, but are ideal if you are looking for a great fireplace feature for occasional use.

Fires for every home

What type of Flavel fire will suit your home best?

From traditional to contemporary, slimline to full depth, we have models to suit all types of situation and installation.

There is a Flavel fire to make anywhere feel like home.

Browse through the fire options below, then use the guide on page 6 to help you identify which type of chimney or flue you have.

Every product page displays icons to identify flue suitability, fuel type, control options, and more.

Wall Inset



To complement a contemporary home choose a wall inset product, otherwise known as a hole-in-the-wall fire. We have models available for all chimney and flue types.

Hearth Inset



A hearth inset fire saves space as it is recessed into the chimney breast or flue.

Available in a choice of slimline or full depth fuel beds, with balanced flue options for homes without a chimney or flue.

Fireplace Suite



A Suite really makes a statement in a room and comes complete with the surround and gas fire suitable for conventional as well as balanced flues.

Wall Outset



This type of fire has a direct connection to the flue and is fitted onto the wall with minimal building work required. A virtually hassle-free installation, and a perfect complement to homes requiring performance and aesthetics.

Hearth Outset



Set onto a hearth this type of fire takes a more prominent position in a room with some models offering the option of side windows so that the flame pattern can be seen from wider angles.

Before you begin

Type of Chimney or Flue

The type of chimney or flue you have dictates the type of fire you can have. If you're not sure, then take a look at your roof and compare it with the simple guide below. It's worth remembering that a full depth fire often requires a traditional chimney or rebate on the fire surround, whilst a slimline fire will fit virtually any chimney or flue.



Brick Chimney - Class 1 Flues

Apart from products designed for "no chimney" applications, all Flavel products will fit brick chimneys. They are easily recognisable by a chimney stack with accompanying terracotta pot or gas terminal.



Pre-Fabricated Flue - Class 2 Flues

Pre-fabricated flues are easily identifiable by a metal flue and terminal on the roof and a metal flue box behind the fire.




Pre-Cast Flue

Pre-cast flues can be identified by a ridge vent or metal flue tube and terminal on the roof. Constructed from concrete or clay blocks they form a rectangular section flue. All Flavel fires featuring this icon are only suitable for Pre-Cast flues conforming to BS EN 1858.

Controls



Manual Control A simple and discreet control system located behind the fire's trim or fret on inset fires and the bottom right



Slide Control Convenient control that eliminates the necessity of bending down.

side on outsets.



Top Control A push down and twist ignition and control located on the top of outset fires means you don't have to bend down to light the fire.



Remote Control The remote control handset is used to light the fire as well as adjust the flame height and heat output.



Semi Remote Control Light the fire using the manual control system then use the remote control handset to adjust the flame height and heat output.



Electronic Flame Control Discreet easy access buttons are used to ignite the fire and adjust heat and flame height.



Remote Control with Thermostat

The remote control handset can be used to light the fire as well as to adjust the flame height and heat output. Thermostatic control function can also regulate room temperature.



Electronic Top or Side Control System Both ignition and heat are controlled by a single rotary motion to light the fire. These easy to use controls are now available on our best selling radiant outsets. Requires an AA battery.

Can't see a Chimney or Flue?

If you can't see a chimney or flue like the ones described on the left, then you will require a Balanced Flue.



Balanced Flue Balanced Flue fires use a horizontal pipe to vent directly outside. An electricity supply is not required for Balanced Flue products.

Gas Supply

Your gas supply will either be natural gas or LPG, depending on the area in which you live.



Natural Gas

If you have a gas meter then you will have natural gas.



LPG is the most popular alternative to natural das.

Fuel Effect









Driftwood

Decorative

Interior Panels





Plain Black



Ribbed Black Brick Effect

highefficiency Conventional Flue - Wall Outset - Glass Fronted



Curve

The Curve "hang-on-the-wall" fire with its sleek lines, textured fascia and glass front, complements the unique flame pattern created by an undulating back panel. This stunning fire is easy to install as it literally hangs on the wall, rather than slotting into the structure. The Curve is perfectly suited to contemporary homes requiring state-of-the-art appearance and the performance to match.

Specifications


Description: Slimline outset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		68.3%
Energy efficiency class		F
Fuel type		Natural gas
Direct heat output		4.0kW
Control type	Colour	Model Number
Remote	Black	FCRROORN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally











highefficiency Conventional & Balanced Flue - Wall Inset - Glass Fronted



Rocco HE

This stunning glass fronted hole-in-the-wall fire features a realistic log fuel effect and comes in a choice of chrome or black trim options.

Specifications

Description: Full depth inset gas fire Type of Heat: Radiant & Convected

		Conventional	Balanced
Useful energy efficiency		73.9%	80.8%
Energy efficiency class		E	Е
Fuel type		Natural gas	Natural gas
Direct heat output		3.6kW	5.5kW
Control type Colour		Model Number	

FPHL21RN2

FPHL22RN2

FBFL22RN3


Black Safety: Flame Supervision Device & Airwatch System (not applicable to balanced flue models) Air vent required: Not normally



Rocco HE A 621mm B 921mm C 516mm D 306mm E 728mm

Rocco BF A 613mm B 910mm C 515mm D 350mm

* Semi remote control, balanced flue model only.



Rocco HE with black trim

highefficiency Conventional & Balanced Flue - Wall Inset - Glass Fronted



Jazz HE

This stunning glass fronted hole-in-the-wall fire has petite dimensions and a highly realistic log fuel effect. Both the Jazz HE and balanced flue models feature a black back and high quality trims in two finishes -chrome and black.

Specifications


Description: Full depth inset gas fire Type of Heat: Radiant & Convected

	Conventional	Dalaliceu
Useful energy efficiency	81.4%	83.9%
Energy efficiency class	D	D
Fuel type	Natural gas	Natural gas
Direct heat output	3.2kW	4.2kW

Control type Chrome FHCL21RN FJBL21RN Remote FHCL22RN FJBL22RN

Safety: Flame Supervision Device & Airwatch System (not applicable to balanced flue models) Air vent required: Not normally



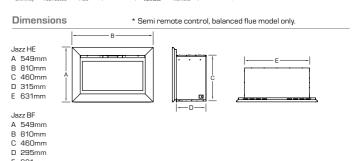



Jazz HE with chrome trim



highefficiency Conventional Flue - Wall Inset - Glass Fronted



Ecodesign Compliant

Expression HE

The Flavel Expression HE hole in the wall high efficiency gas fire is a contemporary and economical heating solution with an energy efficiency of 84.3%. This fully glass fronted model features a stunning chrome fascia design and is operated by a fully automatic remote control system.

Description: Full depth inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency	84.3%
Energy efficiency class	С
Fuel type	Natural gas
Direct heat output	3.4kW
Control type	Model Number
В .	FLUCOFLIDAL

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally




















highefficiency Conventional Flue - Wall Inset - Glass Fronted



Diamond HE

As Flavel's debut high efficiency hole-in-the-wall fire, the Diamond HE is a contemporary and economical heating solution with an energy efficiency of 84.3%. This glass fronted fire features the stunning chrome and black 'Diamond' fascia design and is available with a choice of coal or pebble fuel effect.

Specifications

Description: Full depth inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		84.3%
Energy efficiency class		С
Fuel type		Natural gas
Direct heat output		3.4kW
Fuel effect	Combinal towns	Model Number
Fuel effect	Control type	Model Number
Coal	Remote	FHDC00RN3
Pebble	UCITIONS	FHDPOORN3

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally





- A 650mm B 600mm
- C 550mm D 180mm E 365mm F 65mm







Diamond HE with pebble fuel effect



highefficiency Conventional Flue - Wall Inset - Glass Fronted



Windsor Contemporary HE

The Windsor Contemporary glass fronted high efficiency wall inset gas fire comes with the option of a coal or pebble fuel bed and features a large viewing window and chrome fascia. This extremely versatile fire will fit into almost any chimney or flue.

Description: Slimline inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		ency	81.3%
Energy efficiency class			D
Fuel type			Natural gas
	Direct heat output		2.9kW
	Fuel effect	Control type	Model Number
	Coal	Manual	FSHCHWMN
	Pebble	IVIariual	FSHPHWMN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally

Dimensions

- B 512mm C 550mm D 125mm E 327mm











Windsor Contemporary HE

highefficiency

Conventional Flue - Wall Inset - Open Fronted



Windsor Contemporary Plus

The Windsor Contemporary wall inset gas fire is also available as an open fronted model featuring a large viewing window and chrome fascia. There is a choice of a coal or pebble fuel bed and this very versatile fire will fit into almost any chimney or flue.

Description: Slimline inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		66.8%
Energy efficiency class		F
Fuel type		Natural gas
Direct heat output		4.0kW
Fuel effect	Control type	Model Number
Coal	- Manual	FSPCHWMN
Pebble	IVIariual	FSPPHWMN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



- B 512mm C 550mm D 125mm E 327mm







Windsor Contemporary Plus with pebble fuel effect

Sophia Suite

The Sophia suite features a large high efficiency gas fire, and is framed with a beautifully designed Royal Botticino marble surround. This suite benefits from a non reflective glass front, that delivers an uninterrupted view of the log fuel effect.

This suite is available in a conventional flue or slimline balanced flue version, and is operated by a multifunctional remote control handset. The remote control system includes a thermostatic operation which automatically adjusts the heat output up or down to maintain your desired pre-set temperature. There is also a wake/sleep timer function which lets you specify when the fire will

For optimum efficiency the Sophia comes with a built in electronic fan that is used to circulate convected heat around the room.



Specifications

Description: Full depth fireplace suite Type of Heat: Radiant & Convected

	**	
	Conventional	Balanced
Useful energy efficiency	82%	87.2%
Energy efficiency class	D	С
Fuel type	Natural gas	Natural gas
Direct heat output	5.6kW	4.3kW
Control type	Model Number	
Remote	FDCLRBRN2+B-163230	FSBLBTRN+B-179830

Safety: Flame Supervision Device & Airwatch System (not applicable to balanced flue models)

Air vent required: Not normally

Dimensions

F 410mm G 746mm H 550mm

B 1450mm

J 960mm K 1450mm





F 793mm G 921mm H 352mm

A 1233mm

B 1480mm





I 200mm J 410mm K 727mm L 727mm













Romance

Romance is an exceptionally stylish and impressive natural log fuel effect gas fire.

This glass fronted fire is available in two control options, remote, or manual, both delivering an exceptional heat output of 4.0kW, with a high efficiency rating upto 82.6%. The Romance is designed with a large clear glass window to provide wide-angle views of the lively full depth log burning fuel effect.

This stunning gas fire is further complemented with a choice of uniquely designed fascias, and are available in Black Nickel & Black, Black Nickel & Chrome, and Satin Silver & Chrome.





Black Nickel & Chrome

Satin Silver & Chrome


Specifications

Description: Full depth inset gas fire Type of Heat: Radiant & Convected

	Remote	Manual
Useful energy efficiency	82.6%	82.3%
Energy efficiency class	С	D
Fuel type	Natural gas	
Direct heat output	4.0kW	
Colour	Model Number	Model Number
Black Nickel & Chrome	FLBLBCRN	FLBLBCMN
Black Nickel & Black	FLBLNBRN	FLBLNBMN
Satin Silver & Chrome	FLBLSCRN	FLBLSCMN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally

Dimensions



































Caress HE

Useful energy efficiency 86%

The Caress HE glass fronted gas fire features an authentic looking coal fuel effect, and stylish trim and fret in a choice of Traditional or Contemporary styling in solid cast brass or chrome cast iron. It features a heat output of up to 4kW and an energy efficiency of up to 86.3%.

Each model is available in a range of control options and there is an LPG model for homes without a natural gas supply.

FHEC11RN2

Specifications

Description: Full depth inset gas fire Type of Heat: Radiant & Convected


FHEC3RRN2

Energy efficiency class		С	
Fuel type		Natural gas	
Direct heat output		3.9kW	
		Contemporary	Traditional
Control type	Colour	Model Number	
Slide	Brass		FHEC41SN
Silde	Chrome	FHECGRSN	

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



B 510mm C 550mm D 230mm









Caress HE Contemporary

highefficiency Conventional Flue - Hearth Inset - Glass Fronted



Decadence HE

The Decadence HE high efficiency glass fronted gas fire with an energy efficiency of 84.3%. It is available in a choice three beautiful high quality cast iron fascias - gold, chrome or black nickel plated finishes.

Specifications

Description: Full depth inset gas fire Type of Heat: Radiant & Convected


	HE Remote
Useful energy efficiency	84.3%
Energy efficiency class	С
Fuel type	Natural gas
Direct heat output	3.4kW
Colour	Model numbe
Gold	FHKCDBRN3
Gold	TTINGDDDING
Chrome	FHKCDCRN3

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



Dimensions

B 529mm C 550mm D 180mm E 365mm











Black nickel





Ecodesign Compliant

Kenilworth HE

The Kenilworth gas fire features a welcoming full depth coal fuel effect and will fit most chimney and flue types including a pre-cast flue with a 3" rebate on the fire surround.

Specifications

Description: Full depth inset gas fire Type of Heat: Radiant & Convected

	Manual	Remote
Useful energy efficiency	84.3%	84.3%
Energy efficiency class	D	С
Fuel type	Natural gas	Natural gas
Direct heat output	3.4kW	3.4kW
Colour	Model Number	
Brass	FHKC14MN2	FHKC14RN3
Black	FHKC26MN2	FHKC26RN3
Chrome	FHKC37MN2	FHKC37RN3

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



A 595mm B 500mm C 550mm D 180mm E 365mm







Kenilworth HE



Kenilworth HE

highefficiency Conventional Flue - Hearth Inset - Glass Fronted



Linear HE

The Linear is a stunning modern design with the combination of black ribbed back panels and chrome fascia. This full depth gas fire delivers a wonderful flickering glow and can be installed into almost any chimney or flue including a pre-cast flue with a 3" rebated surround.

Specifications

Description: Full depth inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency			84.3%
Energy efficiency class			D
Fuel type			Natural gas
Direct heat output			3.4kW
Fuel effect	Control type	Colour	Model Number
Coal		Chrome	FHLCXOMN2
Pebble	Manual		FHLPXOMN2

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



Dimensions

A 595mm B 483mm C 550mm D 180mm E 365mm





Linear HE with pebble fuel effect





Windsor Contemporary HE


Stunning styling makes the Windsor Contemporary glass fronted high efficiency gas fire the centrepiece of your room. This slimline model will fit almost any chimney or flue, including pre-cast (BS EN 1858), and comes with a smart chrome fascia.

3, 3, 3, 3, 3, 3, 3, 3, 3, 3, 3, 3, 3, 3			
Useful energy efficiency			81.3%
Energy efficiency class			D
Fuel type			Natural gas
Direct heat output			2.9kW
Fuel effect	Control type	Colour	Model Number
Coal	Manual	Chrome	FSHCUOMN
Pehble	Chrome		FSHPUOMN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



- A 592mm B 475mm C 550mm D 125mm E 327mm







highefficiency Conventional Flue - Hearth Inset - Glass Fronted



Windsor Traditional HE

The Windsor Traditional HE glass fronted gas fire offers exceptional heat output of 2.9kW with an energy efficiency of 81.3% and is available in manual or slide control.

Specifications

Description: Slimline inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		81.3%
Energy efficiency class		D
Fuel type		Natural gas
Direct heat outp	ut	2.9kW
Control type	Colour	Model Number
Manual	Brass	FSHC11MN
IVIariuai	Chrome	FSHC3JMN
Slide	Brass	FSHC11SN2
	Chromo	ECFICS ICVIS

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



Dimensions











Windsor Traditional HE





Richmond Plus & Richmond


You can now achieve the look of a real open coal fire, combined with the convenience of gas fuel. The Richmond full depth convector fire combines a brilliant flame effect with high efficiency and outstanding warmth. The Richmond features a Standard trim and Dallas fret and is available in black, chrome or brass finishes.

Description: Full depth inset gas fire Type of Heat: Radiant & Convected

Richmond Plus	
Useful energy efficiency	66.7%
Energy efficiency class	F
Fuel type	Natural gas
Direct heat output	4.1kW
1	

	Model Number		
Colour	Manual	Slide	Remote
Brass	FOPC12MN	FOPC12SN	FOPC12RN2
Black	FOPC23MN	FOPC23SN	FOPC23RN2
Chrome	FOPC37MN	FOPC37SN	FOPC37RN2

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



	Model Number		
Colour	Manual	Slide	
Brass		FICC42SN	

Richmond Plus

Dimensions

Richmond Plus

A 600mm B 498mm C 548mm

D 223mm

E 400mm

Richmond

A 595mm

B 500mm C 550mm D 250mm E 400mm

Richmond Plus

highefficiency Conventional Flue - Hearth Inset - Open Fronted



Caress Plus

The Caress Plus features an authentic looking coal fuel effect, and stylish trim and fret in a choice of Traditional or Contemporary styling in solid cast brass or chrome cast iron. The Caress Plus open-fronted model has been designed to provide an energy efficiency of 68.3% and a heat output at 4.2kW. Each model is available in a range of control options.


Specifications

Description: Mid and full depth inset gas fire Type of Heat: Radiant & Convected


Caress Plus				
Useful er	nergy efficie	ency	68	.3%
Energy eff	ficiency class		F	
Fuel type			Na	tural gas
Direct he	eat output		4.2	2kW
	c		Contemporary Traditional	
Control	Colour	Model Number		
Manual	Brass			FKPC11MN
IVIariual	Chrome	FKPC3RM	N	
Slide	Brass	FKPC45SI	V	FKPC41SN
Slide	Chrome	FKPC6RSN		FKPC6JSN
Remote	Brass			FKPC11RN2
Hernote	Chrome	FKPC3RRI	N2	

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally





E 365mm







Caress Plus Traditional





Calypso Plus

The Calypso Plus successfully combines exceptional fire design with today's necessity for convenience in the form of a user friendly dual directional slide control. This fire will be equally at home in a contemporary or traditional fire surround and room setting.

Specifications


Description: Full depth inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency	68.3%	67%
Energy efficiency class	F	F
Fuel type	Natural gas	LPG
Direct heat output	4.2kW	4.2kW
0		

FKPC42SN FKPC42SP Safety: Flame Supervision Device & Airwatch System

Air vent required: Not normally





highefficiency Conventional Flue - Hearth Inset - Open Fronted



Rhapsody Plus

The classic Rhapsody Plus open fronted fire has a very realistic deep fuel effect and beautiful flame picture making it indisguisable from a real coal fire. With an elegant arched trim and striking fret they are a timeless classic.

Specifications

Description: Slimline inset gas fire Type of Heat: Radiant & Convected


Useful energ	gy efficiency	68.3%	6/%
Energy efficier	ncy class	F	F
Fuel type		Natural gas	LPG
Direct heat output		4.2kW	4.2kW
Control	Colour	Model Num	ber

	Control	Colour	Model Num	ber
		Brass	FKPCBRSN	FKPCBRS
Slide	Slide	Antique Brass	FKPCBBSN	FKPCBBS
		Black	FKPCBLSN	FKPCBLS
		Chrome	FKPCSLSN	FKPCSLS


Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally

















Decadence Plus

The Decadence Plus is a striking open fronted coal effect gas fire which features a choice of three beautiful high quality cast iron fascias available in a choice of gold, chrome or black nickel plated finishes.


Specifications

Description: Mid depth inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		68.3%
Energy efficiency class	S	F
Fuel type		Natural gas
Direct heat output		4.2kW
Control type	Colour	Model Number
	Gold	FKPCDBSN
Slide	Chrome	FKPCDCSN
	Black Nickel	FKPCDNSN
	Gold	FKPCDBRN2
Remote	Chrome	FKPCDCRN2
	Black Nickel	FKPCDNRN2

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally

- A 631mm B 529mm C 550mm D 170mm E 365mm









Decadence Plus



Decadence Plus

highefficiency Conventional Flue - Hearth Inset - Open Fronted



Linear Plus

The Linear is a stunning modern design with the combination of black ribbed back panels and chrome fascia. This deep fuelbed gas fire delivers a wonderful flame effect and can be installed into almost any chimney or flue including a pre-cast flue with a 3" rebated surround.

Specifications

Description: Mid depth inset gas fire Type of Heat: Radiant & Convected


Useful energy efficiency		68.3%
Energy efficiency class		F
Fuel type		Natural gas
Direct heat output		4.2kW
Fuel Effect Control type Colour		Model Number
Coal Manual Chrome		FKPCUOMN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally





Dimensions











Kenilworth Plus

The Kenilworth gas fire features a welcoming deep coal fuel effect that will fit most chimney and flue types including a pre-cast flue with a 3"rebate on the fire surround.

Specifications

•			
Description: Mid depth inset gas fire			
Useful energy effic	iency	68.3%	
Energy efficiency class	s	F	
Fuel type		Natural gas	
Direct heat output		4.2kW	
Control type	Colour	Model Number	
	Brass	FKPC14MN	
Manual	Chrome (Grace)	FKPC37MN	
	Black	FKPC26MN	
	Brass	FKPC14SN	
Slide	Chrome (Grace)	FKPC37SN	
	Black	FKPC26SN	
	Brass	FKPC14RN2	
Remote	Chrome (Grace)	FKPC37RN2	
	Black	FKPC26RN2	

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally


























Kenilworth Plus in black with Blenheim fret



Kenilworth Plus in chrome with Grace fret

highefficiency Conventional Flue - Hearth Inset - Open Fronted



Expression Plus


The Flavel Expression Plus high efficiency gas fire boasts an impressive 68.3% Energy efficiency and can be installed in to almost any chimney or flue, including pre-cast when fitted with a 3" rebated fire surround. This open-fronted gas fire features a coal fuel effect and comes with a contemporary chrome one-piece fascia. This fire is available with manual control, slide control, or fully automatic remote control.

Specifications

Useful energy efficiency		68.3%
Energy efficiency class		F
Fuel type		Natural gas
Direct heat output		4.2kW
Control type Colour		Model Number
Slide	Chrome	FKPCEPSN
Remote	Chrome	FKPCEPRN2

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally













Windsor Contemporary Plus

Stunning styling makes the Windsor Contemporary Plus the centrepiece of your room. This slimline gas fire will fit almost any chimney or flue, including pre-cast (BS EN 1858) and achieves an impressive 66.8% energy efficiency with a 4.0kW heat output.


Useful energy efficiency			66.8%
Energy efficiency class			F
Fuel type			Natural gas
Direct heat output			4.0kW
Fuel Effect	Control type	Colour	Model Number
Coal	Manual	Chrome	FSPCUOMN
Pebble	Manual Chrome		FSPPUOMN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



Dimensions

- A 592mm B 475mm C 548mm D 120mm









Windsor Contemporary Plus

highefficiency Conventional Flue - Hearth Inset - Open Fronted



Windsor Traditional Plus

The Windsor Traditional Plus is an open fronted high efficiency gas fire combining an exceptional heat output of 4.0kW and an energy efficiency of 66.8%. This fire is perfect for homes where a more traditional styling is needed to complement the décor.

Specifications


Description: Slimline inset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		66.8%	
Energy efficiency class		F	
Fuel type		Natural gas	
Direct heat output		4.0kW	
Control type Colour		Model Number	
Manual Brass		FSPC11MN	

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally









highefficiency Conventional & Balanced Flue - Hearth Outset - Glass Fronted



Emberglow

The Emberglow high efficiency outset gas fire features an elegant design with high quality cast iron canopy and fire front. With front and side windows the mesmerising dancing flames can be seen from all angles and it is operated by an easy to use electronic side control system. The main image represents the natural gas model. The flame picture may

Specifications

differ on LPG model.

	ES	Remote	ES	Manual
	Convention	al		Balanced
Useful energy efficiency	78.7%	81.6%	82.2%	86.9%
Energy efficiency class	Е	D	D	С
Fuel type	Natural gas		LPG	Natural gas
Direct heat output	4.2kW	4.4kW	4.2kW	4.3kW

Model Number FEMCOOEN FEMCOORN2 FEMCOOEP FEBCOOMN

Safety: Flame Supervision Device & Airwatch System (not applicable to balanced flue model) Air vent required: Not normally



highefficiency Conventional Flue - Hearth Outset - Glass Fronted



Renoir

The Renoir outset living flame effect gas fire features a beautiful flickering flame effect and is operated by an electronic side control system to make it much easier to ignite the fire. This classically designed fire has an impressive heat output of up to 4.4kW and energy efficiency of up to 81.6%.

Specifications

		ES	Remote
Useful energy efficiency		78.7%	81.6%
Energy efficiency class		E	D
Fuel type		Natural gas	Natural gas
Direct heat output	Direct heat output		4.4kW
	Colour	Model Number	
	Black	FRECNOEN	FRECNORN2
	Propzo	EDECDOEN	EDECDUDNIS

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally





Emberglow A 703mm B 684mm C 324mm







highefficiency Conventional Flue - Hearth Outset - Open Fronted



Regent

One of the most popular radiant fires in the UK, the Regent features a slim design and has an energy efficiency of 74%. The Regent is available in a choice of black or bronze finishes and is operated by electronic side control.

Specifications

Description: Full depth outset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		74%
Energy efficiency class		Е
Fuel type		Natural gas
Direct heat output		4.5kW
Control type Colour		Model Number
Electronic Side	Black	FRGCNOEN
Electronic Side	Bronze	FRGCPOEN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally
















Welcome

The Welcome's beautiful electrically illuminated coal effect brings life to the room even when the heat is off, providing a charming focal point to any room. It also has a 74% energy efficiency, resulting in lower running costs.

Specifications


Description: Full dep	oth outset gas fire	Тур	oe of Heat: Radiant & Convected
Useful energy efficiency			74%
Energy efficiency class		E	
Fuel type		Natural gas	
Direct heat output		4.5kW	
Control type Colour		Model Number	
Electronic Side	Black		FWERNOEN
	Bronze		FWERROEN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally





Dimensions





Welcome in black





Strata

The Strata offers an incredible energy efficiency of 82% and 5.2kW heat output. It has a stylish contemporary look with soft, curved lines and is available in a choice of three colour options. Can be wall mounted.

Specifications

Useful energy efficiency		iency	82%	
Energy efficiency class		5	D	
Fuel type			Natural gas	
	Direct heat output		5.2kW	
	Control type	Colour	Model Number	
		Black	FORSBLEN	
	Electronic Top	Brown	FORSBOEN	
		Cream	FORSCOEN	

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally







highefficiency Conventional Flue - Hearth Outset - Open Fronted



Misermatic

Incredible 82% energy efficiency and adaptability; the Misermatic has them both. Available in a range of wood finishes, this fire can be wall or hearth mounted with an easily accessible top mounted control. Can be wall mounted.

Specifications

Description: Slimline outset gas fire Type of Heat: Radiant & Convected


Useful energy efficiency		82%
Energy efficiency class		D
Fuel type		Natural gas
Direct heat output		5.2kW
		ı
Control type	Colour	Model Number
Mahogany		FORMMOEN
Electronic Ton	Teak	FORMTOEN
Electronic Top	Light Oak	FORMLOEN


FORMNOEN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally

Medium Oak











Misermatic in mahogany

Misermatic in teak

Misermatic in medium oak





Renaissance

The Renaissance provides a natural talking point the moment you enter the room. Its stylish retro design is matched by its forward thinking simplicity of installation, impressive 5.2kW heat output and astounding 82% energy efficiency. Can be wall mounted.


Specifications


Description: Slimline outset gas fire Type of Heat: Radiant & Convected

Useful energy efficiency		82%
Energy efficiency class		D
Fuel type		Natural gas
Direct heat output		5.2kW
Control type Colour		Model Number
Electronic Top	Silver	FORRSOEN
	Black	FORRBOEN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally

A 652mm B 730mm C 200mm D 37mm E 60mm







Renaissance in black

highefficiency Conventional Flue - Hearth Outset - Open Fronted



Firenza

The compact and economical Firenza can be wall or hearth mounted and has an energy efficiency of 80.1%. The control handle is located on the top panel for ease of use.

Specifications

Description: Slimline outset gas fire Type of Heat: Radiant & Convected


Useful energy efficiency		80.1%
Energy efficiency class		D
Fuel type		Natural gas
Direct heat output		3.8kW
Control type Colour		Model Number
Top	Black	FFIRZ1MN
Тор	Bronze	FFIRROMN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally















highefficiency

Balanced Flue - Hearth Inset - Glass Fronted



Calibre BF


The Calibre Balanced Flue gas fire boasts an energy efficiency of 93.5%and features a full depth coal fuel effect. This glass fronted fire has an exceptionally large viewing area and is available in a choice of brass or chrome.

Description: Full depth inset gas fire Type of Heat: Radiant & Convected Useful energy efficiency 93.5%

Energy efficie	В		
Fuel type	Natural gas		
Direct heat	3.9kW		
Fuel effect Control type Colour		Model Number	
	Manual	Brass	FBFC1SMN2
Coal		Chrome	FBFC37MN2
	Remote	Brass	FBFC1SRN3
	nemote	Chrome	FBFC37RN3

Safety: Flame Supervision Device Air vent required: Not normally

Dimensions



*Differs on EFC models. An optional flue extension is available to increase maximum length to 1015mm or manual and 973mm on EFC models.



highefficiency Balanced Flue - Hearth Inset - Glass Fronted



Orchestra BF

If you want the warmth and mood created by a living flame fire yet don't have a chimney or flue, then the Orchestra is the perfect solution. This neat, glass fronted inset fire with an energy efficiency of 80% is framed by a chamfered trim and sleek fret.

Specifications

Description: Slimline inset gas fire			
Useful energy effic	iency	80%	
Energy efficiency class		E	
Fuel type		Natural gas	
Direct heat output		2.7kW	
Control type Colour		Model Number	
Manual	Satin Silver	FBFN98G	
	Brass	FBFN76G	

Safety: Flame Supervision Device Air vent required: Not normally



Dimensions

A 620mm B 470mm

C 580mm

D 125mm

E 95mm

H 400mm I 145mm

F 435mm

G 675mm max - 130mm min













standardfires

Conventional Flue - Wall Inset - Open Fronted

Windsor Contemporary

The Windsor Wall inset open fronted gas fire is available in a choice of coal or pebble fuel bed and features a large viewing window. This extremely versatile fire will fit into almost any chimney or flue and comes in a chrome finish.

Specifications

Fuel type			Natural gas
Direct heat output			2.7kW
Fuel effect	Control type	Colour	Model Number
Coal	Manual	Channa	FSRCHWMN
Pebble	Manual	Chrome	FSRPHWMN


Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally

This product is not suitable for primary heating purposes.



Dimensions

B 512mm C 550mm D 120mm E 329mm











Windsor Contemporary with coal fuel effect

standardfires

Conventional Flue - Wall Inset - Open Fronted

Finesse

The most versatile hole-in-the-wall gas fire from Flavel. The Finesse will fit virtually any flue and is available in three different variations – a brass trim option with coal fuel effect to suit a classical setting and a chrome trim option with a choice of coal or pebble fuel effect.

Specifications

Description: Slimline inset gas fire Type of Heat: Radiant

Fuel type			Natural gas
Direct heat output			2.7kW
Fuel effect	t Control type Colour		Model Number
Coal	Manual	Chrome	FSRCYYMN
Pebble	IVIdiludi	Chrome	FSRPYYMN

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally This product is not suitable for primary heating purposes.













- B 558mm C 550mm
- D 120mm E 329mm F 50mm





Finesse with pebble effect



standardfires

Conventional Flue - Hearth Inset - Open Fronted



Caress Slimline

The Caress Slimline gas fire features a fabulous, top quality cast trim and Blenheim fret in a choice of solid cast brass or chrome cast iron. Coal effect and flame picture differs on slide control models.

Specifications

Description: Slimline inset gas fire Type of Heat: Radiant Manual Control

Iviariaar Gorici Gi		
Fuel type		Natural gas
Direct heat output		2.7kW
Control type Colour		Model Number
Manual	Brass	FSRCBCMN
	Chrome	FSRCCCMN

This product is not suitable for primary heating purposes

Slide Control

iency	53.1%
3	F
	Natural gas
	3.1kW
Colour	Model Number
Colour	IVIOUEI IVUITIDEI
Brass	FNVCBCSN
	Colour

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



Caress Slimline Slide Control

A 615mm B 510mm

C 550mm D 105mm











Dimensions

Caress Slimline
Manual Control
A 615mm
B 510mm
C 550mm
D 120mm
E 329mm









*Caress Slimline Slide Control in brass cast iron

standardfires

Conventional - Hearth Inset - Open Fronted

Waverley

The Waverley, with its beautiful decorative flame effect, is a perfect replacement for a solid fuel grate. The 16" tapered inset tray is designed to fit a standard 16" fire back, providing a realistic coal effect for almost any style of fireplace.

Specifications

Description: Full depth inset tray Type of Heat: Radiant

Fuel type	Natural gas	
Direct heat output	2.7kW	
Control type	Model Number	
Manual	FITCOOMN	

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally

This product is not suitable for primary heating purposes













- B 205mm



Windsor Contemporary, Classic & Traditional

The versatile styling of the Windsor gas fires ensures that there is a style to suit any room. This slimline gas fire will fit almost any chimney or flue, including pre-cast (BS EN 1858).



Windsor Contemporary with satin silver fascia and pebble fuel effect



Windsor Contemporary with chrome fascia and driftwood fuel effect



with chrome trim and fret and coal fuel effect



















Specifications

	Fuel Type			Natural gas	
Direct heat output			2.7kW		
1	Windsor Con	temporary			
	Fuel effect	Control type	Colour	Model Number	
_	Coal		Chrome	FSRCUOMN	
	Guai		Brass	FSRCU1MN	
	Dalala	Manual	Chrome	FSRPUOMN	
	Pebble		Satin Silver	ESRP80MNI	

Windsor Traditional

Driftwood

Fuel effect	Control type	Colour	Model Number
Coal	Manual	Brass	FSRC1PMN
Guai	IVIdiludi	Channa	ECDCO IMANI

FSRDUOMN

Safety: Flame Supervision Device & Airwatch System

Air vent required: Not normally

This product is not suitable for primary heating purposes

Dimensions

Windsor Contemporary	Windsor Traditional	B	-D- -	
A 592mm	A 592mm		i)	
B 475mm	B 475mm			
C 550mm	C 550mm	ål l I I	ļ/	
D 120mm	D 120mm		ĭI II	
E 329mm	E 329mm			E





standardfires

Conventional Flue - Hearth Inset - Open Fronted



Ecodesign Compliant

Conventional - Hearth Outset - Open Fronted



Melody

The Melody is an elegant slimline fire enabling installation in almost any flue including pre-cast. The discreet slide control ensures convenient operation with a heat output of 3.1kW.

Specifications

Description: Slimline inset gas fire Type of Heat: Radiant


Useful energy efficiency		53.1%	
Energy efficiency class		F	
Fuel type		Natural gas	
Direct heat output		3.1kW	
Control type	Colour	Model Number	
Slide	Chrome	FDRN68G	
	Brass	FDRN45G	
	Antique Brass	FDRN46G	
	Black	FDRN57G	

Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally



Dimensions

A 605mm B 491mm C 550mm D 105mm E 325mm









Melody in antique brass Melody in black



standardfires



Regent LFE

One of the most popular radiant fires in the UK, The Regent LFE is slim for a neat fit into an existing fireplace and is highly efficient. It provides radiant and convected heat and is an elegant interpretation of the Regency period.

Specifications

Description: Full depth outset gas fire Type of Heat: Radiant

Useful energy efficiency		iency	59.3%	
	Energy efficiency class	6	F	
	Fuel type		Natural gas	
	Direct heat output		3.3kW	
	Control type	Colour	Model Number	
	Electronic Side	Black	FRLCNOEN	
	Electronic Side	Bronze	FRLCPOEN	
	Remote	Black	FRLCNORN2	
	nemute	Bronze	FRLCPORN2	


Safety: Flame Supervision Device & Airwatch System Air vent required: Not normally





A 680mm B 710mm C 255mm







Calculating your Flavel gas fires running costs

Despite rising fuel prices, natural gas remains the most common and one of the cheapest ways to heat your home.

Since the cost of gas can differ depending on service provider, location and tariff we do not include estimated running costs for our products. However, you can estimate your own running costs easily using the following calculation:-



Windsor Traditional HE brass Page 23

Example

What is the running cost of the Windsor Traditional HE when used for 3 hours at a cost of 4.2p per kilowatt hour?



Online inspiration & information



Builders' Opening sizes

	Minimum Opening Width	Maximum Opening Width	Minimum Opening Height	Maximum Opening Height
Product				
Calibre BF	415mm	420mm	563mm	570mm
Calypso	400mm	450mm	550mm	570mm
Calypso Plus	370mm	440mm	550mm	570mm
Caress	400mm	450mm	550mm	570mm
Caress HE	400mm	450mm	550mm	570mm
Caress Plus	370mm	440mm	550mm	570mm
Caress Slimline SC	330mm	430mm	550mm	565mm
Caress Slimline MC	330mm	440mm	550mm	575mm
Curve	300mm	440mm	300mm	440mm
Decadence HE	370mm	450mm	550mm	570mm
Decadence Plus	370mm	440mm	550mm	570mm
Decadence Slimline	330mm	440mm	550mm	575mm
Diamond HE	370mm	450mm	550mm	570mm
Emberglow	305mm	440mm	500mm	650mm
Expression HE	370mm	450mm	550mm	570mm
Expression Plus	370mm	440mm	550mm	570mm
Finesse	330mm	430mm	550mm	575mm
Firenza	305mm	440mm	510mm	650mm
Jazz HE	650mm	660mm	460mm	470mm
Jazz BF	635mm	645mm	465mm	475mm
Kenilworth HE	370mm	450mm	550mm	570mm
Kenilworth Plus	370mm	440mm	550mm	570mm
Linear HE	370mm	450mm	550mm	570mm
Linear	375mm	440mm	550mm	570mm
Linear Plus	370mm	440mm	550mm	570mm
Melody	330mm	430mm	550mm	565mm
Misermatic	305mm	440mm	580mm	650mm
Orchestra BF	410mm	420mm	555mm	565mm
Regent	305mm	440mm	470mm	650mm
Regent LFE	305mm	440mm	525mm	650mm
Renaissance	305mm	440mm	580mm	650mm
Renoir	305mm	440mm	500mm	650mm
Rhapsody	400mm	450mm	550mm	570mm
Richmond	400mm	450mm	550mm	570mm
Richmond Plus	400mm	450mm	550mm	570mm
Rocco HE	750mm	760mm	520mm	530mm
Rocco BF	730mm	780mm	540mm	550mm
Romance	400mm	450mm	550mm	570mm
Sophia	760mm	790mm	870mm	880mm
Sophia Slimline BF	750mm	840mm	1025mm	1050mm
Strata	305mm	440mm	580mm	650mm
Waverley*	400mm	440mm	550mm	575mm
Waverley**	560mm	600mm	690mm	720mm
Welcome	305mm	440mm	470mm	650mm
Windsor	330mm	440mm	550mm	575mm
Windsor HE	330mm	440mm	550mm	575mm
Windsor Plus	330mm	440mm	550mm	575mm

^{*}when fitted into standard builders opening with existing chair-brick

WARNING BFM Europe Limited is a Gas Safe Registered company. We recommend that all of our fires are installed by Gas Safe Register engineers in accordance with our instructions.

DISCLAIMER Our policy is one of constant development and improvement. We therefore reserve the right to revise designs and specifications of our products without formal notice, patents pending. We always recommend our products be viewed in an approved showroom before purchase.

Whilst we have taken every care in the preparation of this brochure it is not intended to replace the installation manual which provides more detailed information.

Whilst we have taken every care in the preparation of this brochure it is not intended to replace the installation manual which provides more detailed information. Photography is for illustration purposes only and although every effort has been made to ensure accurate reproduction of typical installations and flame pictures they may vary according to fire model and flue types.

We accept no liability for any loss or damage arising directly or indirectly from the use of this brochure.

We recommend that all our fires are used in conjunction with central heating and not as a primary source of heat.

In the interests of personal safety a suitable fireguard is recommended when children, the elderly and the infirm are present.

(This brochure is copyright and must not be reproduced in whole or in any part without prior written permission).

^{**}when fitted with "Victorian" style casting



www.flavelfires.co.uk

Visit our Flavel website on your smart phone or tablet device, just scan in this QR code.

We would like to thank Kedleston Heating (01332 200303), Olde England Reproductions (01782 319350), Stanningley Firesides (0113 257 1512) and GB Mantles (01924 473243) for contributing fire surrounds to this brochure.













At the heart of your home

 $\label{eq:BFM-encoder} \begin{tabular}{ll} BFM Europe Limited, Trentham Lakes, Stoke-on-Trent, Staffordshire ST4 4TJ. \\ Tel: 01782 339000. www.flavelfires.co.uk e-mail: info@bfm-europe.com \end{tabular}$